



CATIA Teamcenter Interface

CMI Release 9.2

**Installation &
Administration Guide**

Copyright

© 2000, 2007 T-Systems Enterprise Services GmbH. All rights reserved.
Printed in Germany.

Contact

T-Systems Enterprise Services GmbH
Solution Center PLM
Fasanenweg 5
70771 Leinfelden-Echterdingen Germany
<http://www.cmi-support.com>
☎ +49 (0711) 972 - 49 657
✉ +49 (0711) 972 - 90 330
mail: cmi_support@t-systems.com

Manual History

Version	Date	Version	Date
1.0	November 1996	8.1	December 2001
2.0	February 1997	8.2	July 2002
3.0	July 1997	8.3	January 2003
4.1	March 1998	8.4	July 2003
4.2	December 1998	8.5	March 2004
4.3	May 1999	8.6	October 2004
7.0	September 1999	8.7	April 2005
7.1	April 2000	8.8	September 2005
7.2	July 2000	8.9	March 2006
7.3	September 2000	9.0	October 2006
7.4	December 2000	9.1	March 2007
8.0	August 2001	9.2	October 2007

This edition obsoletes all previous editions.

Trademarks

CATIA is a registered trademark of Dassault Systèmes.

Metaphase is a registered trademark of Metaphase Technology, Inc.

Teamcenter Enterprise is a registered trademark of UGS

Names of other products mentioned in this manual are used only for identification purpose and may be trademarks of their companies.

Preface

About this Guide

This guide provides installation and configuration information for the CATIA Metaphase Interface. Before using this guide, be sure you understand:

- the UNIX-based operating system
- the administration of the CATIA system
- the administration of Teamcenter Enterprise system

The advanced topics such as customizing tasks have been described in *CATIA Teamcenter Interface Customizing Guide*.

Related Documents

The following manuals contain information about installation, usage and customizing of CATIA Metaphase Interface:

Manual Title	Release
<i>CATIA Teamcenter Interface Installation & Administration Guide</i>	9.2
<i>CATIA Teamcenter Interface User's Manual</i>	9.2
<i>CATIA Teamcenter Interface Customizing Guide</i>	9.2

Your Comments are Welcome

Your comments on our publications are welcome. Please write us at:

T-Systems Enterprise Services GmbH

Solution Center PLM
Fasanenweg 5
70771 Leinfelden-Echterdingen

mail: cmi_support@t-systems.com



Table of Contents

CHAPTER 1	1
OVERVIEW	1
SYSTEM AND SOFTWARE REQUIREMENTS.....	1
SHIPMENT.....	2
DOCUMENTATION	2
LOADING THE SOFTWARE FROM CD-ROM.....	2
CHAPTER 2	5
ADAPTING TEAMCENTER ENTERPRISE	5
SERVER INSTALLATION	5
CMI INSTALLATION	5
MODIFICATIONS IN CONFIGURATION FILE	8
IMPLEMENTING OF CATIA LAUNCHING	15
INSTALLATION OF RULES.....	15
CMI SETTINGS WITHIN PDM CONFIGURATION FILE.....	15
UPGRADE OF CMI.....	16
UPGRADE OF CMI-RULES	18
CHAPTER 3	19
INSTALL LISTENER	19
CHAPTER 4	21
ADAPTING CATIA V4	21
LOADING CATEDM SOFTWARE FROM CD-ROM.....	21
CATEDM INSTALLATION	21
<i>Configuring the installation</i>	21
<i>Installation</i>	23
DIRECTORIES	25
FILES.....	26
<i>doc/README_FIRST.txt</i>	26
<i>doc/WHATSNEW.txt</i>	26
<i>doc/README.environment</i>	26
<i>data/xt0request.sh</i>	26
<i>data/ini.env</i>	26
<i>data/METAPHSE.include</i>	26
<i>data/appdefault.obj</i>	26
<i>data/ERREDB</i>	26
<i>data/dshdrawingframe.sh</i>	26
<i>data/cleanbox</i>	26
<i>data/plotconf</i>	26
<i>data/catiaedb.msg</i>	27
<i>data/catiaedb.menu</i>	27
<i>data/edmhlp.conf</i>	27
<i>\$HOME/exchangemap</i>	27
<i>\$HOME/.dshcatiarc.obj</i>	27
MODIFY CATIA V4 ENVIRONMENT.....	27
USER DEPENDENT CONFIGURATIONS	27
CHAPTER 5	33
ADAPTING CATIA V5	33
LOADING CMICATV5 SOFTWARE FROM CD-ROM.....	33
CMICATV5 INSTALLATION	34
<i>Configuring the installation</i>	34
USER DEPENDENT CONFIGURATIONS	41
<i>Testing the installation</i>	42
CHAPTER 6	45
CMI LICENSE MANAGER INSTALLATION	45
REMARKS	45

Figures

FIGURE 1: CATEDM INSTALLATION PATH STRUCTURE.....	25
FIGURE 2: INITIALIZATION FILES WITH THEIR ORDER.....	28
FIGURE 3: DIRECTORY STRUCTURE OF THE CMICATV5 INSTALLATION FILES.....	34
FIGURE 4: CATIA V5 GENERAL->GENERAL SETTINGS.....	43
FIGURE 5: CATIA V5 GENERAL->DOCUMENT SETTINGS.....	43

CHAPTER 1

Overview

The installation of the CATIA Metaphase Interface (CMI) consists of three parts. The first step is to modify and extend your Teamcenter Enterprise installation. The second step is to install the CMI listener, a program responsible for the communication between CATIA and Teamcenter Enterprise. Finally, during the third step the CMI Catia modules have to be installed for completing the Teamcenter Enterprise CATIA integration.

System and Software Requirements

Server Installation of Teamcenter Enterprise 2005, 2005 SR1 or 2007 on the following operation systems:

supported platforms for Teamcenter Enterprise 4.0 Server:	AIX	5.1
	HP-UX	11
	SGI IRIX	6.5
	SUN Solaris	2.7 / 8
	Windows	2000/XP
supported platforms for Teamcenter Enterprise 5.0 Server:	AIX	5.1
	HP-UX	11
	SUN Solaris	8
	Windows	2000/XP
supported platforms for Teamcenter Enterprise 5.1 Server:	AIX	5.1
	HP-UX	11
	SUN Solaris	8
	Windows	2000/XP

CATIA V4 Client Version 4.2.0 - 4.2.4 on the following operation systems:

CATIA V4 Client:	AIX	4.3/5.1
	HP-UX	1020 / 11
	SGI IRIX	6.5
	SUN Solaris	2.7 / 8

CATIA V5 Client Version V5R15, V5R16, V5R17 on the following operation systems:

CATIA V5 Client:	AIX	5.1 (32/64Bit)
	HP-UX	11

SGI IRIX	6.5
SUN Solaris	8
Windows	2000/XP (32/64)

Shipment

The software will be delivered on a CD-ROM in ISO-9660 format containing the following parts (depending on desired operating system architecture):

CATIA V4 extension	<catedm>
CATIA V5 extension	<cmicatV5>
Licman 1.2 license manager	<licman12>
Team Center servers (4.0, 5.0, 5.1)	<gmi> and <cmi>
CATIA Team Center connection	<cmilis>
Customizing examples	<custom>
Documents	<doc>

Documentation

The documentation consists of three parts:

Manual Title	Release
<i>CATIA Teamcenter Interface Installation & Administration Guide</i>	9.2
<i>CATIA Teamcenter Interface User's Manual</i>	9.2
<i>CATIA Teamcenter Interface Customizing Guide</i>	9.2

The documentation can also be delivered as printed (one example per each part). They can be used as copy master.

Loading the Software from CD-ROM

The CMI product family software is distributed on a ISO-9660 formatted CD-ROM ("High Sierra", hfs, cdfs). Magnetic tape distribution is optionally available. The following steps describe how to mount the software CD-ROM.

Log in as root user to a host with a CD-ROM drive. If your host does not have a CD-ROM drive, log into another host that is NFS-accessible to the installation host.

(If necessary) Create a mount-point directory for the CD-ROM:

```
# mkdir /cdrom
```

Place the CMI CD-ROM in the drive. On Solaris and SGI hosts, the volume manager mounts the CD-ROM automatically, so you can skip the next step.

Mount the CD-ROM:

Note: CD-ROM device names vary from host to host. Thus, you may need to adjust the mount command listed below.

Architecture	Mnemonic	Mount Command
Solaris	solaris2	not necessary
HP-UX	hpux	<code>mount -F cdrfs -r /dev/dsk/c3d0s2 /cdrom</code>
IRIX 6	mips	not necessary
AIX 4	aix	<code>mount -o ro -v cdrfs /dev/cd0 /cdrom</code>

If the CD-ROM drive is not on the installation host, use NFS facilities to export the CD-ROM drive's mount point from its host, and mount it on the installation host. For example:

On the host with the CD-ROM drive:

```
# exportfs -i -o ro /cdrom
```

On the installation host:

```
# mount drive-host:/cdrom /cdrom
```



CHAPTER 2

Adapting Teamcenter Enterprise

Your existing Teamcenter Enterprise environment should be extended to install the CATIA Metaphase Interface. The new server should be integrated into the existing environment (default **\$MTI_ROOT**). Any existing CMI installation should have been adapted.

Server Installation

The CATIA Metaphase Interface contains two Teamcenter Enterprise custom servers, GMI (Generic Metaphase Interface) and CMI (CATIA Metaphase Interface). A third server CCS is not needed for a standard installation.

The CMI server bases on GMI server methods to perform some general tasks, such as creating own windows, launch CATIA etc. Therefore the GMI server should be installed first. The installation is processed in the same way as with other Teamcenter Enterprise servers (by help of the `cfgedit2` utility). For more information please refer to the „*Installation Guide for UNIX and Windows NT*“ of Teamcenter Enterprise. Following the installation of this two servers will be described.

CMI Installation

The following steps describe how to install the CMI servers.

Mount CD-ROM. See chapter “*Loading the Software from CD-ROM*” on page 1.

Log in as the Metaphase administrator (i.e. `pdmadmin`):

```
# su - pdmadmin
```

Change to your installation directory:

```
# cd $MTI_ROOT/install
```

Choose your desired operating system mnemonic (Please refer to the mnemonics in chapter “*Loading the Software from CD-ROM*” on page 1).

The mnemonic “`nt_os`” will be chosen as an example for the following steps.

Copy the server information files from the CD-ROM GMI and CMI directories to your installation location:


```
“tcgmi.dat”
```

```
“toccmi.dat”
```


```
“cfggmi.dat”
```

```
“cfgcmi.dat”
```


First of all the Collaboration Foundation 2.0 or Teamcenter Enterprise 3.x/4.0 License Manager has to run. Then source pdmsetup in \$MTI_ROOT\config and start cfigedit or cfigedit2 in \$MTI_ROOT\install

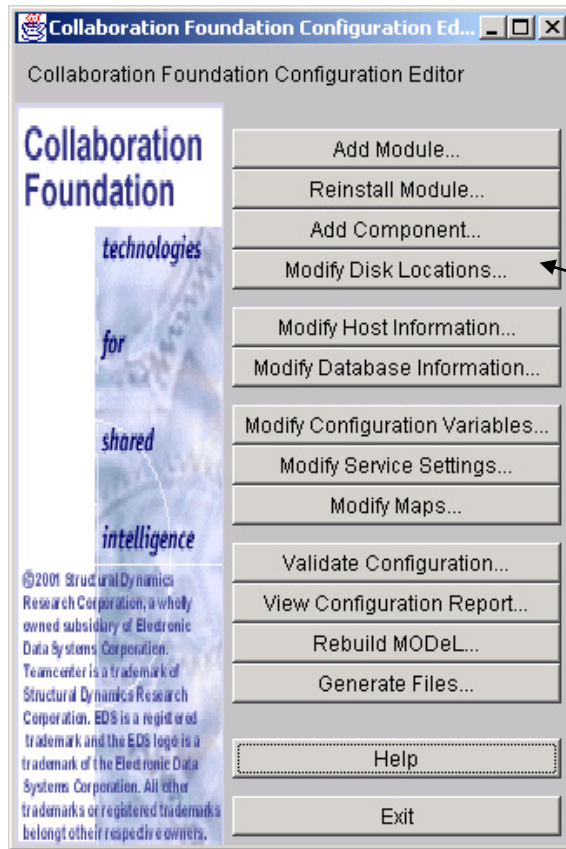


Click Modify Disk Location

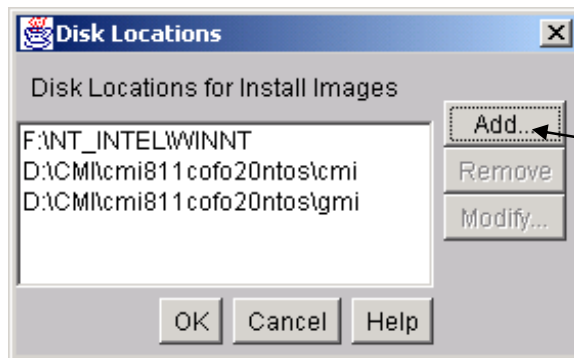


Click Add...

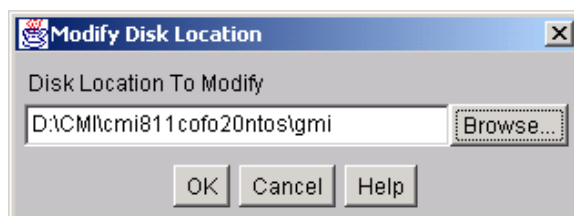

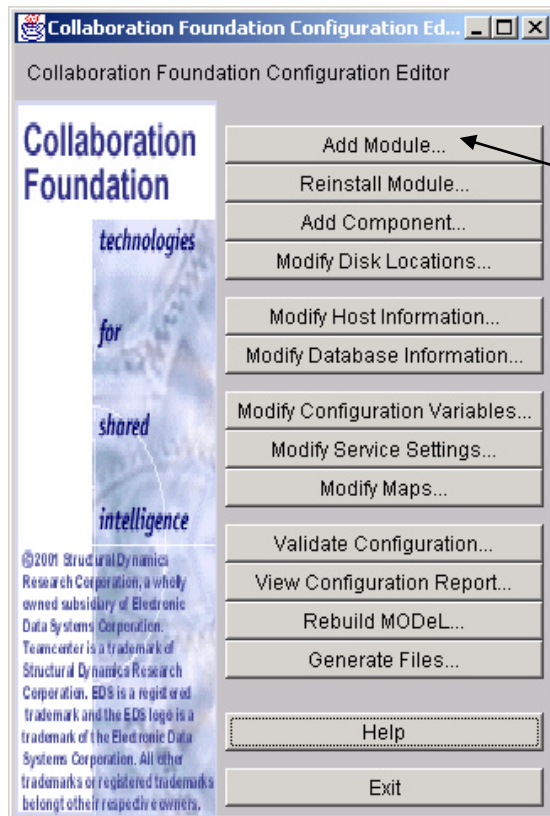

Click Add Module....

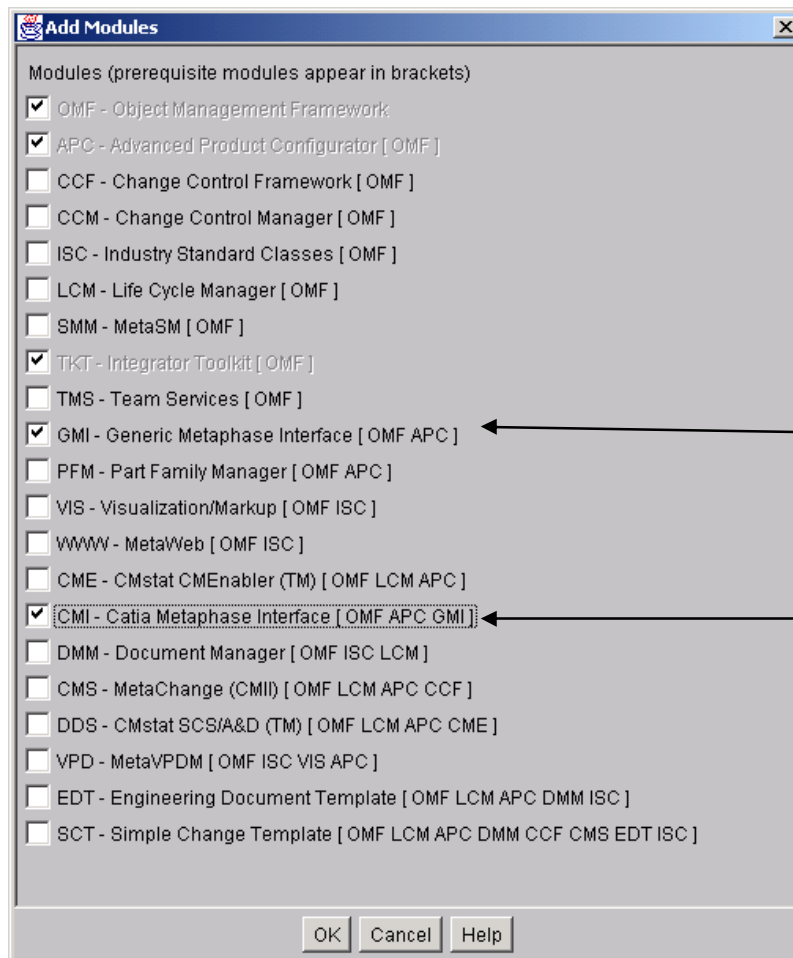

Select GMI

Select CMI


Confirm with OK


Modifications in configuration file

The following steps will be done by the installation script. The parameters of the GMI and CMI servers should be modified manually.

The CMI and GMI servers are registered in the file `$PDM_CONFIG (config.cfg)`, which indicates the computer where they have been installed.


Please select the “Modify Service Settings” on the dialog window.

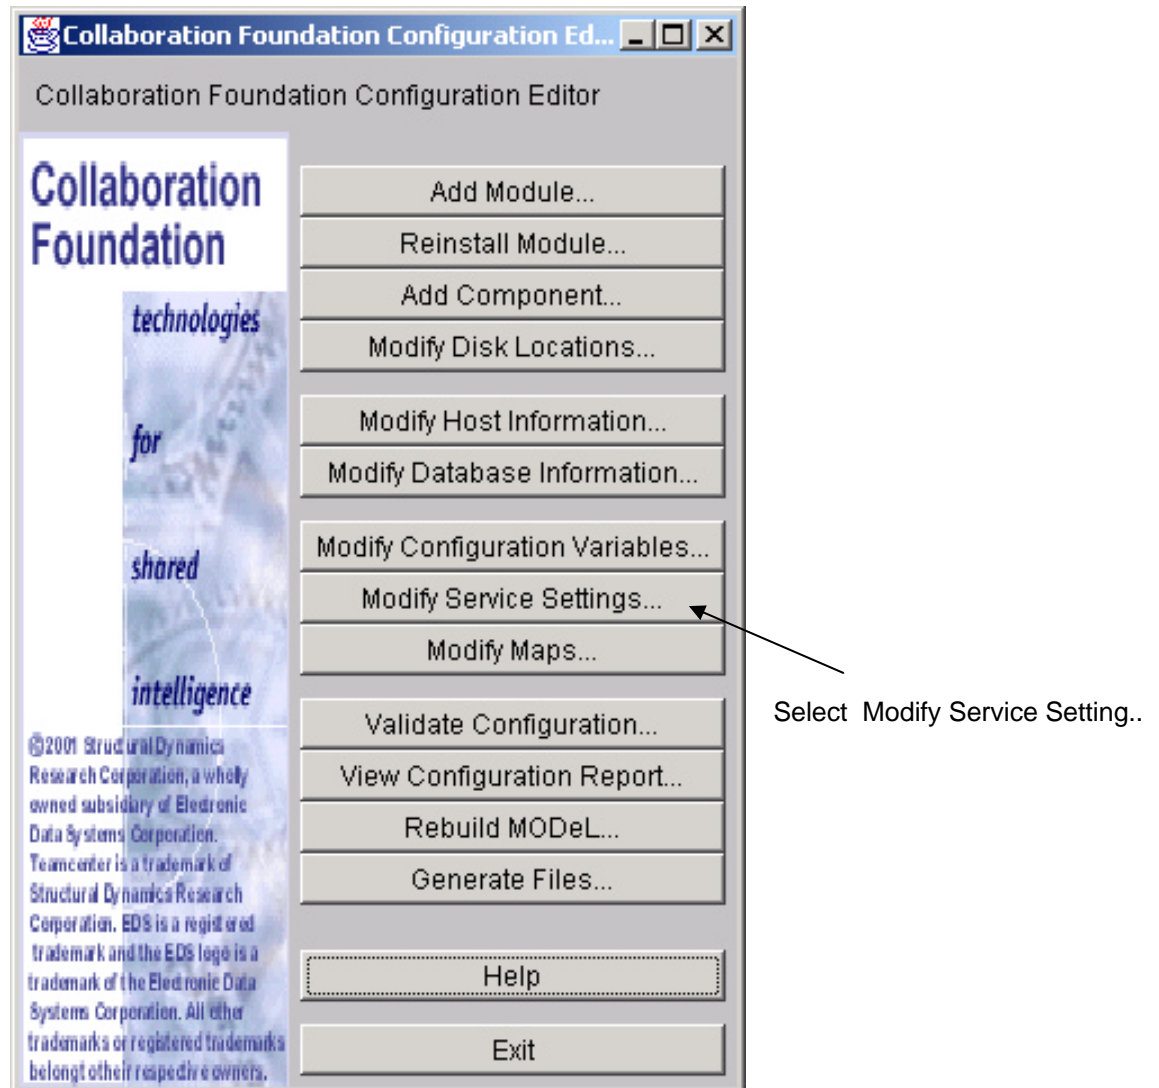

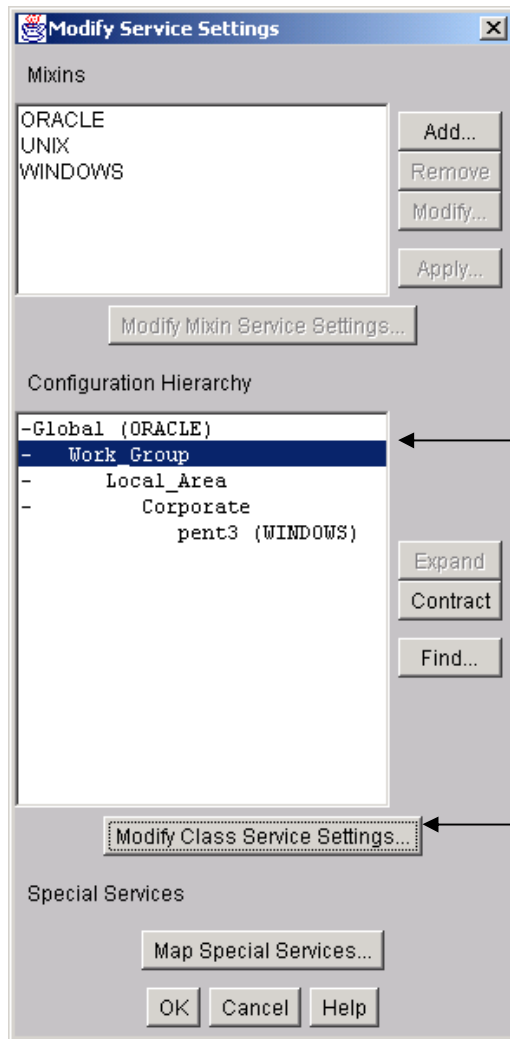


Select Work_Group

Click Class Service Settings...

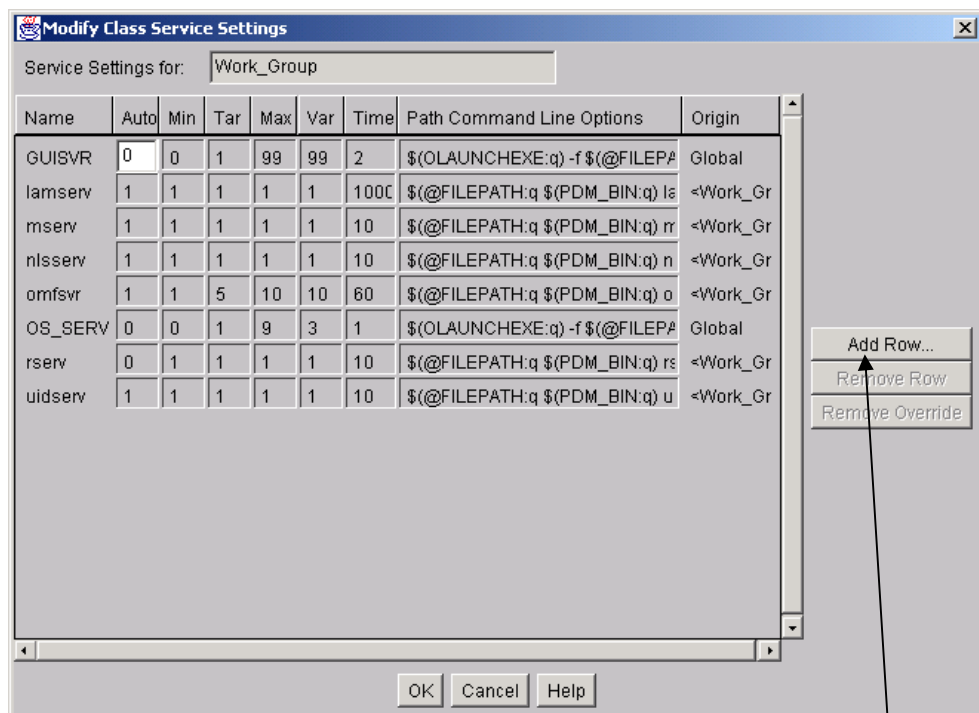

Click Add Row...

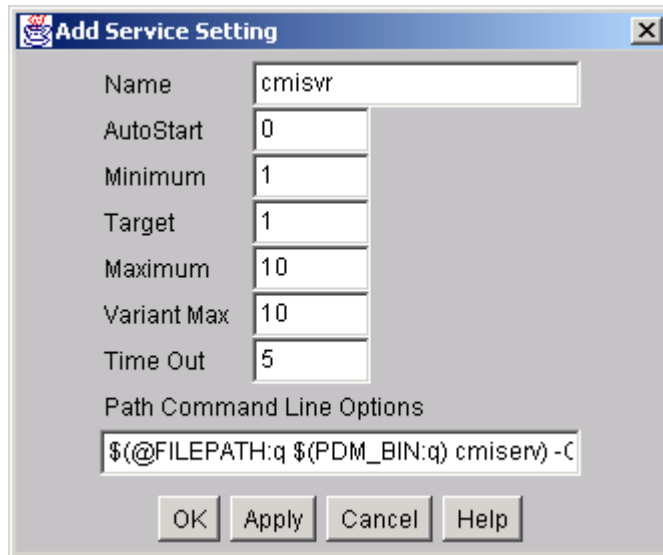


Confirm with "APPLY" and set the same options for gmisvr.

The following configuration will be added automatically by the installation script:


```
insert service.cfg host = {hosts_gmi}
    gmisvr "0 1 1 10 10 5 $(@FILEPATH:q $(PDM_BIN:q) gmiserv) -C 250"
;
insert service.cfg host = {hosts_cmi}
    cmisvr "0 1 1 10 10 5 $(@FILEPATH:q $(PDM_BIN:q) cmiserv) -C 250"
;
```

Modify Class Service Settings								
Service Settings for: Work_Group								
Name	Auto	Min	Tar	Max	Var	Time	Path Command Line Options	Origin
cmisvr	0	1	1	10	10	5	\$(@FILEPATH:q \$(PDM_BIN:q) cmiserv) -C 250	<Work_Group>
gmisvr	0	1	1	10	10	5	\$(@FILEPATH:q \$(PDM_BIN:q) gmiserv) -C 250	<Work_Group>
GUI SVR	0	0	1	99	99	2	\$(OLAUNCHEXE:q) -f \$(@FILEPATH:q \$(PDM_BIN:q) cmiserv) -C 250	Global
lamserv	1	1	1	1	1	1000	\$(@FILEPATH:q \$(PDM_BIN:q) lamserv)	<Work_Group>

Confirm with OK.

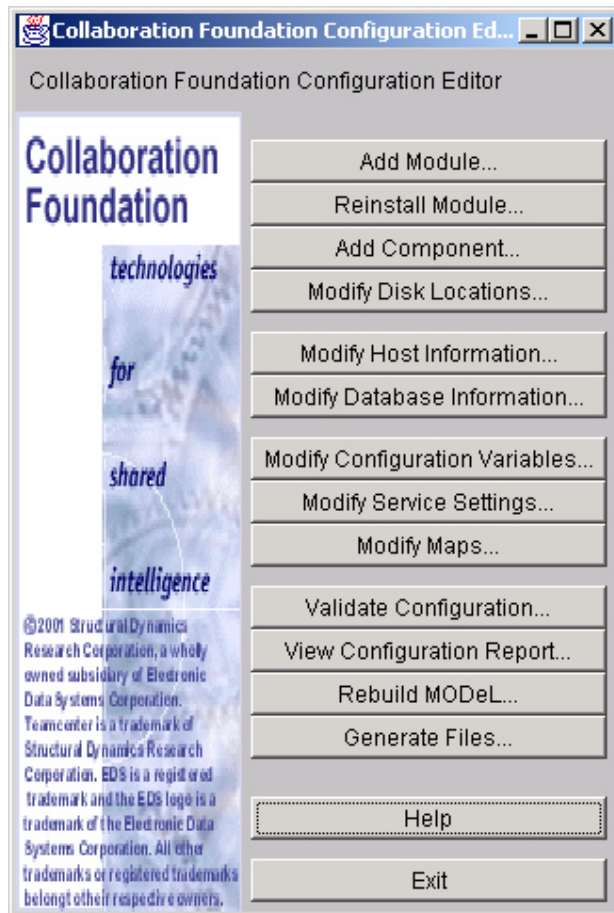


Click Modify Configuration Variables

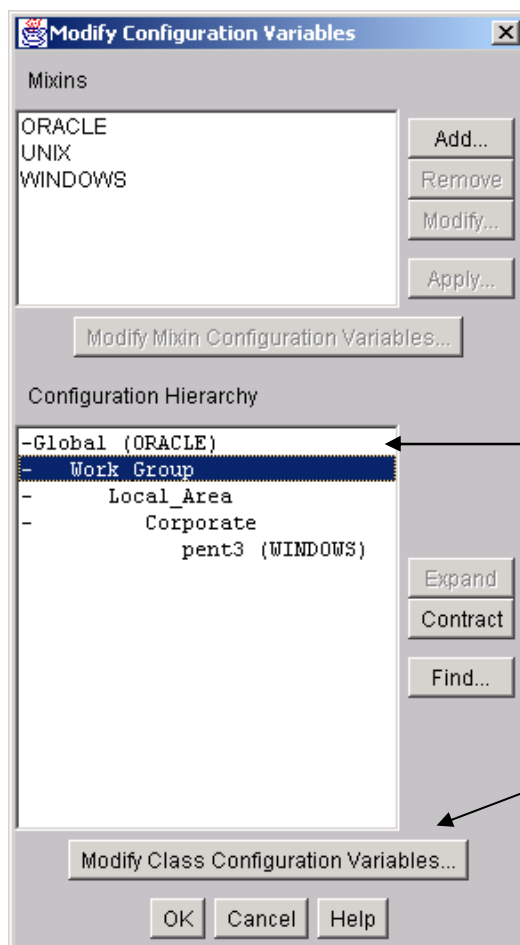


Select Work_Group

Click Modify Class Configuration Variables

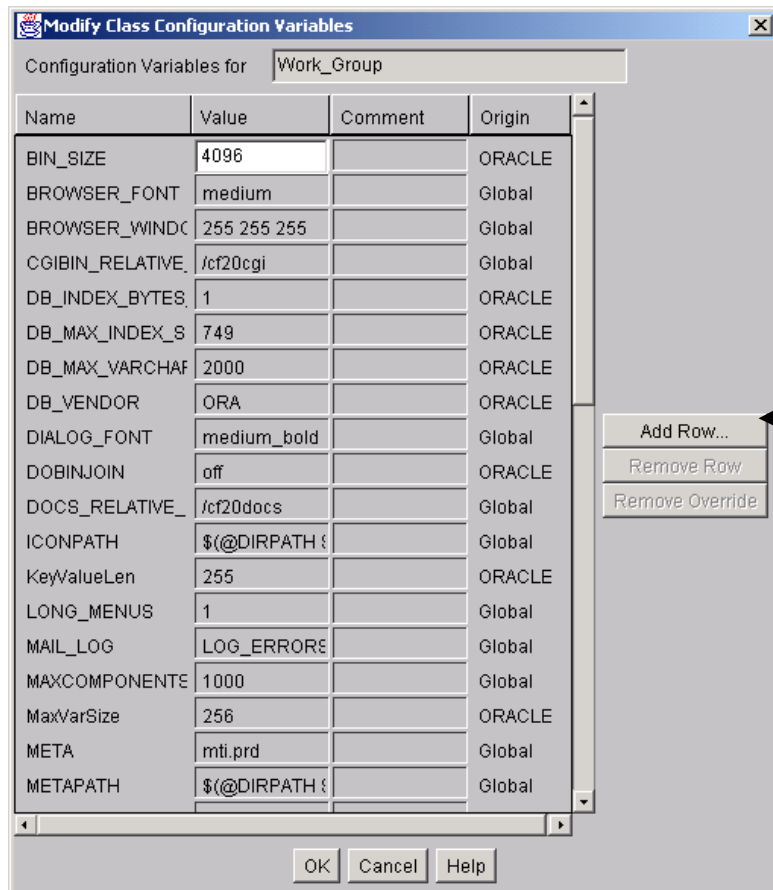


Click Add Row...


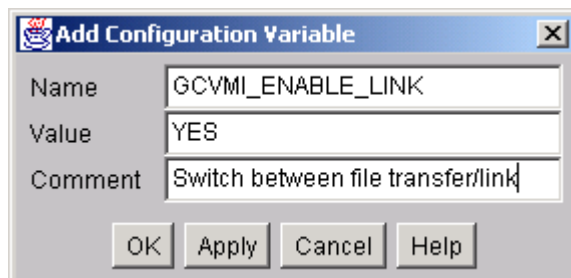


To enable symbolic links within GMI/CMI, set the flag **GCVMI_ENABLE_LINK** to "YES". This will improve the system performance, because Catia-model-files are no longer copied into the exchange-map, but referenced by links.

Confirm with "APPLY" and set the following options.

To enable the evaluation of neighbour-models, bounding boxes must be generated (Catia Installation) and you have to set the following config-variables:

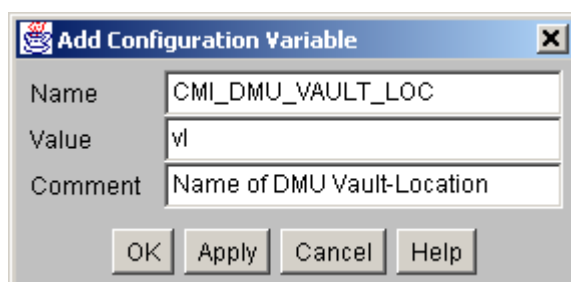

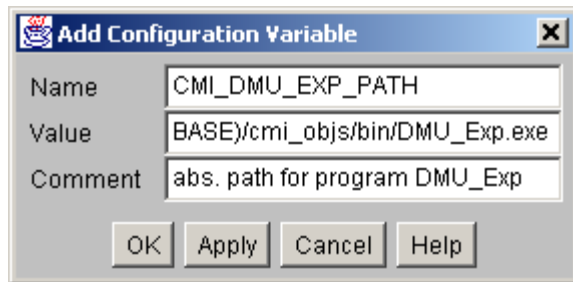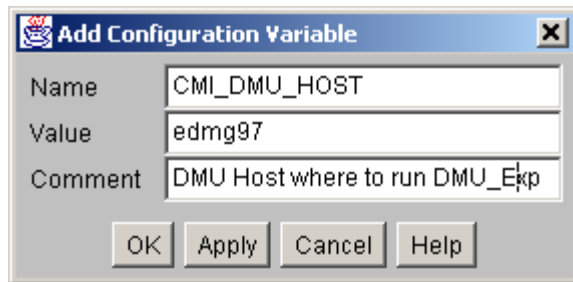

If you want, that the DMU_Exp-Utility runs with the Startup-Preferences of the super user, you have to set the Config-variable CMI_DMU_STARTUP_PREF to "ON".

In cases of trouble during the work with CMI you can get a trace from the GMI-/CMI-Servers. Just change the flag **GCVMI_SERVER_DEBUG** to "ON" to show information in the standard-output from each function/method called.



Setting "GCVMI_SERVER_DEBUG" to "ON" reduces the overall system performance. Therefore it should only be set for test/ debugging purposes. Set "GCVMI_SERVER_DEBUG" to "OFF" for productive usage of CMI.

To be able to view all available information in CMI Workbench items:

```
#set displayed lines in icon/ tree view to four
set ICONVW_ID_LINES "4";
set TREEVW_ID_LINES "4";
#Maximum Quantity for CMI-Assembly
set GCVMI_MAX_QUANTITY "10";
```

If you want to use the 4D-Navigator Integration you have to insert and set another variable:

```
set CMI_CATN4D_STARTUP "<path to 4Dnavigator >";
```

You can set the request time to CATIA with :

```
set XT0_NET_TIME "30";
```

CMI_CATN4D_STARTUP is the path to the 4D-Navigator startup command.

If you want to use the Delmia Integration you have to insert and set another variable:



```
#Set Envisionfilename for example "delmia_cmi.txt"
set ENVISIONFILENAME "<filename.txt>"
```

```
#Set Envisionexportfolder for example
set ENVISIONEXPORT "$HOME/envisionexport"
```

```
#Set Envisionimportfolder for example
set ENVISIONIMPORT "$HOME/envisionimport"
```

```
#Set the executeable file for Envision
set ENVISIONCALL "converttoxml.sh"
```

For mor information about CMI configuration variable settings please refer to the overview table on page 21.:

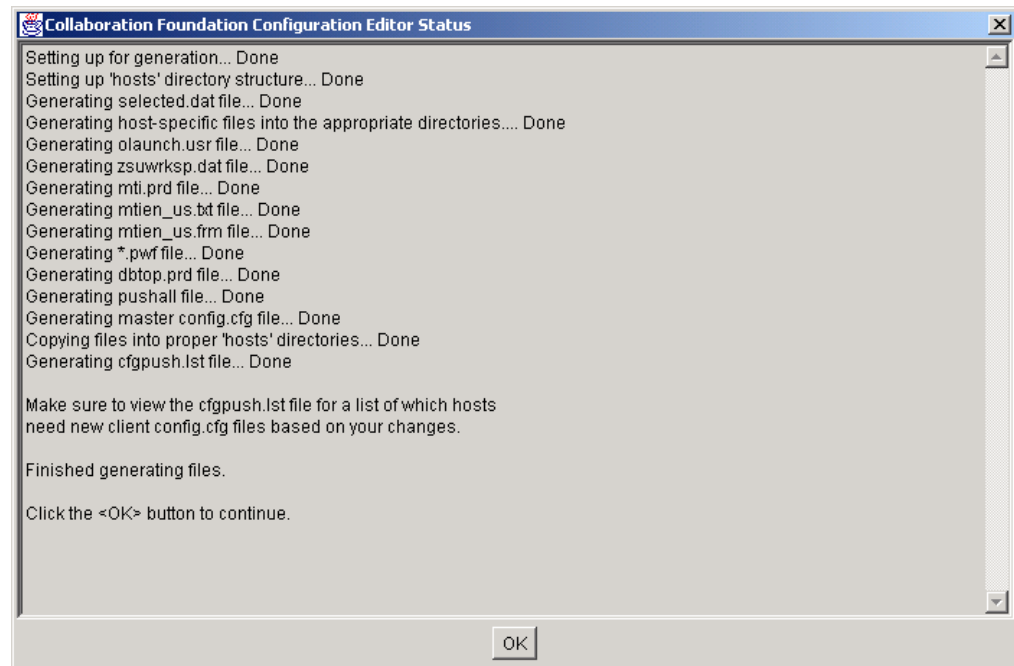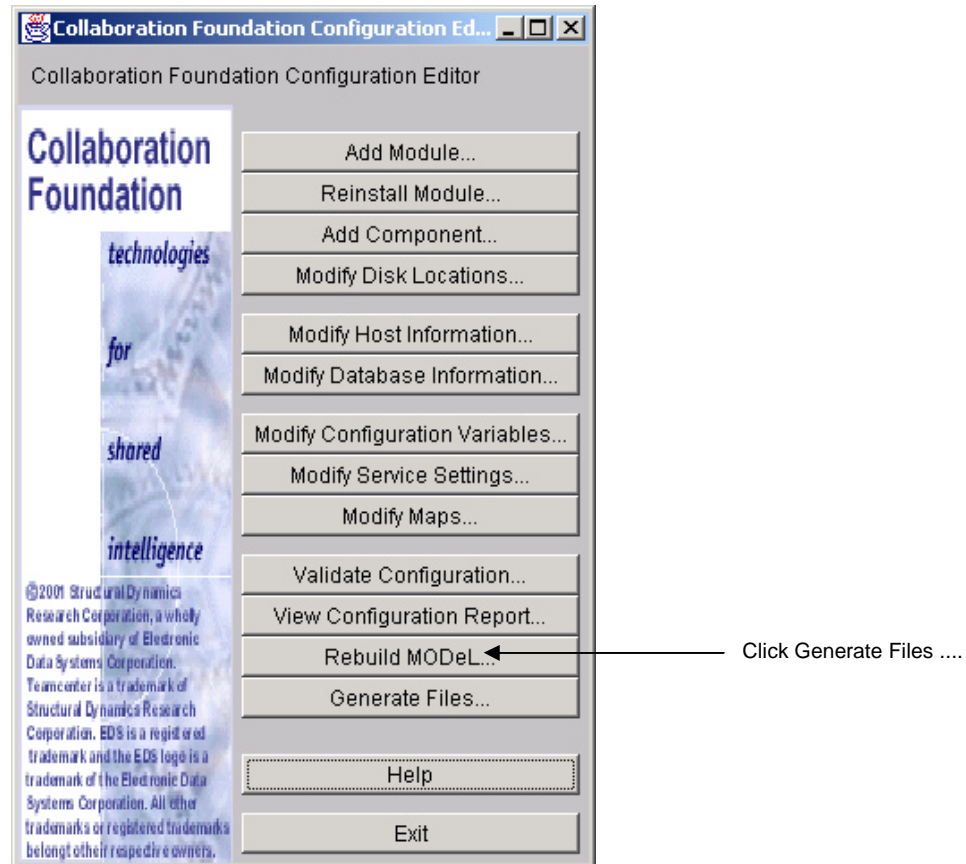

Confirm with OK.

Implementing of CATIA launching

It is possible to start CATIA just by double clicking on an appropriate icon within Teamcenter Enterprise :

Therefore you have to create a file (e.g. `tool.dat`) and load it into your database.

```
// Sample Tool.dat
delete from x0CTTool;

class x0CTTool
{
    Application = 'CATIA V4';
    Class = 'x0CTTool';
    Command = 'catstart.sh';
    ToolName = 'CATIA V4';
}
```

```
objload -f Tool.dat -k ToolKeys.dat
```

If there are keys to generate:

```
objload -f ToolKeys.dat
```

The attribute `Command` refers to your CATIA start script.

Installation of Rules

The CMI software will be delivered with some rules. After successful installation you should update your database. The file `dbinit/cmiadmdb.dat` contains a basic set of rules that can be used as templates for customer specific adaptations.

CMI Settings within PDM configuration file



For an overview of all possible configuration variable settings for CMI within the `PDM_CONFIG` file `config.cfg`, see *the CMI Customization Manual*


Upgrade of CMI

Download new CMI from <http://www.cmi-support.com/>.


Extract f.e. cmi910tc51ntos.tar.Z (CMI 9.1.0 for Windows) to C:\tmp

Start cfgedit2 in \$MTI_ROOT\install

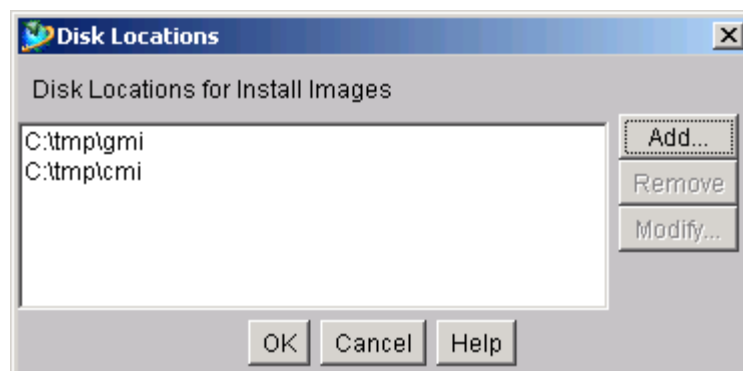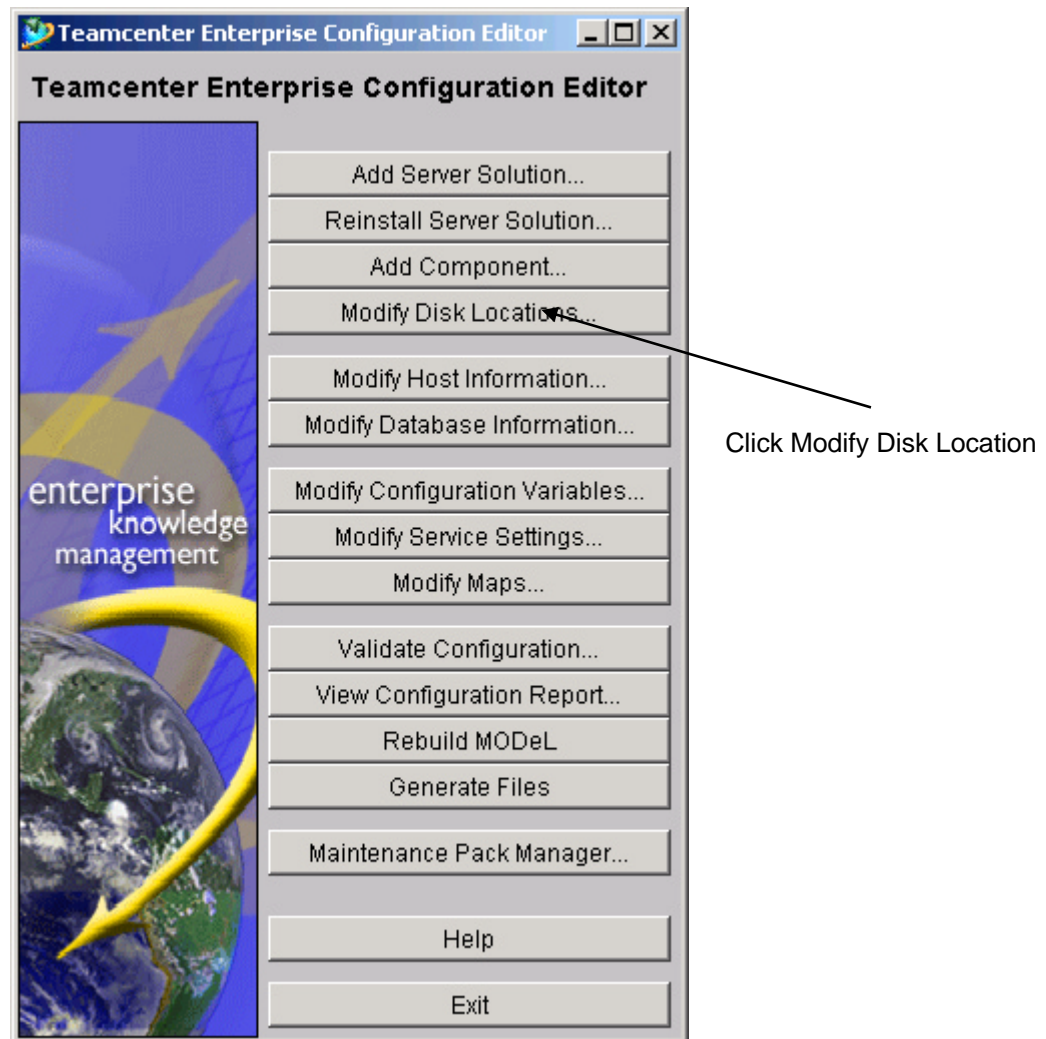


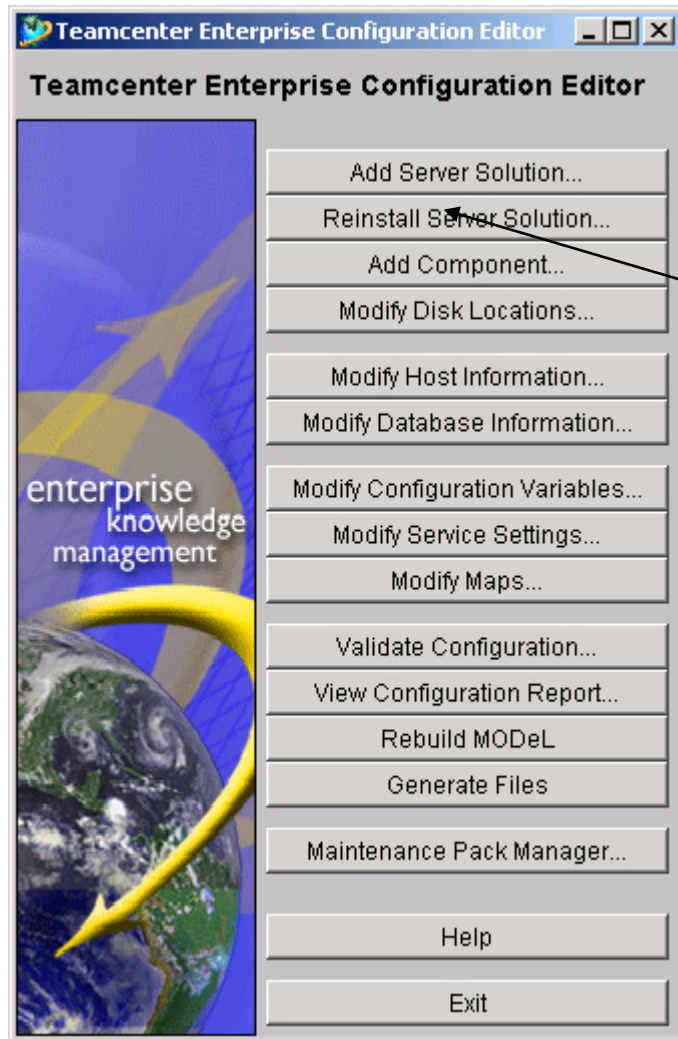

Click Reinstall Server Solution

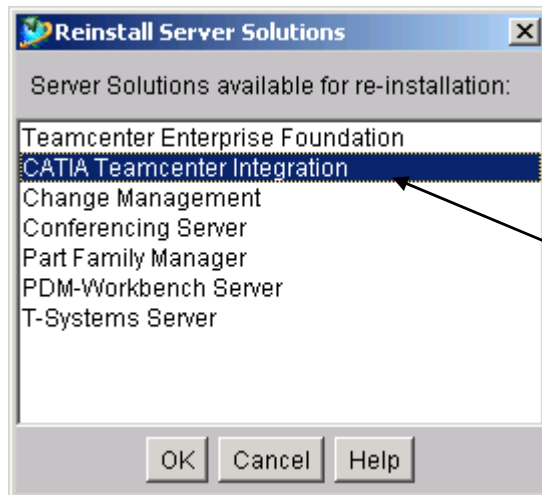

Select CATIA Teamcenter Integration

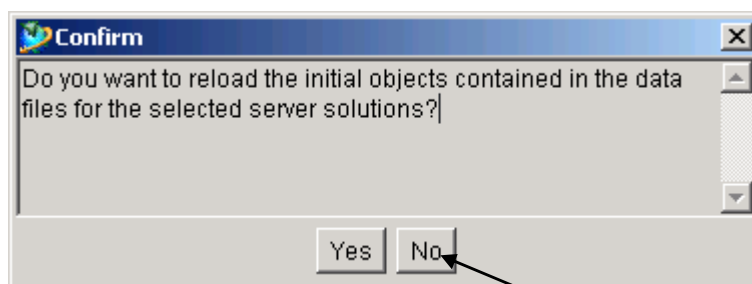

Click No

Finish Upgrade with OK

Upgrade of CMI-Rules

After Upgrade of CMI, CMI-rules should be upgraded too.

Start a Command-shell:

```
cd %MTI_ROOT%\config
pdmsetup.bat
muxstart
dspstart
cd ..\dbinit
objload -f cmiupdateadmdb.dat -k cmiupdateadmdb.key
objload -f cmiupdateadmdb.key
dspstop
muxstop
```

All rules of "CATIA User/Specialist Grp" are removed and the new CMI-rules are inserted from dbinit\cmiupdateadmdb.dat

CHAPTER 3

Install Listener

The listener is a program which helps to connect any application to Teamcenter Enterprise. In this special case we connect the application CATIA to Teamcenter Enterprise.

The listener is a Teamcenter Enterprise client and uses Teamcenter Enterprise API functions to call Teamcenter Enterprise methods. On the other hand the program is listening on an IPC port if a certain application has requests which should be sent to Teamcenter Enterprise.

After the starting the listener program reserves a free port and calls a Teamcenter Enterprise message to store connection information in Teamcenter Enterprise. At this moment the listener starts listening for a request via IPC. If a request from outside is received, the request is analyzed and the listener passes the information to Teamcenter Enterprise.

The CMI module looks for the executable file `cmilis` (`cmilis.exe`) in the operating system search `$PATH`. You may copy the file `cmilis` to your `/usr/bin` directory or to the installation directory of the omf.



The CMI listener `cmilis` must be installed in the `$PATH` on each CATIA client workstation.



CHAPTER 4

Adapting CATIA V4

The T-Systems International CATEDM (**C**ATIA **E**ngineering **D**ata **M**anagement system Integration) module extends the CATIA V4 functionality to handle assemblies and to communicate with PDM systems. The module is also used to integrate other PDM systems like Sherpa from Sherpa Inc. and CADIM from Eigner & Partner.

You should perform the following steps with your CATIA system administrator. The CATEDM module includes all of the supported platform data in a compressed file. Thus, you should choose an installation location for all CATIA V4 clients.

In the following example sections it is supposed that the software will be installed in directory `/catia/gii` and the name of the module will be **METAPHSE**. You can choose another destination and name for the module if you want (respective the restriction of 8 capitals).

Loading CATEDM Software from CD-ROM

Mount CD-ROM. See chapter “*Loading the Software from CD-ROM*” on page 1.

Log in as the CATIA administrator (i.e. `catadm`):

```
# su - catadm
```

Change to any temporary installation directory:

```
# cd /tmp
```

Unpack the compressed file:

```
# cat /cdrom/catedm/METAPHASE_x.x.x.tar.Z | uncompress -c | tar xvf -
```

This compressed file creates a new directory `METAPHASE_x.x.x` at the current temporary installation location.

CATEDM Installation

After you have successfully transferred the installation files to your installation host; the following steps configure your installation and install the software within your destination directory.

Configuring the installation

The `configure` file asks you for some installation paths and stores the information in a configuration file. This file will be used to install the software. To configure the installation:

Change to the installation directory:

```
# cd METAPHSE_x.x.x/install
```

Start configure

```
# ./configure
```

The configure command generates the file `config.env`. All the paths and installation flags should be stored there (you can check or modify the file).

Here you can decide about:

- the installation destination,
- the name of the module that appears in the CATIA V4 menu bar,
- the exchange map name for each user in his/her home location.

Sample configure output:

```
# ./configure
loading cache ./config.cache

The configuration procedure will try to find out installation pathes and
flags. This will not modify anything within your system.

In general we propose to install the complete software in a separate
directory. The directory should be readable by each user. You do not
need to have root privilidges.

What is your main installation path ? [/catia/metaphse_4.4.x] :

Which kind of help visualisation do you prefer? [XPDF | ACROBAT |
NETSCAPE] :
Pay attention: CMI context help is only available with XPDF!
XPDF
Where should binaries go ? [/catia/metaphse_4.4.x/bin] :

Where should the catia load modul go ? [/catia/metaphse_4.4.x/etc] :

Where should program data files go ? [/catia/metaphse_4.4.x/data] :

Where should doc files go ? [/catia/metaphse_4.4.x/doc] :

Where should example files go ? [/catia/metaphse_4.4.x/examples] :

Where should html- files go ? [/catia/metaphse_4.4.x/htdocs] :

Where should pdf- files go ? [/catia/metaphse_4.4.x/pdfdoc] :

The CATIA EDM Integration includes a CATIA Load Modul (CATIA EXTENSION).
Its name must be unique within your CATIA installation an can only use
8 characters. You may call it e.g. EDM, CATEDM, ...

What should be the name of the load modul ? [METAPHSE] :

CATIA and the EDM system have to exchange CATIA models. Therefore a user
specific directory is needed. You can specify the name of the subdir.
The HOME-Path of the user is always set as a prefix (e.g. if you specify
"maps/catiaexmap" the path "$HOME/maps/catiaexmap" is used ).

What should be the name of the subdir ? [catiaexmap] :

What is the path and name of your CATIA environment file?
[/catia422/v4r1/prod/START.env] :
```

```

It is recommended to use a CATIA swap model
Use a CATIA swap model Y|N ? [Y] :

It is recommended to use an empty startmodel
containing the standards of the actual project.
If there is no template defined, CMI CATIA generates an
empty model using ISO standards.

What template model for TMPAXIS.model should be used? :
/CATIA/TEMPLATE.model

Symbolic name of CATIA map of /CATIA/TEMPLATE.model :
TEMPL

Summary of configuration results
CATEDM_ROOT:          /catia/metaphse_4.4.x
CATEDM_ROOT_BIN:     /catia/metaphse_4.4.x/bin
CATEDM_ROOT_ETC:     /catia/metaphse_4.4.x/etc
CATEDM_ROOT_DAT:     /catia/metaphse_4.4.x/data
CATEDM_ROOT_DOC:     /catia/metaphse_4.4.x/doc
CATEDM_ROOT_EXAM:    /catia/metaphse_4.4.x/examples
CATEDM_ROOT_PDFDOC:  /catia/metaphse_4.4.x/pdfdoc
CATEDM_ROOT_HDOC:    /catia/metaphse_4.4.x/htdocs
preferred helper:    XPDF
CATEDM_LOADM:        METAPHSE
CATEDM_EXMAP:        $HOME/catiaexmap
CATEDM_CATIA_ENV:    /catia422/v4r1/prod/START.env

creating ./config.status
creating ./config.env

Configuration is finished, you may now check paths in ./config.env
This paths are used by the installation procedure.
You may run installation now by typing
> ./install_catedm

```

Installation

The script `install` will copy data to the places which you have defined before:

Start `install`:

```
# ./install_catedm
```

Here you can decide which architectures you want to install. The supported platforms are listed in chapter "System and Software Requirements" on page 1.

After confirming the list of installation decisions, the installation process will be started.

```

# install_catedm
for which architecture do you wish to make this installation?
type one of the following or enter for all:
AIX HP-UX IRIX SunOS :

dat-dir           : /catia/metaphse_4.4.x/data
doc-dir           : /catia/metaphse_4.4.x/doc
html-dir          : /catia/metaphse_4.4.x/htdocs
pdf-dir           : /catia/metaphse_4.4.x/pdfdoc
helper-app        : XPDF
examples-dir      : /catia/metaphse_4.4.x/examples

CATIA load module : METAPHSE

CATIA exchange map : $HOME/catiaexmap

CATIA environment  : /catia422/v4r1/prod/START.env

You can interrupt with cntr-C or continue with Return
creating directories ...
make dir /catia/metaphse_4.4.x
make dir /catia/metaphse_4.4.x/bin
make dir /catia/metaphse_4.4.x/etc
make dir /catia/metaphse_4.4.x/htdocs
.....
copying METAPHSE to /catia/metaphse_4.4.x/etc/AIX
copying XT0SHMOD to /catia/metaphse_4.4.x/etc/AIX
copying EDBPACK to /catia/metaphse_4.4.x/etc/AIX
copying OWNEDMOD module to /catia/metaphse_4.4.x/etc/AIX
copying EDMHELP module to /catia/metaphse_4.4.x/etc/AIX

copying binaries to /catia/metaphse_4.4.x/bin/AIX ...
appconnectx
netscape_request
xpdf
xt0request
copying examples to /catia/metaphse_4.4.x/examples ...
../examples/brake.model
../examples/brakedisc.model
../examples/caliper.model
....
copying html-files ...
....
A licman license manager is required to run CMI.
It is recommended to use a central licman installation.
It is not possible to run multiple instances of the
T-Systems license manager on a single client. If you
have already installed the T-Systems license manager it
is recommended to use the existing installation.

Do you wish to install the license manager now? y/n: [y] n

Please set debisLICDIR and debisLICBIN of your central licman
installation in the CMI configuration file ini.env.

Press Return to continue:

-----
FOR FURTHER INSTALLATION STEPS PLEASE READ THE
README_FIRST.txt and catstart.sh in
/catia/metaphse_4.4.x/doc
See also the WHATSNEW.txt file for new features and bugfixes.
-----

-----
Before starting CATIA you have to include the following
line into a global declartion File of your CATIA installation
or into your USRENV.dcls file:

INCLUDE ('/catia/metaphse_4.4.x/data/METAPHSE.include');
-----

```

If the installation is finished successfully, you may remove the temporary METAPHSE_x.x.x directory.

Please read the file `metaphse_x.x.x/doc/README_FIRST.txt` for detailed instructions how to adapt your CATIA V4 environment.

Modify and copy the file `metaphse_x.x.x/data/xt0request.sh` to any directory on the client workstation, which is in the operating system search path (i.e. `/usr/local/bin`).

☞ **The file `xt0request.sh` must be installed on each CATIA V4 client workstation.**

After a successful installation, the CATIA V4 environment must be modified.

A simple CATIA V4 start script and some modification tips are located in directory:

`metaphse_x.x.x/doc`

Directories

Following figure shows the standard directory tree of the CATEDM installation.

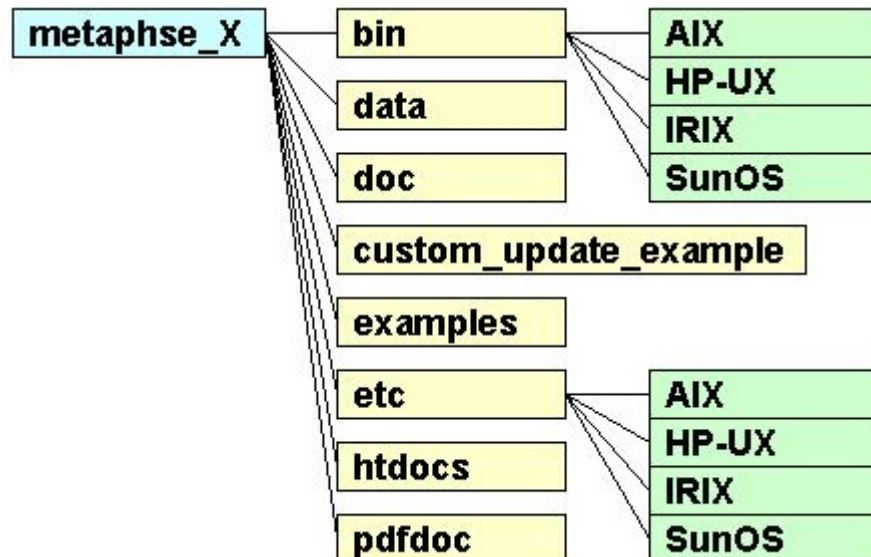


Figure 1: CATEDM installation path structure

- data/ :** Declaration include files, initialization scripts, error definition file, menu definition file, message definition file.
- etc/<your os>:** CMI CATIA V4 GII module in binary format (METAPHSE). All CATIA V4 user should have access privilege to this directory.
- bin/<your os>:** Some executables of the integration. All CATIA V4 user should have access privilege to this directory.
- doc/ :** The latest information about the product, script file "xt0request.sh" and a simple CATIA V4 start script "catstart.sh".
- examples/ :** Some example CATIA V4 models

<code>htdocs/</code>	:	Help files in HTML-Format (start page is index.htm).
<code>pdfdoc/</code>	:	Help file in the PDF-Format (XPDF uses this file to get the context sensitive help)

Files

The Following section describes some important files and their meaning.

`doc/README_FIRST.txt:`

This file contains some necessary tips for the CATIA V4 integration. You should read this file.

`doc/WHAT'SNEW.txt:`

This file contains the changes of the CATIA V4 module. There are new features, changes and bugfixes.

`doc/README.environment:`

This file contains the possible environment settings of the CATIA V4 module. The File `README.env.xls` is the same in the Microsoft Excel format.

`data/xt0request.sh:`

This file is needed for the communication between CATIA V4 client and Metaphase server. You should modify this file and copy it into any directory in search path of CATIA V4 clients.

`data/ini.env:`

This initialization script contains some necessary environment settings for the integration. The meaning of the certain environment variables is described in the `ini.env` file. This file should be adjusted and each user must run this script before starting CATIA V4. Please refer the `README.environment` file for more information.

`data/METAPHSE.include:`

CATIA V4 declaration file for the integration. This file should be included to the users `USRENV.dcls` or to any other local or global CATIA V4 declaration file.

`data/appdefault.obj:`

This file contains some environment settings of the CATIA V4 module. Please refer the `README.environment` file for more information.

`data/ERREDB:`

This file contains the error messages in CATIA V4.

`data/dshdrawingframe.sh:`

This file contains some information how to fill a drawing title block. The customizing of title block filling is described in "CATIA Teamcenter Interface Customizing Guide".

`data/cleanbox:`

All text inside the boxes described in this file will be deleted during filling the drawing frame.

`data/plotconf:`

This file contains the options of the CATIA V4 PLOT UTILITY.

data/catiaedb.msg :

This file contains a list of all used messages appearing in CATIA V4 when you are using the CMI Module. You can customize this message file to your own needs.

data/catiaedb.menu :

This file contains a list of all menu points of the CMI Module. You can change each menu point to your own needs. A menu name consists of 8 characters at maximum. An empty entry means that the menu point is disabled.

data/edmhelp.conf :

If xpdf is used as help tool, this file contains the bindings between the menu and the pages of the help file. If you write an own help file you must edit this file.

\$HOME/exchangemap :

This directory is a local UNIX directory in user's home directory. On each CATIA V4 client workstation an exchange map must exist. The task of this UNIX directory is to exchange data between CATIA V4 and Metaphase. Each user should have an own exchange map. For more information about customizing tasks please refer to „*CATIA Teamcenter Interface Customizing Guide*“.

\$HOME/.dshcatiarc.obj :

This optional script file overwrites the default settings for the user. Please refer the **README.environment** file for more information.

Modify CATIA V4 Environment

extend STEPLIB and CATDEC environment settings as following (example):

```
STEPLIB= ..... :/usr/lpp/catia/v4r1_code/gii/steplib
STEPLIB=$STEPLIB:/catia/gii/metaphse_x.x.x/etc/<your OS>
export STEPLIB
CATDEC=$CATDEC: /catia/gii/metaphse_x.x.x/data
export CATDEC
```

Include the file **data/METAPHSE.include** to each user's **USRENV.dcls** file as following (example):

```
/*-----*/
/* USRENV.dcls      DECLARATION FILE          */
/*-----*/
INCLUDE ('/catia/v4r1/prod/USRENV.include');

/*-----*/
/* INCLUDE all other Configuration - files    */
/*-----*/
INCLUDE ('/catia/gii/metaphse_x.x.x/data/METAPHSE.include');
/*-----*/
```

User dependent configurations

Normally you don't need any modifications for a certain user (except user's personal **USRENV.dcls** file). Therefore, each user can overwrite the default settings. You may copy the file **data/appdefault.obj** to the user's home directory and rename it to **.dshcatiarc.obj**. Now you can edit this file and overwrite the existing settings.

Following the order of running the setting files:

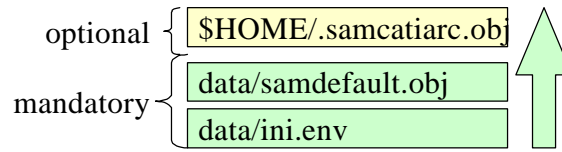


Figure 2: Initialization files with their order.

The following Environment settings are possible:

Name of Environment Variable (ini.env)	Name of Configuration Flag (appdefault.obj .dshcatiarc.obj)	Short Description	Possible Values
CATEDM_DEBUG	Debug	set a debug level	0 - no debug 66 - full debug
CATEDM_BINDIR	-	path to the executables of CATEDM installation	
CATEDM_SCRIPTDIR	-	path to the scripts and configuration files of CATEDM installation	
CATEDM_CONN	Connectmethod	method to connect with CMI workbench	
CATEDM_EXCHANGEMAP	Exchangemap	directory were CMI and CATIA V4 exchange model files	
CATEDM_EXMAPDLNAME	exchange_dlname	logical map name which is related to the exchange map	
CATEDM_MLINKS	Modellinks	create a symbolic link (description) to each model in exchange map	
CATEDM_TMPAXIS	Tmpaxis	use a start model	0 - no start model 1 - use a start model
CATEDM_TMPAXISDLNAME	tmpaxis-dlname	logical CATIA V4 map for the TEMPAXIS model	If there is no TEMPAXIS MODEL (MAP) defined the INITIAL_MODEL of CATIA V4 is used
CATEDM_TMPAXISDSNAME	tmpaxis-dsname	CATIA V4 map for the TEMPAXIS model	
CATEDM_TMPAXISNAME	tmpaxis-name	template for the TEMPAXIS model: the CATIA V4 model without ".model" extension	
CATEDM_NAMETYP	modelnametype	position from which a CATIA V4 model name is displayed in CATIA V4 status field. useful for names longer than 32 types.	
CATEDM_LOGF	Logfile	name of the file where the log should go.	
CATEDM_HELPERTOOL	Helper	name of the installed helper application (xpdf, netscape, acroread)	
CATEDM_HELPFILE	Alias	name of the online help file	
CATEDM_CATIERVER	Catiaversion	to set the current CATIA V4 version	
CATEDM_PROJECT	Project	defines the name of the current CATIA V4 project	
CATEDM_WPMODUS	wpmodus	default workplane modus	0 - assembly 1 - default workplane 2 - geometry 3 - multiselection
CATEDM_GEOPOS	geoposallowed	geometry position support	0 - off 1 - on
CATEDM_APPDEF	-	name of the CATEDM configuration file (default is appdefault.obj)	
CATEDM_RCFILE	-	path and name of the user specific configuration file	

		(default is \$HOME/.dshcatiaarc.obj)	
CATEDM_CONNECTXFILE	connectx-script	alternative way to connect to the workbench – not used yet	
CATEDM_NORMPART	normpart-support	support for norm part integration NIS	0 - off 1 – on
CATEDM_REFRESH	autorefresh	refresh the current CATIA V4 session after a CATEDM READ action	0 - off 1 – on
CATEDM_RM_MODELS	remove-models	remove models from exchange map at first CATEDM startup time	0 - off 1 – on
CATEDM_ASSEMBLY_SYMMETRY	assembly-symmetry	allow MOD POS->MOVE->SYMMETRY for assembly positions	0 - off 1 – on
CATEDM_LOADWARNING	load-warning	show a warning panel when a read action is started from workbench	0 - no warning 1 - at READ 2 - at REREAD 3 - at READ and REREAD
CATEDM_MERGE	merge-support	CATEDM supports CATIA V4 MERGE	0 - off 1 – on
debisLICDIR	-	location of debis licman license file	
debisLICBIN	-	location of debis licman executables	
CATEDM_LICMAN_START	license-startscript	license manager start script - default is licman12	Licman12
CATEDM_LLD_AUTOSTART	lld-autostart	start local license daemon at first CATEDM startup time	
CATEDM_SETUPSTAT	setupstatus	reads configuration flags from appdefault.obj at any module entry only used for debug	0 – off 1 – on
CATEDM_DMPF	stdumpfile	information file - only needed for VMI	
CATEDM_EDBHOST	edbapphost	CATIA V4 client host name	
CATEDM_SMD_WEIGHT	smd-weight-support	CATEDM supports to read the weight and the position of SMARAGD models	0 – off 1 – on
CATEDM_DESCINFOAPP	desc-info-applications	<p>read the user defined blocks and write the data to the info object. To access to the blocks you need three things:</p> <ol style="list-style-type: none"> 1. The application string: before any description, modification or read routine is used, the user must declare the application string 2. Element type 3. Types of the description: (1-16000) <p>This routine restricts the size of the data block to 32 elements of each type.</p>	application list
CATEDM_DESCINFOELE	desc-info-elements		pt, ln, ...
CATEDM_DESCINFODESC	desc-info-descriptions		types of the descriptions
	example:	<pre> CATEDM_DESCINFOAPP EDBCATIA CATIAEDB CATEDM_DESCINFOELE PT LN TXTN CATEDM_DESCINFODESC {12345 2456} 3457 {1111} "==> PT: search for application string EDBCATIA and CATIAEDB and types 12345 and 2456 </pre>	
CATEDM_COMMENT	comment-support	read the comment lines of a model file and write them into a file into the exchangemap directory. The full filename stands into the info obj	0 – off 1 – on
CATEDM_NEWUPD	Newupd	Selection of the models to save in CATIA V4	1 - in CATIA V4 (default) 0 -no selection of the models in CATIA V4

CATEDM_REPLACEMODEL	replace-model	Save As / Create can replace the original CATIA V4 model in the current SESSION by the new registered Metaphase CATIA V4 model. (This is only possible if the model was loaded by CATIA FILE->open) If the replace functionality is turned off: The new model is loaded additional into the CATIA SESSION	1 - replace (default) 0 - do not replace
CATEDM_CUSUPD	cmi-custom-update	calls the shared lib libcmi_custom_update.<a,sl,so> The customer can use its own libs to perform some CATIA action at update / create	1 - use the shared lib 0 - do not use the shared lib
CATEDM_BBOX	bbox-support	bounding box generation for CATIA models (2 points for each model: D3D_{X,Y,Z}{1,2}) bounding box points will be sent for each model at UPDATE ALL/MODELS, CREATE/SAVE AS and MULT CRE.	0 - no bbox support at all 1 - standard bbox support (without checkbox at update and muticreate) 2 - bbox support with checkbox (default support off) 3 - bbox support with checkbox (default support on)
CATEDM_BBOXLAYER	bbox-layer-list	Only the elements of these layers are used to generate the bounding box. If no layer is set the current layer is used.	0 1 2 ... 254 - creates a bounding box using these layers -1 - uses the actual layer filter -2 - creates the box using all layers
CATEDM_USE_LICMAN12	Use_licman12	Use licman12 (default). You can set up licman20 (optional)	1 - licman12 2 - licman20

This is a short documentation of the configuration environment of CUSTOM ATTRIBUTES

ATTRIBUTE	VALUE	DESCRIPTION
VolumeMass	<p align="center">Type: REAL</p> <p>CATIA V4 uses the units of the specific model</p>	<p>1. Sets the model standards</p> <p>2. Calculates the weight and the Center of Gravity (COG) of the Volume (VOL) and the Polyhedral and exact solid (SOL)</p> <p>The results are written into the info object:</p> <p align="center">{SOLWEIGHT} value</p> <p>{SOLCOG} {x-value} {y-value} {z-value}</p> <p align="center">{VOLWEIGHT} value</p> <p>{VOLCOG} {x-value} {y-value} {z-value}</p>
SurfaceMass	<p align="center">Type: REAL</p> <p>CATIA V4 uses the units of the specific model</p>	<p>1. Sets the model standards</p> <p>2. Calculates the weight and the Center of Gravity (COG) of the Surface (SUR), the Face (FAC), the Skin (SKI) and the SPACE polyhedral surface (POL)</p> <p>The results are written into the info object:</p> <p align="center">{SURWEIGHT} value</p> <p>{SURCOG} {x-value} {y-value} {z-value}</p> <p align="center">{FACWEIGHT} value</p> <p>{FACCOG} {x-value} {y-value} {z-value}</p> <p align="center">{SKIWEIGHT} value</p> <p>{SKICOG} {x-value} {y-value} {z-value}</p> <p align="center">{POLWEIGHT} value</p> <p>{POLCOG} {x-value} {y-value} {z-value}</p>



CHAPTER 5

Adapting CATIA V5

The CMICATV5 (**CMI-CATIA V5** Integration) module provided by T-Systems International GmbH extends the CATIA V5 functionality to communicate with the Metaphase / Teamcenter Enterprise PDM system.

OMF and CATIA V5 have to be started in the same environment.

You should perform the following steps with your CATIA system administrator. The CMICATV5 module includes all of the supported platform data in a compressed file. Thus, you should choose an installation location for all CATIA V5 clients.

In the following example sections it is supposed that the software will be installed in directory `/catia/cmecatv5` on UNIX and `c:\catia\cmecatv5` on Windows 2000. You can choose another destination for the module if you want.

Loading CMICATV5 Software from CD-ROM

Mount CD-ROM. See chapter “*Loading the Software from CD-ROM*” on page 1.

UNIX

Change to any temporary installation directory:

```
catusr~> cd /home/catusr
```

Unpack the compressed file:

```
catusr~> cat /cdrom/CMICATV5_[Rxx]_V[xxx].tar.Z | uncompress -c | tar xvf -
```



Caution: the tar utility included with Solaris may truncate filenames. We recommend to use GNU tar.

Windows 2000

Use the Windows Explorer to locate the `d:\cmecatv5\CMICATV5_[Rxx]_V[xxx].tar.Z` file on the CD. Extract the content of the archive file to a temporary installation location.



Caution: WinZip™ versions before 8.0 do not support the tar file correctly. We recommend to use WinZip™ 8.1 or above.

CMICATV5 Installation

After you have successfully transferred the installation files to your installation host; the following steps will install the files and configure your installation.

Configuring the installation

The `CMICATV5_[Rxx]_V[xxx]` Installation Directory has the following structure:

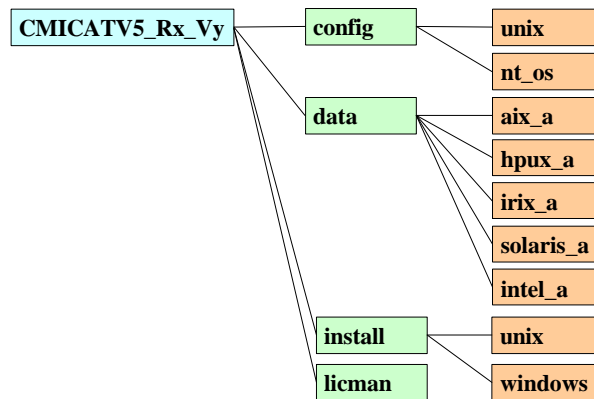


Figure 3: Directory structure of the CMICATV5 installation files

The **config** directory contains the file **cmiEnv.txt**. During the installation (UNIX) the file is merged with the actual CATIA V5 environment.

The **config** directory also contains sample CATIA V5 Configuration files for UNIX and Windows 2000/XP. The **unix** configuration contains two sample environment settings for the shells **sh** and **csh**. The **nt_os** configuration contains a sample CATIA V5 Environment file for the CATIA V5 Environment editor.

The data directory contains the binary distributions for the CMICATV5 module for the supported operating system mnemonics.

The supported operation systems and their mnemonics are:

AIX4.3/5.1	aix_a
HPUX 11	hpux_a
IRIX 6.5	irix_a
Solaris 2.7/8	solaris_a
Windows 2000/XP	Intel_a

UNIX



You do not need root access to install the CMI CATIA V5 module.

The licman license manager must be installed on the CATIA V5 client host. If the CMI CATIA V4 module is installed on this host the licman is already installed.

Start the installation script and follow the instructions. Your installation setting will be stored in the file config.env. This file will be located in the same directory as the install.sh script.

```
catusr~> CMICATV5_[Rxx]_V[xxx]/install/unix/install.sh

*****
*
*           CMI CATIA V5 INSTALLATION           *
*
*           The installation performs two steps  *
*
*           1. Step:      Configuration          *
*
*           2. Step:      Installation           *
*
*****

You can interrupt with cntr-C or continue with Return
*****
*
* Installing CMI CATIA V5
*
* 1. Step:      Configuration
*
*****

To continue the installation of CMI CATIA V5 an
installation of the T-Systems license manager
licman12 (default) or licman20 is required.

Note: It is not possible to use multiple licman
installations on a single machine at the same time.

Which license manager have you currently installed?

    0) none
    1) licman12
    2) licman20

Choose your licman installation [0] 1

Please enter the full path / name of the licman12
start script. [<path>/licman12]:
/opt/licman12/bin/licman12

Please enter the directory where the licenses
files are installed ($debisLICDIR)
[<path>]:
/opt/licman12/data

In which directory would you like to install
the CMI CATIA V5 package?
Type the full path or hit return to accept the default.
[/home/catusr/cmocatv5_r[xx]_v[xxx]]

Installation directory of standard CATIA.
Type the full path or hit return to accept the default.
[/usr/DassaultSystemes/B[xx]]

Environment file of standard CATIA
Type the full path or hit return to accept the default.
[/CATEnv/CATIA.V5R[xx].B[xx].txt]

Get the Metaphase / Teamcenter Environment ($MTI_ROOT/pdmsetup)
[<full_path_to>/pdmsetup]
```

```

/opt/TeamCenter/config/pdmsetup

The CMI CATIA V5 package
needs a local directory to perform the file exchange
between Metaphase / Teamcenter and CATIA. This directory is
located in the $HOME directory of each user, e.g. if you
want to use $HOME/xmap then type xmap. Make sure this
directory exists for every user.
[xmap]

*****
* CMI CATIA V5 package Installation
*
* 2. Step:      Installation
*
*****
* If you are not sure if all settings are correct
* (see below) this is your last chance to interrupt
* the installation and make corrections in config.env:
*
*****
* Installation dir      : /home/catusr/cmecatv5_r[xx]_v[xxx]
* CMI exchange map     : $HOME/xmap
* CATIA V5 environment : /CATEnv/CATIA.V5R[xx].B[xx].txt
* Metaphase environment : /opt/TeamCenter/config/pdmsetup
*
*****

You can interrupt with cntr-C or continue with Return

For which architecture do you wish to make this installation?
type one of the following or enter for all:
  aix_a hpux_b irix_a solaris_a :

install for all architectures!
/home/catusr/cmecatv5_r[xx]_v[xxx] created
/home/catusr/cmecatv5_r[xx]_v[xxx]/config created

installing aix_a
aix_a/
aix_a/code/
aix_a/code/productIC/
aix_a/code/productIC/CMIFrameworkIC.script
aix_a/code/lib/
aix_a/code/lib/CMIAddin.exp
aix_a/code/lib/CMIBackbone.exp

< installing many files >

Generating new environment files

. . . . .
. . . . .
. . . . .
. . . . .

*****
*
*      CMI CATIA V5 Installation finished
*
*****
*
* CMI CATIA V5 package License:
* To get a trial license please fill the form at:
* http://www.cmi-support.com/trial_license.html
*

```

```

* Copy the licenses (clients) file to
* /home/catusr/cmocatv5_r[xx]_v[xxx]/licman/data
*
* You can start CATIA V5 with the script
* cmocatstart.sh or cmocatstart.csh
* in the installation directory
* /home/catusr/cmocatv5_r[xx]_v[xxx]
* (Make sure the script uses the correct
* Metaphase / Teamcenter environment)
*
* For more information refer to the file
* /home/catusr/cmocatv5_r[xx]_v[xxx]/README
*
*****

```

The installation procedure creates two scripts to launch CATIA V5 with CMI. One can be used if you use a C-shell the other if you use a K-shell in your pdmsetup.

The start scripts use the new generated CATIA V5 environment file "cmocatiaenv.txt". This environment includes the old CATIA V5 environment and the CMI settings.

If you already have an existing licman installation you have to change the licman configuration in the start script.



It is not possible to have more than one licman installation on one host.

The start script for the C-shell looks like this:

```

#!/usr/bin/csh -f
#####
#
#
# Example start script to start CATIA V5 with a CMI product
#
#
#####
# source METAPHASE / TEAMCENTER environment

source /opt/TeamCenter/config/pdmsetup

# directory of the CMI CATIA V5 installation
setenv CMI_INSTDIR /disks/edmg/home/catusr1/cmocatv5_r17_91v00

# directory of the CATIA V5 installation
setenv CMI_CATINSTDIR /usr/DassaultSystemes/B17

# name of the CATIA environment
setenv CMI_CATENVNAME cmocatiaenv.txt

# CATIA architecture
setenv CMI_OS ` $CMI_CATINSTDIR/GetOSDS `

# license directory (only needed for licman12)
setenv debisLICDIR /opt/licman12/data

# license location (only needed for licman20)
setenv LICMAN_LICENSE_PATH_LLD <path>/license.dat | <port>@<host>

# launch licman
"/opt/licman12/bin/licman12" lld

# custom specific environment
# start

```

```

setenv CMI_USELICMAN12 ON
setenv CMIXMAP $HOME/xmap

# custom specific environment
# end

# launch CATIA V5
setenv CMD "$CMI_CATINSTDIR/$CMI_OS/code/command/catstart"
$CMD -env $CMI_CATENVNAME -direnv $CMI_INSDIR/config

```

The README shows additional information about the installation / configuration of the CATIA V5 part of CMI

```

*****
*
*      CMI CATIA V5 package README
*
*****

1. Contact
2. Licensing
3. Adapting CMI CATIA V5
4. Adaptig Metaphase / Teamcenter

1. Contact

T-Systems Enterprise Services GmbH
Solution Center PLM

Fasanenweg 5
70771 Leinfelden-Echterdingen
Germany
http://www.cmi-support.com
cmi_support@t-systems.com

2. Licensing

1 License:
To get a trial license please fill the form at:
http://www.cmi-support.com/trial_license.html
Copy the licenses (clients) file to
/home/catusr/cmocatv5_r[xx]_v[xxx]/licman/data
For more information refer to:
/home/catusr/cmocatv5_r[xx]_v[xxx]/licman/doc/licman12.pdf

3. Adapting CMI CATIA V5

You can start CATIA V5 with one of the following scripts:

/home/catusr/cmocatv5_r[xx]_v[xxx]/cmicatstart.sh
(use this start script if you work with a k-shell: sh / ksh / bash)

/home/catusr/cmocatv5_r[xx]_v[xxx]/cmicatstart.csh
(use this start script if you work with a c-shell: csh / tcsh)

The start scripts use the file cmicatiaenv.txt to get the
CATIA V5 environment.

Make sure the scripts use the correct Metaphase / Teamcenter
Environment.

Environment files (all containing the same environment):

/home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmicatiaenv.txt
/home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmicatiaenv.ksh

```

```
/home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.csh
```

To start CATIA V5 without the start script use:

```
( sh / ksh / bash )
```

```
# source Metaphase / Teamcenter environment
. $MTI_ROOT/pdmsetup.sh
# source CATIA V5 environment
. /home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.ksh
```

```
# set licman environment and start licman
debisLICDIR=/home/catusr/cmocatv5_r[xx]_v[xxx]/licman/data
export debisLICDIR
debisLICBIN=/home/catusr/cmocatv5_r[xx]_v[xxx]/licman/bin/$OSDS
export debisLICBIN
/home/catusr/cmocatv5_r[xx]_v[xxx]/licman/licman12 lld
```

```
# start CATIA
CNEXT
```

```
( csh / tcsh )
```

```
# source Metaphase / Teamcenter environment
source $MTI_ROOT/pdmsetup.csh
# source CATIA V5 environment
source /home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.csh
```

```
# set licman environment and start licman
setenv debisLICDIR /home/catusr/cmocatv5_r[xx]_v[xxx]/licman/data
setenv debisLICBIN /home/catusr/cmocatv5_r[xx]_v[xxx]/licman/bin/$OSDS
/home/catusr/cmocatv5_r[xx]_v[xxx]/licman/licman12 lld
```

```
# start CATIA
CNEXT
```

Change of the CMI CATIA environment:

If you change the CMI CATIA environment please provide the changes to the 3 environment files the same way.

```
/home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.txt
/home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.ksh
/home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.csh
```

Variable	Value	Description
CMIXMAP		exchange directory between Metaphase/ Teamcenter and CATIA V5
CMI_CALC_BBOX	ON	calculate bounding boxes
CMI_DEBUG	ON	generate debug output of the CMI CATIA module.

4. Adapting Metaphase / Teamcenter

Add one of the following lines to your pdmsetup on the client:

```
. /home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.ksh
source /home/catusr/cmocatv5_r[xx]_v[xxx]/config/cmocatiaenv.csh
```

Alternatively you can apply the following settings in the PDM setup:

```
CATDefaultEnvironment=$CMI_V5DIR/config/cmocatiaenv
PATH=$CMI_V5DIR/<platform>/code/bin:$PATH
PATH=<catiaV5installdir>/<platform>/code/bin:$PATH
```

Windows XP

Use the Windows Explorer to run the **setup.exe** in the directory `CMICATV5_R[xx]_V[xxx]\installwindows` of the installation package.

The setup will **NOT** modify the native installation of CATIA V5 and Teamcenter.

The setup asks for the following input:

Product Selection:

You can select one of the following packages:

Note: every package needs a different license

- a) CMI
- b) e!CMI
- c) s!CMI
- d) CMI + Import Tool
- e) CMI + Import Tool + e!CMI (only useful for evaluation)

Installation directory

Target directory of the CMI CATIA V5 module

CMI Exchange directory:

CMI needs a temporary directory to perform the file transfer between CATIA and Teamcenter. Make sure this directory exists for every CMI user.

Teamcenter Enterprise Environment:

Selection of the Teamcenter environment
(only package a, d, e)

Select the `pdmsetup.bat` of the teamcenter client installation

Adapting Metaphase / Teamcenter Enterprise

Add the following lines to your `pdmsetup` on the client:

```
call <Installation directory>\cmicatv5_r[xx]_v[xxx]/config\cmicatiaenv.bat
```

Alternatively you can apply the following settings in the PDM setup:

```
set CATDefaultEnvironment=<Installation directory>\config\cmicatiaen
```

```
set PATH=<Installation directory>\<platform>\code\bin:%PATH%
```

```
set PATH=<catiaV5installdir>\<platform>\code\bin:%PATH%
```

For the Installation of the license manager please refer to the *Licman 1.2 Installation Manual*.

The licman license manager has to be installed on the CATIA V5 client host, please refer to section

Remarks

By default CMI uses licman12. But you can also use licman20.

For the installation of licman12 or licman20 please refer to the licman documentation.

on page 45.

User dependent configurations

For an overview of all possible environment settings for the CMI Catia V5 client, see the CMI Customization Manual

Testing the installation

Common prerequisites

The CATIA V5 must be started in the OMF – Metaphase environment and the omfcl executable (Metaphase) must be present in the executable search path.

The **CMIXMAP** (CMI exchange map) environment variable must point to a directory with write permissions.

Windows 2000

Use: Start Programs->T-Systems->CMICATV5_RXX_VXX->CMI_START to launch CATIA V5

CATIA V5

After the CATIA V5 has started the following message should appear in the command window:

```
"@(#)#####"  
"@(#)# CMI CATIAV5 Module #"  
"@(#)# Version: 3.0 #"  
"@(#)# CATIAV5R10 #"  
"@(#)# (c) T-Systems 2002 #"  
"@(#)#####"
```

CMI: Module Number 1011 : license successful allocated

The License Module Number may vary.



The CMI Toolbar should be present. Availability of the individual commands depends on the active workshop.

In the CATIA Settings the following options must be set as described below:

The *Load Referenced documents* option must be set in **Tools->Options-> General** settings (see Figure 4).

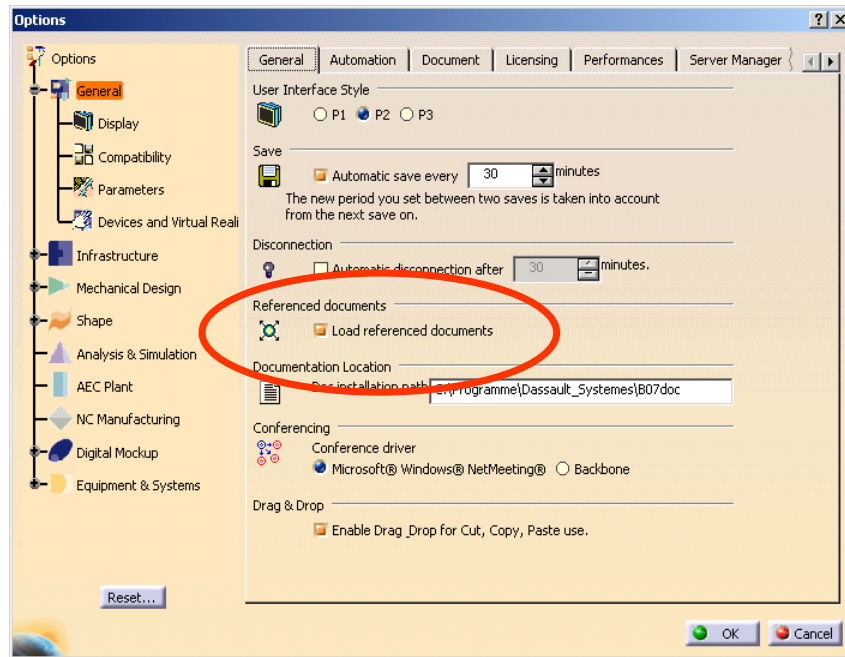


Figure 4: CATIA V5 General->General Settings

In the Linked Document localization the Options **Folder of the pointing document** and **Folder of the link** must be set to yes, and should be in this order. (see Figure 5).

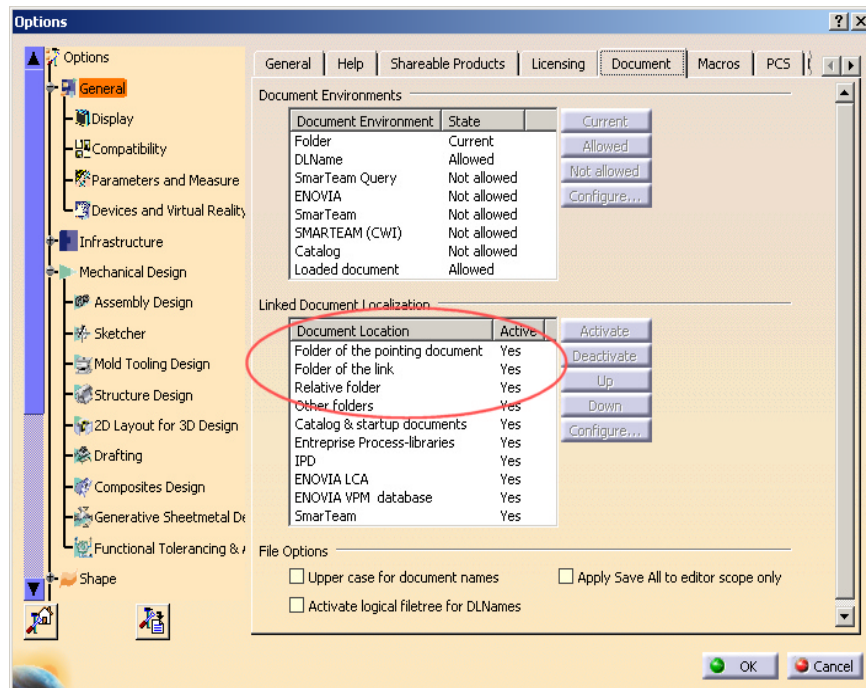


Figure 5: CATIA V5 General->Document Settings

For CMI functionality please refer to the *CATIA Metaphase Interface User's Manual*.

Chapter 6

CMI License manager installation

Remarks

By default CMI uses licman12. But you can also use licman20.
For the installation of licman12 or licman20 please refer to the licman documentation.