



TCI Release 3.8 Installation Manual

Copyright

© 2012, 2022 T-Systems International GmbH.
All rights reserved. Printed in Germany

Issued by

T-Systems International GmbH
Business Unit Product Lifecycle Management
Fasanenweg 5
70771 Leinfelden-Echterdingen
Germany

Contacts

web: <http://www.cmi-support.com>
email: cmi_support@t-systems.com
phone: +49 (0) 40 30600-5544

Brief details

Installation manual for TCI.

This guide describes the installation and configuration of TCI.

Before using this guide, be sure you understand:

- the administration of 3DEXPERIENCE,
 - the administration of Teamcenter.
-

Trademarks

3DEXPERIENCE is a registered trademark of Dassault Systèmes.

Teamcenter is a registered trademark of Siemens Digital Industries Software.

Oracle is a registered trademark of Oracle Corporation.

Names of other products mentioned in this manual are used only for identification purpose and may be trademarks of their companies.

Table of Contents

1	Overview.....	1
1.1	System and Software Requirements.....	1
1.1.1	Required 3DEXPERIENCE roles.....	1
1.1.2	Software Requirements for Oracle Database	2
1.2	Shipment.....	2
2	Infrastructure Overview.....	3
2.1	Overview.....	3
2.2	Infrastructure Remarks	4
3	Installing TCI.....	5
3.1	Prerequisites	5
3.1.1	Enable secure communication via https.....	5
3.1.2	Teamcenter.....	5
3.1.3	3DEXPERIENCE.....	5
3.2	TCI setup	6
3.2.1	Setup TCI as web application.....	6
3.2.2	Setup XCI_FC as web application	8
3.2.3	Setup XCI_CS as web application.....	9
3.3	TCI configuration.....	10
3.3.1	Logging configuration	10
3.3.2	General TCI configuration	10
3.3.3	3DEXPERIENCE Environment File	56
3.3.4	3DEXPERIENCE Custom Configuration.....	56
4	Installing the TCI Teamcenter Rich Client Plugin.....	57
4.1	Installation.....	57
4.2	Silent Installation	62
4.2.1	Parameters	62
4.2.2	Usage	63
4.3	Environment variables	63
5	Installing the TCI Teamcenter Active Workspace Enhancement	65
5.1	Installation.....	65
6	Installing the TCI 3DEXPERIENCE Rich Client Extension.....	66
6.1	Installation.....	66
6.2	Silent Installation	66
6.2.1	Parameters	66
6.2.2	Usage	67
6.3	Environment variables	68
6.4	Client extensions configuration.....	69
7	Installing the XCI 3DEXPERIENCE Batch.....	70
7.1	Installation.....	70
7.2	Additional Configuration for Post Processing for xPDM.....	70
7.2.1	Copy required library from the 3DEXPERIENCE environment	70
7.2.2	Configuration of the TSI 3DEXPERIENCE xPDM Post Process behavior.....	71
7.2.3	Create an encrypted password for the TSI 3DEXPERIENCE xPDM Post Process	72
7.2.4	Test the TSI 3DEXPERIENCE xPDM Post Process environment	72

8	Installing the license manager	74
8.1	Remarks	74
8.2	Running Licman as a regular executable on Windows.....	74
9	Installing the COMReconV5 package	75
9.1	Installation.....	75
9.1.1	Unzip the COMReconV5 package.....	75
9.1.2	Create CATIA V5 environment file.....	75
9.1.3	Configuration.....	75
9.1.4	Install Microsoft Visual C++ Redistributable Packages	76

List of Figures

Figure 1: TCI Infrastructure Overview.....	3
Figure 2: Setup – Start page.....	57
Figure 3: Setup – License Agreement page.....	58
Figure 4: Setup – Choose Users page.....	58
Figure 5: Setup – Choose Install Location page.....	59
Figure 6: Setup – Choose Teamcenter Directory page.....	59
Figure 7: Setup – Choose Rich Client start file page	60
Figure.8: Setup – TCI settings page	60
Figure.9: Setup – Subsumption page	61
Figure 10: Setup – Installation Complete page.....	61
Figure 11: Setup – Finished page	62
Figure 12: COMReconV5 package content.....	75

List of Tables

Table 1: Teamcenter settings.....	5
Table 2: TCI web application environment variables	8
Table 3: XCI_FC web application environment variables	9
Table 4: XCI_CS web application environment variables.....	9
Table 5: Silent installation parameters for TCI Teamcenter Rich Client Plugin.....	62
Table 6: TCI Teamcenter Rich Client Plugin - environment variables	64
Table 7: Silent installation parameters for 3EXPERIENCE Rich Client Extension	67
Table 8: TCI 3DEXPERIENCE Rich Client Extension environment variables	68

1 Overview

1.1 System and Software Requirements

TCI Installation on the following minimum operation systems and software prerequisites:

- Windows Server 2012 R2
- Java runtime environment 8 for Windows x64,
Java runtime environment 11 for Teamcenter 14
- Apache Tomcat 8.5.50

For the file cache, at least 500GB of disk space are recommended.

For each 3DEXPERIENCE batch server, please consult the Dassault Systemes recommendations:

http://media.3ds.com/support/certified_hardware/Windows_10_64-bit.html

The following remote systems are supported:

- 3DEXPERIENCE R2019x
- 3DEXPERIENCE R2020x
- 3DEXPERIENCE R2021x
- 3DEXPERIENCE R2022x
- Teamcenter 11.2.0 (4-tier)
- Teamcenter 12.0.0 (4-tier)
- Teamcenter 13.0.0 (4-tier)
- Teamcenter 14.0.0 (4-tier)

The following DBMS are supported:

- Oracle Database 11g Release 2 and above
- H2 DB 1.4

1.1.1 Required 3DEXPERIENCE roles

Collaborative Business & Industry Innovation	PCS
Engineering Adapter for X-PDM	MUX (Gateway installation is not required)
3D Component Designer for PLM Services	XCD (replaced with UES in R2021x)
+RichClient Role such as EXH, MDG, ...	

To use the Batch Import/Export in a CAS environment, a permanent Login Ticket is required.

1.1.2 Software Requirements for Oracle Database

For legal reasons TCI does no longer contain the oracle driver (ojdbc). You need to get the OJBDC driver matching your database version (e.g. ojdbc8.jar). You can either get it from your Oracle installation or download it from Oracle. The driver should be copied to the lib folder of the Tomcat that runs TCI.

1.2 Shipment

The software delivery contains the following parts (depending on desired operating system architecture):

- TCI
- TCI Converter Server (XCI_CS)
- TCI File Cache (XCI_FC)
- TCI Teamcenter Rich Client Plugin (TCI_TC_UI)
- TCI 3DEXPERIENCE Rich Client Extension (TCI_3DX_UI)
- XCI 3DEXPERIENCE Batch (XCI_3DX_BATCH)
- COM/ReconV5 (COMReconV5)
- Licman20
- TCI documentation

The product makes use of 3rd Party and Open Source Software. A list of the used products and its licenses is distributed with the software.

2 Infrastructure Overview

2.1 Overview


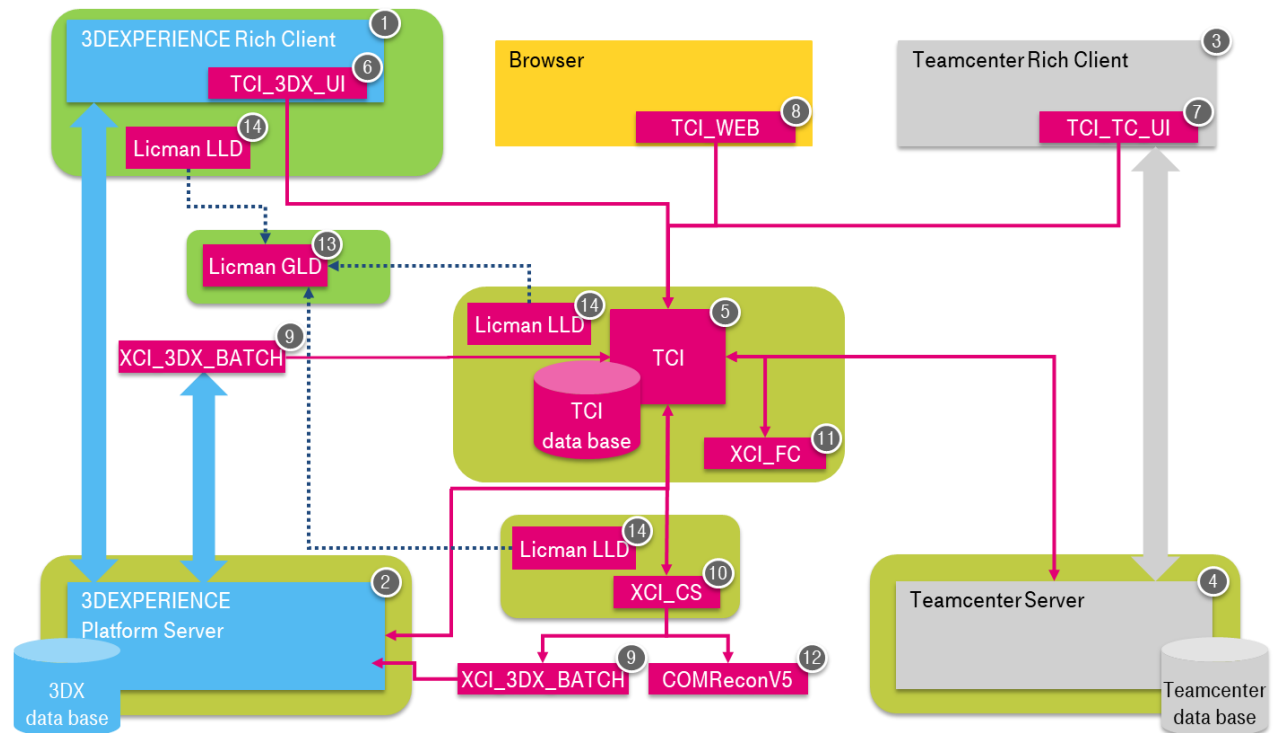


Figure 1: TCI Infrastructure Overview

1. 3DEXPERIENCE Rich Client
2. 3DEXPERIENCE Server
3. Teamcenter Rich Client
4. Teamcenter Server
5. TCI Server
6. TCI 3DEXPERIENCE Rich Client Extension
7. TCI Teamcenter Rich Client Plugin
8. TCI Web Client
9. XCI 3DEXPERIENCE Batch
10. TCI Converter Server (XCI_CS)
11. TCI File Cache (XCI_FC)
12. CATIA V5 CAD data processing (COM/ReconV5) Batch
13. LICMAN Server (GLD)
14. LICMAN Client (LLD)

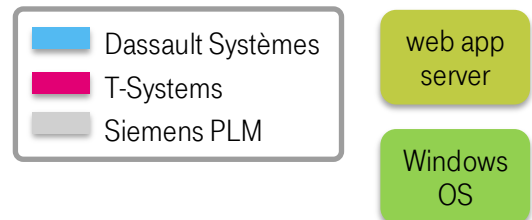

2.2 Infrastructure Remarks

The TSI3DXBatch (XCI 3DEXPERIENCE Batch) must be installed at each TCI Converter Server which uses the TSI3DXBatch.

If V5ToV6Preprocessing or V6ToV5Postprocessing is enabled, the COMReconV5 package must be installed at the configured hosts. A CATIA V5 client environment with the same CATIA V5 version is a prerequisite.

If the usage of the TSI3DXBatch (XCI 3DEXPERIENCE Batch package) is configured, the XCI 3DEXPERIENCE Batch must be installed at the configured hosts. A 3DEXPERIENCE rich client environment (CATIA V6) is a prerequisite.

3 Installing TCI

3.1 Prerequisites

3.1.1 Enable secure communication via https

You can skip this step if no secure communication (https) is used.

For secure communication (https) with the connected servers (Teamcenter and 3DEXPERIENCE) make sure that the necessary certificates are installed at the TCI host. The certificates must be copied from the Teamcenter server and the 3DEXPERIENCE server respectively and imported into the JAVA installation.

Open a command shell as administrator and check or set the proper Java home directory:

```
set JRE_HOME=<yourJreDir>
```

Use the keytool.exe in your Java installation. The default password is "changeit".

```
"%JRE_HOME%\bin\keytool.exe" -import -keystore "%JRE_HOME%\lib\security\cacerts"  
-storepass changeit -noprompt -trustcacerts -alias <yourAlias> -file  
<yourFile.crt>
```

3.1.2 Teamcenter

The Teamcenter 4-tier server has been installed.

The following values will be used in the following steps below:

Setting Name	Setting Value
Teamcenter URL	https://my.tc-server.url:8080/tc

Table 1: Teamcenter settings

3.1.2.1 Teamcenter SOA Client

The Teamcenter SOA Client libraries of the file `soa_client.zip` of the Teamcenter installation package have to be extracted to a known directory, e.g. `C:\TC1120\soa_client`.

This directory will be called `<SOA_CLIENT>` in this document.

3.1.2.2 Teamcenter file handling

Teamcenter can use `FileServerCache` or `FileClientCache`, see Teamcenter->FileManagement settings.

For `FileClientCache` the Teamcenter TCCS package must be installed to a known directory, e.g. `C:\TC1120\tccs`. This directory will be called `<FMS_HOME>` in this document.

3.1.3 3DEXPERIENCE

3.1.3.1 Direct access to 3DEXPERIENCE server

TCI offers functionality that requires a direct access to the 3DEXPERIENCE server:

- Query for and display of 3DEXPERIENCE CAD objects from within Teamcenter rich client
- Import/export of CAD objects with the TSI 3DEXPERIENCE batch

As a prerequisite the following libraries must be copied from the 3DEXPERIENCE server installation:

```
<3DEXPERIENCE install path>
\3DSpace\win_b64\docs\javaserver\eMatrixServletRMI.jar

<3DEXPERIENCE install path>\3DSpace\win_b64\docs\java\FcsClient.jar
```

to the Apache Tomcat lib directory:

```
<TCI install path>\apache-tomcat-8.5.50\lib
```

The 3DEXPERIENCE libraries can also be copied to a directory and added in the Tomcat configuration (see section 3.2.1)

See chapter 3.3.2.4.1 for more details about 3DEXPERIENCE server access.

Please refer to Chapter 3.2.1 for how to install the TCI web application.

3.2 TCI setup

This section describes how you should install the TCI, XCI_FC, and XCI_CS.

TCI uses the XPDM infrastructure of the 3DEXPERIENCE to exchange data between 3DEXPERIENCE and Teamcenter. Both systems must be accessible from TCI.

3.2.1 Setup TCI as web application

TCI will be deployed to a web application server.

TCI will be installed in a directory on the host machine. This directory will be called installation directory in the following steps.

For example:

```
C:\TCI
```

This directory will be called <TCI_HOME> in this document.

The web application server Tomcat has to be installed to a known directory, e.g.

```
C:\TCI\apache-tomcat-8.5.50.
```

This directory will be called <CATALINA_HOME> in this document.

The web application must have access to the Teamcenter and 3DEXPERIENCE libraries in the classpath. Therefore, the following lines have to be added to the Tomcat configuration file <TOMCAT_HOME>/conf/context.xml in the Resources section

(see <https://tomcat.apache.org/tomcat-8.0-doc/config/resources.html> for more information):

```
...
<Resources>
  <PostResources
    className="org.apache.catalina.webresources.DirResourceSet"
    base="<soa-client-dir>/java/libs"
    webAppMount="/WEB-INF/lib">
  </PostResources>
  <PostResources
    className="org.apache.catalina.webresources.DirResourceSet"
```

```

        base="<soa-client-dir>/java/libs/com.teamcenter.rac.external_14000.0.0"
        webAppMount="/WEB-INF/lib">
    </PostResources>
    <PostResources
        className="org.apache.catalina.webresources.JarResourceSet"
        base="<3dexp-dir>/eMatrixServletRMI.jar"
        webAppMount="/WEB-INF/classes">
    </PostResources>
    <PostResources
        className="org.apache.catalina.webresources.JarResourceSet"
        base="<3dexp-dir>/FcsClient.jar"
        webAppMount="/WEB-INF/classes">
    </PostResources>
    <PostResources
        className="org.apache.catalina.webresources.DirResourceSet"
        base="<XCI_HOME>/custom"
        webAppMount="/WEB-INF/lib">
    </PostResources>
</Resources>
...

```

Where <3dexp-dir> needs to be replaced by the absolute or relative path to the 3DEXPERIENCE library locations. <soa-client-dir> is the location of the extracted JAR files from the Teamcenter SOA Client libraries (soa_client.zip) distributed with Teamcenter (see chapter 3.1.2.1).

The following environment variables need to be set for the TCI web application:

Environment Variable	Example Value	Description
XCI_HOME	C:\TCI	XCI home directory
FMS_HOME	C:\TC1120\tccs	Teamcenter FMS home directory for using the FCC, not the FSC.
CATALINA_HOME	C:\TCI\apache-tomcat-8.5.50	Tomcat Catalina home directory
JRE64_HOME	C:\Program Files\Java\jre1.8.0_202	JRE home directory JRE_HOME or JRE64_HOME or JAVA_HOME must be set for the FCC.
JDK_JAVA_OPTIONS	%JDK_JAVA_OPTIONS% -Djlicman.platform="Windows_2003_amd64" -Djava.library.path=%FMS_HOME%;%FMS_HOME%/lib	Append additional Java 11 Options
JAVA_OPTS	%JAVA_OPTS% -Djlicman.platform="Windows_2003_amd64" -Djava.library.path=%FMS_HOME%;%FMS_HOME%/lib	Append additional Java 8 Options

Table 2: TCI web application environment variables

The `Djava.library.path` option and `FMS_HOME` environment is needed for FCC, not for FSC (see section 3.3.2.3.4).

The following batch file can be used to start the Tomcat application server:

```
set FMS_HOME=<Teamcenter FMS Home directory>
set PATH=%FMS_HOME%\bin;%FMS_HOME%\lib;%PATH%
set XCI_HOME=<TCI Home directory>
set CATALINA_HOME=<Tomcat Catalina Home directory>
set JRE64_HOME=<JRE Home directory>
set JDK_JAVA_OPTIONS=%JDK_JAVA_OPTIONS% -Djlicman.platform="Windows_2003_amd64" -Xms256m -Xmx2048m
call %CATALINA_HOME%\bin\startup.bat
```

The TCI war file can now be deployed to the application server.

Copy the war file of TCI, e.g. `XCI.war`, to the `webapps` directory of the web application server.

3.2.2 Setup XCI_FC as web application

If the `XCI_FC` is configured (*TDXExportMode* is *ExportFiles* and *FileCache* is *enabled*) the `XCI_FC` must be set up as web application.

`XCI_FC` will be deployed to a web application server.

The following environment variables must be set for the XCI_FC web application:

Environment Variable	Example Value	Description
XCI_FC_HOME	C:\TCI\XCI_FC_HOME	XCI_FC home directory
CATALINA_HOME	C:\TCI\XCI_FC_HOME\apache-tomcat-8.5.50	Tomcat Catalina home directory
JRE64_HOME	C:\Program Files\Java\jre1.8.0_202	JRE home directory
JDK_JAVA_OPTIONS	% JDK_JAVA_OPTIONS % -Xms256m -Xmx2048m	Append additional Java options

Table 3: XCI_FC web application environment variables

The following batch file can be used to start the Tomcat application server:

```
set XCI_FC_HOME=<TCI FC Home directory>
set CATALINA_HOME=<Tomcat Catalina Home directory>
set JRE64_HOME=<JRE Home directory>
set JDK_JAVA_OPTIONS=%JDK_JAVA_OPTIONS% -Xms256m -Xmx2048m
call %CATALINA_HOME%\bin\startup.bat
```

The XCI_FC war file can now be deployed to the application server.

Copy the war file of XCI_FC, e.g. XCI_FC.war, to the webapps directory of the web application server.

3.2.3 Setup XCI_CS as web application

If the XCI_CS is configured (usecs is true in one of the following settings: *V5ToV6Preprocessing*, *V6ToV5Postprocessing*, *SendToXPDMProcessing*, *XPDMExportProcessing*, *XPDMImportProcessing*, *FolderExportProcessing*, *FolderImportProcessing*, *FileExportProcessing*) the XCI_CS must be set up as web application.

XCI_CS will be deployed to a web application server.

The following environment variables have to be set for the XCI_CS web application:

Environment Variable	Example Value	Description
XCI_CS_HOME	C:\TCI\XCI_CS_HOME	XCI_CS home directory
CATALINA_HOME	C:\TCI\XCI_CS_HOME\apache-tomcat-8.5.50	Tomcat Catalina home directory
JRE64_HOME	C:\Program Files\Java\jre1.8.0_202	JRE home directory
JDK_JAVA_OPTIONS	%JDK_JAVA_OPTIONS% -Xms256m -Xmx2048m	Append additional Java options

Table 4: XCI_CS web application environment variables

The following batch file can be used to start the Tomcat application server:

```
set XCI_CS_HOME=<TCI CS Home directory>
set CATALINA_HOME=<Tomcat Catalina Home directory>
set JRE64_HOME=<JRE Home directory>
```

```
set JDK_JAVA_OPTIONS=%JDK_JAVA_OPTIONS% -Xms256m -Xmx2048m
call %CATALINA_HOME%\bin\startup.bat
```

The XCI_CS war file can now be deployed to the application server.

Copy the war file of XCI_CS, e.g. XCI_CS.war, to the webapps directory of the web application server.

3.3 TCI configuration

After the installation TCI must be configured in the following configuration files in the installation directory.

3.3.1 Logging configuration

TCI will read and apply the log4j configuration from the following file in the TCI_HOME directory:

```
log4j2.xml
```

For a standard configuration copy the properties file log4j2.xml.sample of the installation package to the <TCI_HOME> directory and rename it to log4j2.xml.

It is recommended to create an empty logging directory at <TCI_HOME>/logs.

Please check the *.File entries of the properties file if they are pointing to a valid directory.

Further information about the configuration can be obtained from <https://logging.apache.org/log4j/>. If none of the files is present when starting TCI it will apply its embedded default configuration, logging only to the standard output. To simplify the configuration a sample is distributed with TCI.

3.3.2 General TCI configuration

Copy the files XCISettings.xml (XCISettings.xml.sample) and XCISettings.xsd of the installation package to the installation directory.

The file XCISettings.xml defines all the functional settings for TCI. The settings file can be evaluated using the XCISettings.xsd file delivered with TCI.

It is divided into the five sections *Conversion*, *Pdm*, *Teamcenter*, *Enovia*, and *XciWeb*.

In the next chapters the configuration of these sections will be described in detail.

3.3.2.1 Conversion

In the following chapters the configuration options for the tag *Conversion* are described.

3.3.2.1.1 Database configuration

TCI makes use of a database to store and keep track of required data. The used database can be configured using the resource definition of the application server. TCI will read the resource defined as "jdbc/xciDB".

The default resource can be overridden by defining the *PersistenceUnitName* in the settings (/XCISettings/Conversion/Database).

```
<Database>
  <PersistenceUnitName>jdbc/myXciDB</PersistenceUnitName>
</Database>
```


Example resource definitions in Tomcat 8 (e.g. `<CATALINA_HOME>/conf/context.xml`):

```
<Resource name="jdbc/xciDB" type="javax.sql.DataSource"
    auth="Container" driverClassName="org.h2.Driver"
    maxTotal="100" maxIdle="10" maxWaitMillis="-1"
    url="jdbc:h2:C:\XCI\XCI_HOME\xciDB\xciDB;AUTO_SERVER=TRUE"
    username="XCI"
    password="XCI" />
```

or

```
<Resource name="jdbc/xciDB" type="javax.sql.DataSource"
    auth="Container" driverClassName="oracle.jdbc.OracleDriver"
    maxTotal="100" maxIdle="10" maxWaitMillis="-1"
    url="jdbc:oracle:thin:@my.db-server-url.com:1521:orcl"
    username="XCI"
    password="XCI" />
```

If the resource is not defined a local and file based H2DB will be created in the home directory.

The selection of the database can be overridden by defining a custom *Database* in the settings (/XCISettings/Conversion/Database).

```
<Database override="true" driverClassName="oracle.jdbc.OracleDriver"
    url="jdbc:oracle:thin:@my.db-server-url.com:1521:orcl">
    <Property name="user" value="tci" />
    <Property name="password" value="tci" />
    <Property name="maxTotal" value="20" />
    <Property name="maxIdle" value="10" />
    <Property name="maxWaitMillis" value="-1" />
</Database>
```

With

- *override*: true to use database defined here; false to use definition from JNI context
- *driverClassName*: Database driver class
- *url*: Database connection URL

3.3.2.1.2 General settings

```
<TempDir>C:\temp</TempDir>
```

Optional definition of a temporary directory to be used by TCI. TCI must have read and write access to this directory.

If the value is not defined the path "`<TCI_HOME>\temp`" will be used.

```
<PersistentDir>C:\persistent</PersistentDir>
```

Optional definition of a directory to be used by TCI to store persistent data. TCI must have read and write access to this directory.

If the value is not defined the path "`<TCI_HOME>\persistent`" will be used.

```
<RenameFilesAfterDownload>true</RenameFilesAfterDownload>
```

Rename the files after download from Teamcenter to the value of the `original_file_name` attribute.

The default setting is "true".

```
<RenameFileTypesAfterDownload enabled="true">
  <FileType>CATDrawing</FileType>
</RenameFileTypesAfterDownload>
```

List of file types which will be renamed to `obid.extension`, to support multiple objects with the same file name. Should only be used with file types which are not referenced by other files (CATDrawing, JT, etc.). This setting is ignored if *RenameFilesAfterDownload* preference is set to "false".

```
<ImportPdm enableLevelSplitUp="true"
  enableLevelSetBased="false"
  enableQueuing="false"
  timeoutQueuing="600000"
  enableLevelQueuing="true"
  timeoutLevelQueuing="600000" />
```

Strategy how to import the V6 structures to Teamcenter:

enableLevelSplitUp: The default value is "false". True will enable the split up of the Teamcenter import in a level-based import.

enableLevelSetBased: The default value is "false". True will enable the set-based approach for the import of one level.

The level-based import will start at the deepest level nodes of the product structure and will first import these leaf nodes, then the parent objects up to the top level are imported including the direct children. If *enableLevelSetBased* is set to "true" then the same levels are imported in one import process (using the set-based import), else each object is imported in its own import process.

enableQueuing: true will enable the functionality to not handle the same part number in parallel running PDM imports.

timeoutQueuing: Timeout for the import queuing [ms]. Default value 10 minutes.

enableLevelQueuing: true will enable the functionality to not handle the same part number in parallel running PDM level imports.

timeoutLevelQueuing: Timeout for the import queuing [ms]. Default value 10 minutes.

```
<ExportPdm enableQueuing="true"/>
```

enableQueuing: true will enable the functionality to not handle the same part number in parallel running PDM exports.

timeoutQueuing: Timeout for the export queuing [ms]. Default value (600000) 10 minutes.

```
<Import3DXenableQueuing="true"/>
```

enableQueuing: true will enable the functionality to not handle the same part number in parallel running 3DX imports.

timeoutQueuing: Timeout for the import queuing [ms]. Default value (600000) 10 minutes.

```
<DisablePdmImportSkipNotModified>true</DisablePdmImportSkipNotModified>
```

To disable the skipping the import of objects to Teamcenter which are not modified since the last import, it must be set to “true”.

The default setting is “false”.

```
<LegacyTransformationSupport enabled="true" />
```

Enables the support for legacy transformation in Teamcenter if *enabled* is set to “true”.

The default setting is “true”.

```
<IgnoreNon3DPartGeometries enabled="true" />
```

Enables the ignoring of geometries which are not 3DPart in 3DEXPERIENCE if *enabled* is set to “true”.

The default setting is “false”.

3.3.2.1.3 XpdmXmlExportChecks definition

```
<XpdmXmlExportChecks>
  <AttributeCheck enabled="true">
    <XType xname="Product">
      <XAttribute xname="Description"
        mappingtype="DefaultCustomization"
        maxlength="60"
        truncate="true" />
    </XType>
  </AttributeCheck>
  <InstanceNameCheck enabled="true" />
  <FileRefCheck enabled="false" />
  <FileNameCheck enabled="false" />
  <ProductLeafRepresentationCheck enabled="false" onlyWarning="true" />
  <RepNameCheck enabled="true" />
</XpdmXmlExportChecks>
```

Definition of the export checks.

Each *AttributeCheck* must be enabled and disabled with the *enabled* attribute. The optional *onlyWarning* attribute can be set to “true”. Then the check is handled as warning condition not as error condition.

The *AttributeCheck* is used to check the *maxlength* attribute in the *CustomAttribute* (see chapter 3.3.2.2.1) setting.

Additionally, the standard attribute length can be checked. The example above shows the limitation of the “Description” to maximum length of “60”. If the maximum length of the attribute is defined, the *truncate* attribute flag enables the truncate functionality which will truncate the attribute to the maximum length.

The *InstanceNameCheck* checks the uniqueness of instance name per parent object.

The *FileRefCheck* checks the multiple use of a File Ref from different Objects.

The *FileNameCheck* checks the uniqueness of file names in the files section.

The *ProductLeafRepresentationCheck* checks the existence of an attached Representation at a Product node, if the Product node is a leaf node.

The *RepNameCheck* checks for duplicate representation names. ID Attribute in Rep3D, Drawing, Document, and GenericDocument Object.

These five tags have the attributes *enabled* and *onlyWarning*. The attribute *enabled* is required. The attribute *onlyWarning* is optional and has the default "false".

3.3.2.1.4 Teamcenter Project definitions

```
<Projects>
  <DefaultProject name="Default">
    <ProjectName>Standard</ProjectName>
    <Organization>Company Name</Organization>
    <Owner>DemoDesigner</Owner>
    <LifeCycle>VPLM_SMB</LifeCycle>
    <Maturity>RELEASED</Maturity>
    <MaturityNoStatus>IN_WORK</MaturityNoStatus>
  </DefaultProject>
</Projects>
```

Definition of projects and the corresponding values for *ProjectName*, *Organization*, *Owner*, *LifeCycle*, *Maturity* and *MaturityNoStatus*. The *Projects* section must include one *DefaultProject* that will be used when no other defined project matches.

The defined values for the projects define which values will be set to the items when sending them to 3DEXPERIENCE. If no project is defined or no values are defined for a project the values from the default project are used.

The values for *Organization* and *Owner* can be left blank. These will be set to the values of the importing administration user on the 3DEXPERIENCE import.

The value for *MaturityNoStatus* will be used for objects without status. If this value is not defined, the value for *Maturity* will be used.

For the Non-CATIA document import the Maturities and LifeCycle can be defined for Document and GenericDocument types.

The defaults for Document and GenericDocument types are:

Default Document Maturity: *Exists*

Default Document Lifecycle: *Document*

Default GenericDocument Maturity: *WIP*

Default GenericDocument Lifecycle: *Controlled Production Release Rev2*

These defaults can be set in the Project settings:

```
<DefaultProject name="Default">
  ...
  <DocumentLifeCycle>Document Release</DocumentLifeCycle>
  <DocumentMaturity>RELEASED</DocumentMaturity>
  <DocumentMaturityNoStatus>IN_WORK</DocumentMaturityNoStatus>
  <GeneralDocumentLifeCycle>Controlled Production Release Rev2</GeneralDocumentLifeCycle>
  <GeneralDocumentMaturity>Released</GeneralDocumentMaturity>
  <GeneralDocumentMaturityNoStatus>WIP</GeneralDocumentMaturityNoStatus>
</DefaultProject>
```

3.3.2.1.5 Teamcenter User and Group definitions

```
<UserMappingForPdm owner="user1" group="Engineering">
  <AdditionalChangeOwnerObjectsForPdm>
    <ExpandRelationType>IMAN_specification</ExpandRelationType>
```

```

        <ExpandRelationType>IMAN_master_form</ExpandRelationType>
        <ExpandType>CMI2Product</ExpandType>
        <ExpandType>ItemRevision Master</ExpandType>
    </AdditionalChangeOwnerObjectsForPdm>
</UserMappingForPdm>

```

The *owner* will be used for new objects in Teamcenter.

Warning: This can cause access problems, if you want to transfer objects a second time to Teamcenter. If *owner* is not configured, the default Teamcenter behavior defines the owner.

The *group* will be used for new objects in Teamcenter. If *group* is not configured, the default Teamcenter behavior defines the group.

If *AdditionalChangeOwnerObjectsForPdm* is configured, all objects of the configured relation types *ExpandRelationType* and expand types *ExpandType* will be determined and also assigned to the Teamcenter *owner* and *group*.

3.3.2.1.6 Teamcenter Item Revision cleanup setting

```

<RevisionCleanupForPdm>
    <cleanChildren enabled="true" bvrType="view" />
    <cleanDocuments enabled="true">
        <ExpandRelationType>IMAN_specification</ExpandRelationType>
        <ExpandRelationType>IMAN_Rendering</ExpandRelationType>
        <ExpandType>CMI2Part</ExpandType>
        <ExpandType>CMI2Product</ExpandType>
        <ExpandType>CMI2Drawing</ExpandType>
        <ExpandType>DirectModel</ExpandType>
    </cleanDocuments>
</RevisionCleanupForPdm>

```

If *cleanChildren* is enabled, all children are removed for new created Item Revisions during Teamcenter import. The default BVR type is “view” and can be configured by the *bvrType* attribute. The default for the *enabled* flag is “false”.

If *cleanDocuments* is enabled, all documents configured by type (*ExpandType*) and relation (*ExpandRelationType*), are removed from new created Item Revisions during Teamcenter import. The default for the *enabled* flag is “false”.

3.3.2.1.7 Revision mapping

```
<PdmRevisionMapping >alphabetical</PdmRevisionMapping >
```

The *PdmRevisionMapping* defines the revision numbers in Teamcenter as *numerical* or *alphabetical*.

If *PdmRevisionMapping* is configured, TCI will perform a direct assignment between the revisions of Teamcenter and 3DEXPERIENCE via XPDMXML (e.g. Teamcenter revision “D” will be transferred as revisionindex “4” to 3DEXPERIENCE). As a result of this configuration, the revisions in Teamcenter or 3DEXPERIENCE may have gaps if only selected revisions are transferred.

If the *PdmRevisionMapping* is not configured the next free revision/index will be used.

3.3.2.1.8 Document Revision mapping

```
<PdmDocumentRevisionMapping>alphabetical</PdmDocumentRevisionMapping>
```

The *PdmDocumentRevisionMapping* defines the revision numbers for documents in Teamcenter as *numerical* or *alphabetical*.

If *PdmDocumentRevisionMapping* is configured, TCI will perform a direct assignment between the revisions of Teamcenter and 3DEXPERIENCE via XPDMXML (e.g. Teamcenter revision “D” will be

transferred as revisionindex "4" to 3DEXPERIENCE). As a result of this configuration, the revisions in Teamcenter or 3DEXPERIENCE may have gaps if only selected revisions are transferred.

If the *PdmDocumentRevisionMapping* is not configured the next free revision/index will be used.

3.3.2.1.9 File type mapping definitions

3.3.2.1.9.1 V6 to Teamcenter file type mapping

```
<V6PdmFileType>
  <V6FileFormat v6format="CATPart">
    <Main>
      <PdmDocType>CMI2Part</PdmDocType>
      <PdmDocRelation>IMAN_specification</PdmDocRelation>
      <PdmRefType>CATPart</PdmRefType>
    </Main>
    <Aux>
      <PdmDocType>CMI2AuxPart</PdmDocType>
      <PdmDocRelation>IMAN_specification</PdmDocRelation>
      <PdmRefType>CATPart</PdmRefType>
    </Aux>
  </V6FileFormat>
</V6PdmFileType>
```

The *V6PdmFileType* can contain multiple *V6FileFormats* defining how the specified file should be imported to Teamcenter.

Each *V6FileFormat* defines a *PdmDocType*, a *PdmDocRelation*, and a *PdmRefType* in the *Main* section. The same is defined for *Aux* documents. The *Aux* definition is used for shared representations.

3.3.2.1.9.2 Teamcenter to V6 file type mapping

```
<PdmV6FileType>
  <V6Representation fileextension="CATPart" doctype="CMI2Part">
    <RepresentationType>Rep3D</RepresentationType>
    <DerivedType>DirectModel</DerivedType>
  </V6Representation>
  <V6Representation fileextension="prt.*" fileformat="Creo" doctype="CreoPart">
    <RepresentationType>Rep3D</RepresentationType>
  </V6Representation>
</PdmV6FileType>
```

The *PdmV6FileType* can contain multiple *V6Representations* defining how the specified file should be exported from Teamcenter. The *V6Representation* has the optional attribute *aux* with default "false". The *fileextension* can also contain wildcards. The *fileformat* can be used if the file extension is not the file format in the XPDMXML file.

Each *V6Representation* defines a *RepresentationType* and a *DerivedType*.

RepresentationType can be *Drawing*, *Rep3D*, *Rep3DAndOriginalDocument*, *Product*, *ProductOrRep3D*, *Document*, or *GenericDocument*.

3.3.2.1.10 Customization registration

```
<Customizations>
  <CustomizationPoint custpoint="com.tsystems.xci.customization.CustomizationPointX"
    entypoint="my.customization.MyCustomizationPointImpl" />
</Customizations>
```

The behavior of the integration can be modified using customization points. The *Customizations* tag may contain multiple *CustomizationPoints* defining which customization implementation should be used. Each *CustomizationPoint* defines a *custpoint* to be overridden and an *entrypoint* specifying the overriding implementation. The optional attribute *enabled* has the default “true”.

It is not necessary to set a customization point. All customization points are implemented using the integration default behavior.

If you require any kind of customization please contact the support team.

3.3.2.1.11 SetTimeModified setting

```
<SetTimeModified>
  <Rep3D disabled="true" />
  <Drawing disabled="true" />
  <Document disabled="true" />
  <GenericDocument disabled="true" />
  <ProductFile disabled="true" />
  <Product disabled="true" />
  <ProductInst disabled="true" />
</SetTimeModified>
```

The *<TimeModified>* tag is by default written to the *<Rep3D>*, *<Rep3DAggr>*, *<Drawing>*, *<DrawingAggr>*, *<Document>*, *<GenericDocument>*, *<Product>*, and *<ProductInst>* tags in the *Metadata.xml* import file. With this time information the import can skip already imported files and optimize the performance of the import process.

This optimization can be disabled, e.g. to resolve multi model links in several contexts.

SetTimeModified has the attribute *enabled* with default “true”.

3.3.2.1.12 SharedFileTypeExtensions setting

```
<SharedFileTypeExtensions>
  <SharedFileTypeExtension>model</SharedFileTypeExtension>
  <SharedFileTypeExtension>cgr</SharedFileTypeExtension>
  <SharedFileTypeExtension>CATDrawing</SharedFileTypeExtension>
</SharedFileTypeExtensions>
```

Documents are by default written as *Rep3DAggr* or *DrawingAggr* object in the *metadata.xml* input file. All file extensions which are defined in the *SharedFileTypeExtensions* setting are written as shared object type *Rep3DInst/Rep3D* or *DrawingInst/Drawing* objects in the *metadata.xml* input file and they will be created as a shared object in the 3DEXPERIENCE.

3.3.2.1.13 Exclusion List File settings

```
<ExclusionListFile>C:\tmp\exclusionlist.xml</ExclusionListFile>
```

The *ExclusionListFile* is the exclusion list with the invalid CAD objects which should not be imported to 3DEXPERIENCE and are replaced by the Dummy Item. The Dummy Item can be configured with the *<DummyProductData>* setting.

```
<ExclusionCATProductsListFile>C:\tmp\exclusioncplist.xml</ExclusionCATProductsListFile>
```

The *ExclusionCATProductsListFile* is the exclusion list with the CAD objects for which the CATProduct files should be ignored.

```
<TimeModifiedExclusionListFile
```

`removeTimeStamp="false">C:\tmp\exclusiontmlist.xml</TimeModifiedExclusionListFile>`

The *TimeModifiedExclusionListFile* is the exclusion list with the CAD objects for which the *TimeModified* tag should be changed/removed. The optional attribute *removeTimeStamp* has the default "false".

Example for an Exclusion list settings file.

```
<?xml version="1.0" encoding="ISO-8859-1" standalone="yes"?>
<EL>
  <ItemRev>
    <Id>DREP2-TSI2-0001</Id>
    <Type>Design Revision</Type>
    <Revision>1</Revision>
  </ItemRev>
  <Item>
    <Id>DREP2-TSI2-0001</Id>
    <Type>Design Revision</Type>
  </Item>
</EL>
```

3.3.2.1.14 V5ToV6Preprocessing setting

```
<V5ToV6Preprocessing enabled="true">
  <V5PreprocessingCommand>C:\TCI\COMReconV5_R28\gol\COMReconV5.bat
  C:\TCI\COMReconV5_R28\gol\XCI_V5_V6.opt</V5PreprocessingCommand>
</V5ToV6Preprocessing>
```

The functionality for the V5 Preprocessing with COMReconV5 must be enabled to use the COMReconV5 tool from T-Systems.

```
<V5ToV6Preprocessing enabled="true"
  usecs="true"
  tdsUrl="http://my.tci-integration-server.url:port/XCI/XCI_TDS">
  <V5PreprocessingHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>C:\TCI\COMReconV5_R28\gol\COMReconV5.bat
    C:\TCI\COMReconV5_R28\gol\XCI_V5_V6.opt</Command>
  </V5PreprocessingHost>
</V5ToV6Preprocessing>
```

If *usecs* is set to "true" the *V5PreprocessingHost* setting is used.

Details for *tdsUrl* please see in chapter 3.3.2.4.7.

3.3.2.1.15 V6ToV5Postprocessing setting

```
<V6ToV5Postprocessing enabled="true">
  <V6PostprocessingCommand>C:\TCI\COMReconV5_R28\gol\COMReconV5.bat
  C:\TCI\COMReconV5_R28\gol\XCI_V6_V5.opt</V6PostprocessingCommand>
</V6ToV5Postprocessing>
```

The functionality for the V6 Postprocessing with COMReconV5 must be enabled to use the COMReconV5 tool from T-Systems.

```
<V6ToV5Postprocessing enabled="true"
  usecs="true"
  tdsUrl="http://my.tci-integration-server.url:port/XCI/XCI_TDS">
  <V6PostprocessingHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>C:\TCI\COMReconV5_R28\gol\COMReconV5.bat
    C:\TCI\COMReconV5_R28\gol\XCI_V6_V5.opt</Command>
  </V6PostprocessingHost>
```


</V6ToV5Postprocessing>

If *usecs* is set to "true" the *V6PostprocessingHost* setting is used.

Details for *tdsUrl* please see in chapter 3.3.2.4.7.

3.3.2.1.16 CoexistenceXpdmXmlProcessing setting

<CoexistenceXpdmXmlProcessing disabled="true" />

The coexistence processing functionality (remove of objects which are not controlled by XPDM) can be disabled with this setting.

The default setting is "false".

3.3.2.1.17 DwcProductStructureExport setting

<DwcProductStructureExport enabled="true" />

The downward compatibility product structure export functionality (export CATPart and CATProduct files from 3DEXPERIENCE with one call) can be enabled with this setting.

The default setting is "false".

3.3.2.1.18 FileConversion setting

The file conversion functionality (convert non importable file types to importable file types) can be enabled with this setting.

Import without the Converter Server:

```
<FileConversion enabled="true">
  <ConversionCommand inputtype="iges" outputtype="cgr">
    <Command>C:\converter\iges_cgr_converter.bat</Command>
  </ConversionCommand>
</FileConversion>
```

Import with the use of the Converter Server:

```
<FileConversion enabled="true" resource="CV" usecs="true" tdsUrl="http://my.tci-integration-
server.url:port/XCI/XCI_TDS">
  <FileConversionHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>Command1</Command>
  </FileConversionHost>
  <FileConversionCommand commandName="Command1">
    <ConversionCommand inputtype="iges" outputtype="cgr">
      <Command>C:\converter\iges_cgr_converter.bat</Command>
    </ConversionCommand>
  </FileConversionCommand>
</FileConversion>
```

For configuration details, please see chapter 3.3.2.4.7. For all CS the same converter functionality must be available.

The following windows batch file can be used to start a third-party converter:

```
REM get the input file path
set INPUTFILE=%TCI_CONVERTINPUTFILE%
REM get the output file path
set OUTPUTFILE=%TCI_CONVERTOUTPUTFILE%

if EXIST %INPUTFILE% GOTO CONTINUE1
echo "cannot find >%INPUTFILE%<"
GOTO END_ERROR
```

```

:CONTINUE1

if NOT EXIST %OUTPUTFILE% GOTO CONTINUE2
del %OUTPUTFILE%
:CONTINUE2

echo "converting %INPUTFILE% to %OUTPUTFILE%"

REM call the converter
converter.exe %INPUTFILE% %OUTPUTFILE%

set retval=%ERRORLEVEL%

:END
exit /b %retval%

:END_ERROR
REM not equal 0 for error
exit /b 1

```

3.3.2.1.19 V6MaturityToPdmStatusMappingList setting

```

<V6MaturityToPdmStatusMappingList enabled="true">
  <V6MaturityToPdmStatusMapping v6maturity="RELEASED"
                                pdmTyp="Design Revision"
                                pdmstatus="TCM Released" />
</V6MaturityToPdmStatusMappingList>

```

The maturity status mapping list defines the mapping between the V6 Maturity and the Status object name in Teamcenter. When the functionality is enabled all 3DEXPERIENCE Objects with the Maturity defined in the *v6maturity* attribute will get a Status object with the name from the *pdmstatus* attribute. The attribute *enabled* has default "false".

3.3.2.1.20 PdmStatusUpdateHandling setting

```

<PdmStatusUpdateHandling enabled="true">
  <AdditionalPdmStatusUpdate sourceType="Design Revision"
                             targetRelationType="IMAN_master_form"
                             targetObjectType="Design Revision Master" />
  <AdditionalPdmStatusUpdate sourceType="Design Revision"
                             targetRelationAttribute="structure_revisions"
                             targetObjectType="BOMView Revision" />
</PdmStatusUpdateHandling>

```

Used to set the Item Revision Status to objects which are not directly mapped to a 3DEXPERIENCE object, e.g. Master forms, BOMView Revisions, PDF document.

The *sourceType* defines the Item Revision type under which the additional objects should be updated. The attribute *enabled* has default "false".

The example settings show an example for a Relation based setting ("IMAN_master_form") and an Attribute based setting ("structure_revisions").

3.3.2.1.21 UseXidFromOcclId setting

```

<UseXidFromOcclId>true</UseXidFromOcclId>

```

Use the Occurrence ID for the Instance XID generation and only the instance name for identification of instances. If the setting is "true" but the child does not match the last known child, the instance is marked for a post processing task to correct the children in 3DEXPERIENCE.

The default setting is “false”.

3.3.2.1.22 CleanupPersistentDir setting

<CleanupPersistentDir>true</CleanupPersistentDir>

Used to clean up the persistent directory when the content is successfully transferred.

The default setting is “false”.

3.3.2.1.23 RenameDuplicateInstanceNames setting

<RenameDuplicateInstanceNames>true</RenameDuplicateInstanceNames>

Used to rename duplicate instance names. Duplicates will be renamed to the Object Id of the relation.

The default setting is “false”.

3.3.2.1.24 CopyInstanceOrderNumberToV6 setting

<CopyInstanceOrderNumberToV6>false</CopyInstanceOrderNumberToV6>

The default setting is “true”.

3.3.2.1.25 TDXExportMode setting

<TDXExportMode>ExportXPDM</TDXExportMode>

The 3DXExportMode can be configured.

Possible values are:

- *ExportXPDM*: Direct export of a structure from 3DEXPERIENCE using the ExportBatch utility.
- *ExportFiles*: Direct export of a structure from 3DEXPERIENCE using the DWC utility.
- *ExportDesign*: Direct export of a structure from 3DEXperience using the Rest API.
- *ExportStepx (DS Cloud only)*: Direct export of a structure from 3DEXperience using the Enterprise IP Exchange service.

Default setting is “ExportFiles”.

3.3.2.1.26 TDXImportMode setting

<TDXImportMode>ImportXPDM</TDXImportMode>

The 3DXImportMode can be configured.

Possible values are:

- *ImportXPDM*: Direct import of a structure to 3DEXPERIENCE using the ImportBatch utility.
- *ImportDesign (DS Cloud only)*: Direct import of a structure to 3DEXPERIENCE using the Enterprise IP Exchange service.

Default setting is “ImportXPDM”.

3.3.2.1.27 ProcessStatusOnlySessionUser setting

<ProcessStatusOnlySessionUser>true</ProcessStatusOnlySessionUser>

Filter the result of the ProcessStatus by the actual session user.

The default setting is “true”.

3.3.2.1.28 ProcessStatusMaxReturn setting

<ProcessStatusMaxReturn>50</ProcessStatusMaxReturn>

The maximum number of ProcessStatus information to return for the ProcessStatus command.
The default setting is “50”.

3.3.2.1.29 ProcessStatusMaxDuration setting

<ProcessStatusMaxDuration>P7D</ProcessStatusMaxDuration>

The search period until now used to search for ProcessStatus information for the ProcessStatus command.

The default setting is “P7D”.

3.3.2.1.30 ReceiverMaxEventNumber setting

<ReceiverMaxEventNumber>5</ReceiverMaxEventNumber>

The maximum number of the events to handle. Minimum is “1”. A restart is needed to use the new value.

The default setting is “1”.

3.3.2.1.31 ReceiverThreadPoolSize setting

<ReceiverThreadPoolSize>10</ReceiverThreadPoolSize>

The size of the Receiver thread pool. Minimum is “1”. A restart is needed to use the new value.

The default setting is “1”.

3.3.2.1.32 JobReceiverThreadPoolSize setting

<JobReceiverThreadPoolSize>10</JobReceiverThreadPoolSize>

The size of the Job Receiver thread pool. Minimum is “3”. Restart needed to use the new value.

The default setting is “5”.

3.3.2.1.33 JobReceiverComplexThreadPoolSize setting

<JobReceiverComplexThreadPoolSize>6</JobReceiverComplexThreadPoolSize>

The size of the Job Receiver complex thread pool (used for Folder transfers). Minimum is 1. Restart needed to use the new value.

The default setting is “3”.

3.3.2.1.34 JobReceiverMaxJobNumber setting

<JobReceiverMaxJobNumber>10</JobReceiverMaxJobNumber>

The maximum number of the jobs to handle. Minimum is “1”. Restart needed to use the new value.

The default setting is “20”.

3.3.2.1.35 FolderNamingConcatenation setting

<FolderNamingConcatenation enabled="true">_</FolderNamingConcatenation>

Set *enabled* to “true” to build the new folder name in PDM from Root Folder Name, this setting, and the Folder Name.

The attribute *enabled* has default “false”.

3.3.2.1.36 ReconciliationMode setting

<ReconciliationMode>xPDMMaster</ReconciliationMode>

The Reconciliation Mode can be defined.

Possible values are:

- *CATProductMaster*: Use CATProduct structure information.
- *xPDMMaster*: Use XPDMXML structure information.

The default setting is *CATProductMaster*.

3.3.2.1.37 ConverterService Resource Balancing definition

```
<CSResourceBalancer>
  <Resource>
    <Name>V6</Name>
    <MaxParallel>2</MaxParallel>
  </Resource>
</CSResourceBalancer>
```

Limits concurrent use of resources across all Converter Server hosts. Resource can be licenses etc. and is identified by a string.

Resources are then applied to different Processing Host types.

The resource names can be defined with the *Resource* attribute at the processing settings.

3.3.2.1.38 PartNumberMapping definition

```
<PartNumberMapping enabled="true">
  <Default>
    <To3DXPrefix>TCI_</To3DXPrefix>
  </Default>
  <TypeMapping typePDM="MyItemRevision">
    <Mapping>
      <To3DXPrefix/>
      <To3DXPostfix/>
      <ToPDMPrefix/>
      <ToPDMPostfix/>
    </Mapping>
  </TypeMapping>
</PartNumberMapping>
```

The part number mapping is used to add pre and postfixes to part numbers in PDM and 3DX. The definition can be set for all types in the default section, or for types defined with *TypeMapping*. The new mapping will only be used for new transfers, the old mapping from the database is used before using this part number mapping.

The attribute *enabled* has default "false".

3.3.2.1.39 SetFilterIn3DX setting

```
<SetFilterIn3DX>true</SetFilterIn3DX>
```

Set *SetFilterIn3DX* to "true" to enable the functionality to set filter in 3DX when sending structure names.

The default for *SetFilterIn3DX* is "true".

See also TCIXpgPostProcess_SETFILTER setting in TCI XPGPostprocessing.

3.3.2.1.40 StoreNamedStructuresetting

```
<StoreNamedStructure>>false</StoreNamedStructure>
```

Set *StoreNamedStructure* to "true" to enable the functionality to store named structures.

The default for *StoreNamedStructure* is "false".

3.3.2.1.41 HandleAuxFileAsMainFile

```
<HandleAuxFileAsMainFile>true</HandleAuxFileAsMainFile>
```

Set *HandleAuxFileAsMainFile* to "true" to handle auxiliary files like main files -> Create Product and Rep3D Aggr in XpdmXml.

The default for *HandleAuxFileAsMainFile* is "false".

3.3.2.1.42 JobRetrySeconds

```
<JobRetrySeconds>0</JobRetrySeconds>
```

The number of seconds to wait for the Job retry if the job fails. 0 will disable the retry.

The default for *JobRetrySeconds* is "30".

3.3.2.1.43 SkipRepWithoutFile

```
<SkipRepWithoutFile>false</SkipRepWithoutFile >
```

True to remove Representations without file -> no document without file.

The default for *SkipRepWithoutFile* is false.

3.3.2.1.44 OverwriteReleasedWithForce

```
<OverwriteReleasedWithForce>false</OverwriteReleasedWithForce>
```

True to update released objects if force is true.

The default for *OverwriteReleasedWithForce* is false.

3.3.2.1.45 JobQueuing

```
<JobQueuing enabled="true" timeout="1200000"/>
```

Set the enabled attribute to true to enable the job queuing. Enabled Job Queuing is used to not work on the same persistent directory in parallel. The default for *JobQueuing enabled* attribute is false.

The timeout attribute defines the timeout for the queuing in milli seconds. If the timeout is reached the Job is started. The default for timeout is 10 minutes.

3.3.2.1.46 TypeMapping

```
<TypeMapping enabled="true">
```

```
  <V6ToPdm>
```

```
    <Mapping v6Type="VPMReference" pdmType="ItemRevision"/>
```

```
    <Mapping v6Type=" VPMReference" pdmType="Design Revision"/>
```

```
  </V6ToPdm>
```

```
  <PdmToV6>
```

```
    <Mapping v6Type="VPMReference" pdmType="ItemRevision"/>
```

```
    <Mapping v6Type=" VPMReference" pdmType="Design Revision"/>
```

```
  </PdmToV6>
```

```
</TypeMapping>
```

Set the enabled attribute to true to enable the type mapping. Enabled Type Mapping is used to define the Type mapping between 3DEXPERIENCE and Teamcenter.

3.3.2.1.47 Part3DTypeList

```
<Part3DTypeList>
```

```
  <Part3DType>CATPart</Part3DType>
```

```
</Part3DTypeList>
```

List of types which should become Part3D product type, the default is 'CATPart'.

3.3.2.2 Pdm

3.3.2.2.1 Custom Attribute Mapping

```
<CustomAttributeMapping enabled="true">
  <CustomObject      xname="Product"
                    type="ItemRevision"
                    mappingtype="DefaultCustomization">
    <CustomAttribute  xname="Description"
                    name="object_desc"
                    type="string"
                    export="true"
                    import="false" />
    <CustomFormAttributes formtype="ItemRevision Master"
                        relationname="IMAN_master_form_rev">
      <CustomAttribute  xname="Supplier Name"
                      name="user_data_1"
                      type="string"
                      export="true"
                      import="true" />
    </CustomFormAttributes>
  </CustomObject>
</CustomAttributeMapping>
```

Definition of the custom attribute mapping.

Each element defines the *xname* and the *name*.

The *xname* defines the name of the XPDMXML custom property to use.

The *name* defines the name of the Teamcenter property to use.

```
<CustomAttributeMapping>
```

The mapping can be switched on or off using the *enabled* attribute.

It can contain multiple *CustomObject* definitions.

```
<CustomObject>
```

Each object definition can contain multiple *CustomAttribute* and *CustomFormAttributes* definitions.

```
<CustomAttribute>
```

The *type* defines the data type of the property to use.

The direction of the mappings is defined independently by the *import/export* attributes for each *CustomAttribute*. If *import* is "true" the attribute will be imported to Teamcenter. If *export* is "true" the attribute will be exported from Teamcenter.

The optional integer attribute *maxlength* defines the maximum length of the attribute. If the maximum length of the attribute is defined, the *truncate* attribute flag enables the truncate functionality which will truncate the attribute to the maximum length. This is checked if the setting *AttributeCheck* (see chapter 3.3.2.1.3) is enabled.

```
<CustomFormAttributes>
```

The *CustomFormAttributes* tag can be used to refer not the Teamcenter object defined in the *CustomAttribute* but to a *formtype* attached to in with the specified *relationname*.

It can contain multiple *CustomAttribute* definitions.

3.3.2.2.2 MetaUpdate

```
<MetaUpdate enabled="true">
```

```

<MetaObject type="ItemRevision">
  <MetaAttribute name="item_id" export="true" readonly="true"
    v6name="attribute[PLMEntity.PLM_ExternalID]"/>
  <MetaAttribute name="object_desc" export="true" v6name="attribute[PLMEntity.V_description]"/>
  <MetaAttribute name="object_name" export="true" v6name="attribute[PLMEntity.V_Name]"/>
  <MetaFormAttributes formtype="ItemRevision Master" relationname="IMAN_master_form_rev">
    <MetaAttribute name="project_id" export="true" readonly="true"/>
    <MetaAttribute name="user_data_1" export="true" readonly="true"/>
    <MetaAttribute name="user_data_2" export="true" readonly="true"/>
    <MetaAttribute name="user_data_3" export="true" readonly="true"/>
  </MetaFormAttributes>
</MetaObject>
<MetaObject type="Design Revision">
  <MetaAttribute name="item_id" export="true" readonly="true"
    v6name="attribute[PLMEntity.PLM_ExternalID]"/>
  <MetaAttribute name="object_desc" export="true" v6name="attribute[PLMEntity.V_description]"/>
  <MetaAttribute name="object_name" export="true" v6name="attribute[PLMEntity.V_Name]"/>
</MetaObject>
</MetaUpdate>

```

The MetaUpdate section defines the Teamcenter and 3DEXPERIENCE attributes for the metadata update command. The meta update functionality can be switched on or off using the *enabled* attribute.

MetaObject defines the Teamcenter type with the type attribute. The *MetaAttribute* defines the attributes for the update functionality.

- name: the attribute name in Teamcenter.
- export: true to use the Attribute.
- readonly: true to set the attribute value to readonly
- v6name: the 3DEXPERIENCE attribute name

With the *MetaFormAttributes* attached forms with attributes can be used for the meta update. the formtype defines the type of the form and the relationname defines the relation name between the Revision and the Form.

3.3.2.2.3 Configuration settings

Settings for the configuration import in Teamcenter.

```

<Configuration>
  <ModelMapping name="X021">
    <ItemId>X021-config</ItemId>
    <Revision>A</Revision>
  </ModelMapping>
  <ModelMapping name="X120">
    <ItemId>X120-config</ItemId>
    <RevisionRuleUid>QkqJD2AWr9tFBC</RevisionRuleUid>
  </ModelMapping>
  <UpdateModel>true</UpdateModel>
</Configuration>

```

Defines the model mapping from 3DEXPERIENCE to Teamcenter.

The *ModelMapping name* attribute defines the model name from 3DEXPERIENCE.

The Teamcenter Item Revision configuration object can be defined statically with Item id and Revision or dynamically with ItemId and Revision Rule UID. The configuration object is used to store the Variant Rules and Options.

UpdateModel set to true will update the configuration object with the configuration effectivity transfer.

3.3.2.2.4 Other Pdm settings

```
<TemplateProductImport enabled="true">TemplateProduct.CATProduct</TemplateProductImport>
```

The location of the template product file to use on import. The product file will be added on the fly in Teamcenter imports. The location may be relative to the TCI_HOME directory or an absolute path.

The format of the template file to be used must be defined in the V6 to TC file type mapping at /XCISettings/Conversion/V6TcFileType as V6FileFormat.

If the created product is required to get the same status as the parent object, this needs to be configured in /XCISettings/Conversion/StatusUpdateHandling like

```
<AdditionalStatusUpdate      sourceType="F_GenericObj Revision"
                             targetRelationType="IMAN_specification"
                             targetObjectType="CATProduct" />
```

```
<ReallyRemoveExistingNotProvided enabled="true" />
```

Setting whether to remove unknown occurrences in Teamcenter or not.

Default setting is "false".

```
<OverwriteOriginal enabled="true" />
```

Set *enabled* to "true" to allow overwriting of data originating from Teamcenter (after CLOC).

Default setting is "false".

```
<FileUploadChunkSize>1</FileUploadChunkSize>
```

```
<FileDownloadChunkSize>1</FileDownloadChunkSize>
```

Optional definition of the chunk sizes to be used to up- and download files using the Teamcenter FCS.

The default settings are "1" each.

```
<GetPropertiesChunkSize>1000</GetPropertiesChunkSize>
```

```
<ExpandChunkSize>1000</ExpandChunkSize>
```

```
<RefreshChunkSize>1000</RefreshChunkSize>
```

Optional definition of the maximal chunk sizes to use when requesting metadata from the Teamcenter server.

The default settings are "1000" each.

Warning: Modifying these settings can affect the performance of the tool and the utilization of the Teamcenter server.

```
<DocumentRelations>
```

```
    <Relation>IMAN_specification</Relation>
```

```
    <Relation>IMAN_Rendering</Relation>
```

```
</DocumentRelations>
```

Defines the relation types to be followed to documents when the export functionality of TCI is used.

```
<CreatePartClass>Item</CreatePartClass>
```

Name of the Teamcenter Item type to use.

The default class is "Item". This behavior can be changed by overwriting the *com.tsystems.xci.customization.CustomPartType* class.

```
<CreateFastenerPartClass>WeldPoint</CreateFastenerPartClass>
```

Name of the Teamcenter Item type to use for Fastener items.

The default is "WeldPoint". This behavior can be changed by overwriting the *com.tsystems.xci.customization.CustomItemType* class.

```
<LinkedDrawingHandling enabled="true">
```

```
    <LinkedDrawingDocumentType>CATDrawing</LinkedDrawingDocumentType>
```

```
    <LinkedDrawingDocumentRelationType>IMAN_external_object_link</LinkedDrawingDocu  
mentRelationType>
```

```
</LinkedDrawingHandling>
```

Defines a list of Teamcenter drawing Document types which should be searched as referenced at Item Revisions. The TCIC integration uses links for the drawing handling in Teamcenter. If the *LinkedDrawingHandling* is enabled the integration searches for referenced drawings and transfers these drawings to 3DEXPERIENCE.

Default setting is "false".

```
<LinkedRevisionHandling enabled="true">
```

```
    <LinkType>IMAN_external_object_link</LinkType>
```

```
</LinkedRevisionHandling>
```

Defines a list of Teamcenter link types which should be used to search for referenced Item Revisions related to Documents. The TCIC integration uses links for the drawing handling in Teamcenter. If the *LinkedRevisionHandling* is enabled the integration searches for referenced Item Revisions and transfers these Item Revisions to 3DEXPERIENCE.

Default setting is "false".

```
<Dispatchers>
```

```
    <Dispatcher enabled="true">
```

```
        <DocumentType>CMI2Part</DocumentType>
```

```
        <FileType>CATPart</FileType>
```

```
        <Provider>TSYSTEMS</Provider>
```

```
        <Priority>3</Priority>
```

```
        <Servicename>cmtojt</Servicename>
```

```
        <Type>ONDEMAND</Type>
```

```
    </Dispatcher>
```

```
    <Dispatcher enabled="true">
```

```
        <DocumentType>CMI2Drawing</DocumentType>
```

```
        <FileType>CATDrawing</FileType>
```

```
        <Provider>TSYSTEMS</Provider>
```

```
        <Priority>3</Priority>
```

```

        <Servicename>cmitopdf</Servicename>
        <Type>ONDEMAND</Type>
    </Dispatcher>
</Dispatchers>

```

Definitions for optional dispatchers to use. Each dispatcher can be enabled separately.

```

<RevisionQuerySettings>
    <RevisionTypes>
        <!-- Use empty RevisionType for search all types. -->
        <RevisionType/>
        <RevisionType>ItemRevision</RevisionType>
        <RevisionType>Design Revision</RevisionType>
        <RevisionType>Part Revision</RevisionType>
    </RevisionTypes>
    <!-- The RevisionAttributeName must be the "User Entry Name" in the Query definition -->
    <!-- of the Teamcenter Query Builder application. -->
    <!-- for the item_id attribute e.g.: "Item ID" -->
    <RevisionAttributeNames>
        <RevisionAttributeName display="Item ID" >Item ID</RevisionAttributeName>
        <RevisionAttributeName display="Item Revision" >Revision</RevisionAttributeName>
        <RevisionAttributeName display="Name" >Name</RevisionAttributeName>
        <RevisionAttributeName display="Description" >Description</RevisionAttributeName>
    </RevisionAttributeNames>
    <!-- if ResultAttributeNames tag does not exist, then all not empty attributes are returned. -->
    <ResultAttributeNames>
        <ResultAttributeName>item_id</ResultAttributeName>
        <ResultAttributeName>item_revision_id</ResultAttributeName>
        <ResultAttributeName>sequence_id</ResultAttributeName>
        <ResultAttributeName>creation_date</ResultAttributeName>
        <ResultAttributeName>owning_user</ResultAttributeName>
        <ResultAttributeName>owning_group</ResultAttributeName>
        <ResultAttributeName>last_mod_user</ResultAttributeName>
        <ResultAttributeName>last_mod_date</ResultAttributeName>
        <ResultAttributeName>checked_out_user</ResultAttributeName>
    </ResultAttributeNames>
    <MaxResultToReturn>25</MaxResultToReturn>
</RevisionQuerySettings>

```

RevisionTypes defines the settings for the Teamcenter Item Query.

Use empty *RevisionType* for search all types.

The *RevisionAttributeName* must be the “User Entry Name” in the Query definition of the Teamcenter Query Builder application.

Example:

The “*item_id*” attribute “Item ID”

If the *ResultAttributeNames* tag does not exist, then all not empty attributes are returned.

MaxResultToReturn sets a specified maximum number of matches to be returned. It has default “0”, which means no limit.

```

<GetMetadataSettings>
    <!-- used as default for all ItemRevision with subclasses -->
    <ResultAttributeNames pdmType="ItemRevision">
        <ResultAttributeName>item_id</ResultAttributeName>
        <ResultAttributeName>item_revision_id</ResultAttributeName>
        <ResultAttributeName>creation_date</ResultAttributeName>
    </ResultAttributeNames>

```

```

        <ResultAttributeName>last_mod_date</ResultAttributeName>
        <ResultAttributeName>object_type</ResultAttributeName>
        <ResultAttributeName>object_name</ResultAttributeName>
        <ResultAttributeName>object_desc</ResultAttributeName>
        <ResultAttributeName>owning_user</ResultAttributeName>
        <ResultAttributeName>owning_group</ResultAttributeName>
        <ResultAttributeName>owning_site</ResultAttributeName>
    </ResultAttributeNames>
    <!-- used as default for all Document with subclasses -->
    <ResultAttributeNames pdmType="Dataset">
        <ResultAttributeName>creation_date</ResultAttributeName>
        <ResultAttributeName>last_mod_date</ResultAttributeName>
        <ResultAttributeName>object_type</ResultAttributeName>
        <ResultAttributeName>object_name</ResultAttributeName>
        <ResultAttributeName>object_desc</ResultAttributeName>
        <ResultAttributeName>owning_user</ResultAttributeName>
        <ResultAttributeName>owning_group</ResultAttributeName>
        <ResultAttributeName>owning_site</ResultAttributeName>
    </ResultAttributeNames>
    <!-- used for CMI2Part class -->
    <ResultAttributeNames pdmType="CMI2Part">
        <ResultAttributeName>last_mod_date</ResultAttributeName>
        <ResultAttributeName>object_name</ResultAttributeName>
        <ResultAttributeName>object_desc</ResultAttributeName>
        <ResultAttributeName>owning_user</ResultAttributeName>
        <ResultAttributeName>owning_group</ResultAttributeName>
    </ResultAttributeNames>
</GetMetadataSettings>

```

GetMetadataSettings defines the attributes which are returned from the Show Teamcenter Attributes command in the TCI 3DEXPERIENCE Rich Client.

```
<SendJobNotifications enabled="true"/>
```

If the *SendJobNotifications* is enabled, the User receives a Message in the Teamcenter Mail system after the Job is finished.

```
<ExportWithStateFilter enabled="true">Frozen,Released</ExportWithStateFilter>
```

If enabled only objects with the configured state are exported from Teamcenter. The value is a comma separated list of allowed states.

```
<HoldConnectionOpenInSeconds>60</HoldConnectionOpenInSeconds>
```

Seconds to keep the Teamcenter service connection open while waiting for new service connection request. The default value is 60.

3.3.2.3 Teamcenter

In the following chapters the configuration options for the tag *Teamcenter* are described.

3.3.2.3.1 Teamcenter Server definitions

```

<Server>
    <Url>http://my.tc-server.url:8080/tc</Url>

```

```

<Username>myTCIUser</Username>
<Password plainText="true">myTCIPassword</Password>
<Group></Group>
<Role></Role>
</Server>

```

Definition of the Teamcenter server and the login credentials of the TCI user.

The *Username* and the *Password* belong to an existing Teamcenter user. You can also specify the *Group* and *Role* in which the user will act. An optional element is *Locale* to define the required locale for the user. Another optional element is *UseBypass*, set it to *true* to set the bypass to the user. The element *WaitForWarmServer* defines the time to wait for a warming server in ms, the default value is 5000.

3.3.2.3.2 Server Password

The password in the `XCISettings.xml` (`/XCISettings/Teamcenter/Server/Password`) can be stored as plain text or encrypted.

```
<Password plainText="true">myTCIPassword</Password>
```

To encrypt the password for TCI the following script can be used:

```

set XCI_HOME=C:\XCI\XCI_HOME
set WEBAPPS_FOLDER=C:\XCI\apache-tomcat-8.5.50\webapps
set WEB_APP_NAME=XCI

set JAVA_HOME= C:\Program Files\Eclipse Adoptium\jdk-11.0.14.101-hotspot
set JDK_JAVA_OPTIONS=%JDK_JAVA_OPTIONS% -Djlicman.platform="Windows_2003_amd64"
set
CLASSPATH=D:\TC\TC14\soa_client\java\libs\*;D:\TC\TC14\soa_client\java\libs\com.
teamcenter.rac.external_14000.0.0\*;%WEBAPPS_FOLDER%\%WEB_APP_NAME%\WEB-
INF\lib\*;%WEBAPPS_FOLDER%\%WEB_APP_NAME%\WEB-INF\classes

"%JAVA_HOME%\bin\java.exe" com.tsystems.xci.Main --encryptPassword

pause

```

TCI will prompt the user to enter the password. The password will only be written out to the standard output and must be copied to the configuration file manually.

The command will generate a file named `passwordKey` and the encrypted password, that is printed to the command line.

Note:

If the `passwordKey` file exists it will not be overwritten.

The encrypted password may differ after each execution of the encryption. It can be set as follows.

```
<Password plainText="false">INdlaJZMaTQO0MbIX+/C1Q==</Password>
```

3.3.2.3.3 Teamcenter SessionPool settings

```

<SessionPool enabled="true">
  <Login enabled="false" />
  <DiscardOnFailedLogin enabled="false" />
  <Logout enabled="false" />

```

```

<!-- 60 min session timeout (3600000) -->
<DiscardIdle enabled="true">3600000</DiscardIdle>
<DiscardUsed enabled="false">100</DiscardUsed>
</SessionPool>

```

Defines the Session Pool handling. The session pool holds connections to Teamcenter open and uses this connection to login and logout with the Teamcenter Server.

- Sessions are created as needed.
- If *Login* is not enabled logins will only be issued on new created connections, but not on previously suspended connections. The default setting is “true”.
- If *Logout* is not enabled logouts without discarding the session are suppressed. The default setting is “true”.
- If *DiscardOnFailedLogin* is enabled connections will be discarded when a TC session login fails on them otherwise not. The default setting is “true”.
- When a new session (using the same server, user, group and role) is needed the dormant connection will be reused.
- If *DiscardIdle* is enabled a cyclic check will be executed to log out sessions that are idle for the timeout defined in the setting. The default setting is “false”.
- If *DiscardUsed* is enabled connection will be discarded after the defined number of virtual TC sessions has used the connection. The default setting is “false”.

3.3.2.3.4 Teamcenter FileManagement settings

```

<FileManagement useFsc="true">
  <!-- ClientIPAddress is empty -->
  <AssignedFSCURLs>http://fscHost:fsc-port</AssignedFSCURLs>
  <!-- BootstrapFSCURLs is empty -->
</FileManagement>

```

If the useFsc is set to true, the tccs is not used, but the direct connection to the fsc is used.

Define FileManagementUtility to use with parameters:

- ClientIPAddress: This client's address which can be optionally used to determine the FSC assignments.
- AssignedFSCURLs: Optional array of FSCs assigned to this client. These are passed in the form {"http://192.168.1.1:1234", "http://192.168.1.2:1234"}. These are configured in fmsmaster.xml as fscid and clientmap.
- BootstrapFSCURLs: An array of bootstrap FSCs to get FSC assignments from. These are passed in the form {"http://192.168.1.1:1234", "http://192.168.1.2:1234"}. These are set as values for the preference FMS_Bootstrap_Urls and can be listed by running the command line utility backup_xmlinfo.

This initialization can be a direct assignment of assigned FSCs URIs, or via a bootstrap procedure that queries the FMS system to find assigned FSCs based on the supplied client IP. Direct initialization is invoked by passing assignedFSCURLs. The FMS system is not queried for assigned FSCs. Bootstrap initialization is invoked by passing bootstrapFSCURLs and clientIPAddress. The bootstrap FSCs will be queried to get assigned FSCs for the given client IP. If the client IP is null or an empty string, the bootstrap servers will use the client address off the connection. Assigned FSCs are kept in the proxy and used by default on all other APIs. Optionally, specific FSCs to be used for a given API call by passing them in fscServerURLs.

3.3.2.3.5 Other Teamcenter settings

`<WorkingGroup>V6Group</WorkingGroup>`

Name of TCI working group in Teamcenter. Item Revisions owned by 3DEXPERIENCE will be moved to this group.

`<MinimizeLoadProperties enabled="true" />`

Set *enabled* to “true” to aggressively minimize loadProperties calls.

Default setting is “false”.

`<ReportReceiverList enabled="false">`

`<Receiver>myTCIUser1</Receiver>`

`<Receiver>infodba</Receiver>`

`</ReportReceiverList>`

Defines a list of Teamcenter users to receive reports on TCI actions. The reports will be delivered through Teamcenter to the mailbox of the defined users. The dataset type and the named reference for the report Document can be configured with the following settings.

Default setting is “true”.

`<ReportDatasetType>Text</ReportDatasetType>`

`<ReportDatasetNamedRef>Text</ReportDatasetNamedRef>`

Defines the dataset type to be used for the report functionality.

Default settings are “Text” each.

`<ExportDatasetType>Text</ExportDatasetType>`

`<ExportDatasetNamedRef>Text</ExportDatasetNamedRef>`

Defines the dataset type to be used for the export functionality.

Default settings are “Text” each.

The Teamcenter policy can be loaded by Server policy or a local file path.

`<PolicyPath>TCI_Policy</PolicyPath>`

Optional definition of the Teamcenter server policy to load.

`<PolicyLocalPath>C:\TCI\TCI_PolicyFile.xml</PolicyLocalPath>`

Optional local file definition for the Teamcenter policy to load.

`<LatestRevisionRuleUid>da12b3d4ef54gt</LatestRevisionRuleUid>`

The revision rule uid used to get the latest Revision.

3.3.2.3.6 TcIC compatibility

To support as most as possible environments TCI can be configured to run in TcIC compatibility mode. This will modify the default behavior to match some specialties of the environment.

To switch on the TcIC compatibility mode the following configurations must be set in the TCI configuration file in the Teamcenter section.

```
<Teamcenter>
...
<TcICCompatibility enabled="true"/>
...
</Teamcenter>
```

Additionally, the following optional settings can be set:

- OccurrenceProperty: default is "bl_occurrence_name"
- OccurrenceNote: default is "catiaOccurrenceName"
- BomLineOccurrenceProperty: default is "catiaOccurrenceName"
- BomViewRevisionType: default is "catia"

3.3.2.3.7 CMI RII compatibility

To support as most as possible environments TCI can be configured to run in CMI RII compatibility mode. This will modify the default behavior to match some specialties of the environment.

To switch on the TcIC compatibility mode the following configurations must be set in the TCI configuration file in the Teamcenter section.

```
<Teamcenter>
...
< CMIRIICompatibilityenabled="true"/>
...
</Teamcenter>
```

Additionally, the following optional settings can be set:

- HandleAuxForms: true to handle aux files for CMI RII, default is true

3.3.2.3.8 ConfigurationImport

Teamcenter Configuration Import settings.

```
<ConfigurationImport>
  <ConfigurationCreateItemtype>Item</ConfigurationCreateItemtype>
  <RemoveExistingOptionValues>>false</RemoveExistingOptionValues>
  <VariantRuleRelationType>IMAN_specification</VariantRuleRelationType>
  <RevisionRuleForVariants>rev-rule-uid</RevisionRuleForVariants>
  <RemoveOldVariantRule>true</RemoveOldVariantRule>
  <DeleteOldVariantRule>>false</DeleteOldVariantRule>
  <SkipRemoveUnneededBrackets>>false</RemoveExistingOptionValues>
  <OccurrenceEffectivityStartDateINF>1970-01-01</OccurrenceEffectivityStartDateINF>
  <OccurrenceEffectivityTimeZone>MET</OccurrenceEffectivityTimeZone>
</ConfigurationImport>
```

Settings for the Option and Variant Rule import.

ConfigurationCreateItemtype: the Item type to use for the creation of new Item configuration objects. Default is "Item"

RemoveExistingOptionValues :true to remove existence option values, default is false.

VariantRuleRelationType: :the variant rule relation type, default is IMAN_specification.

RevisionRuleForVariants :the Revision rule uid to use for option update.

RemoveOldVariantRule :true to remove old variant rules from the configuration object, default is true.

DeleteOldVariantRule :true to delete old variant rules, default is false.

SkipRemoveUnneedeBrackets: true to skip the removeUnneedeBrackets functionality, default is false

Settings for the Date Effectivity import:

OccurrenceEffectivityStartDateINF: the start date for INF values from 3DEXPERIENCE, default is 1970-01-01.

OccurrenceEffectivityTimeZone: the ID for a TimeZone, either an abbreviation such as "PST", a full name such as "America/Los_Angeles", or a customID such as "GMT-8:00".

3.3.2.4 Enovia

In the following chapters the configuration options for the tag *Enovia* are described.

3.3.2.4.1 3DEXPERIENCE Server definition

The 3DEXPERIENCE connection is defined in the *Server* section.

```
<Server>
  <Url>https://enovia-server.url:port/3dspace</Url>
  <Username>user</Username>
  <Password>XXX</Password>
  <Role>ctx::VPLMAdmin.Company Name.Default</Role>
  <Vault>vp1m</Vault>
  <Use3DPassport>true</Use3DPassport>
</Server>
```

Definition of the 3DEXPERIENCE server URL and the login credentials of the TCI user.

The *Username* and the *Password* belong to an existing 3DEXPERIENCE user. You can also specify the *Role* and the *Vault*. Set *Use3DPassport*, if the login uses the 3DPassport service.

The encryption of the password is described in section Server Password in chapter 3.3.2.3.2.

3.3.2.4.2 3DEXPERIENCE TDXServer definition

The 3DEXPERIENCE Rest connection is defined in the *TDXServer* section.

```
<TDXServer>
  <ExchangeUrl></ExchangeUrl>
  <SpaceUrl>url to the 3dspace</SpaceUrl>
  <PassportUrl>url to the 3dpassport</PassportUrl>
  <Username>username</Username>
  <Password>encrypted password</Password>
  <SecurityContext>VPLMProjectLeader.Company Name.Common
Space</SecurityContext>
  <Tenant>OnPremise</Tenant>
  <Language>en</Language>
  <SessionTimeout enabled="true">30</SessionTimeout>
</TDXServer>
```

Definition of the 3DEXPERIENCE server for the Rest API.

The *Username* and the *Password* belong to an existing 3DEXPERIENCE user.

The encryption of the password is described in section Server Password in chapter 3.3.2.3.2.

The *SecurityContext* defines the security context to use.

The *Tenant* defines the tenant.

The *Language* defines the ISO code of the language, default is “en”, used to get translated messages from 3DEXPERIENCE.

The *SessionTimeout* defines the session timeout of the 3DEXPERIENCE session, used to renew the session if enabled.

3.3.2.4.3 General 3DEXPERIENCE settings

```
<FileCache enabled="true">
  <XciFcUrl>http://my.tci-integration-server.url:port/XCI_FC</XciFcUrl>
</FileCache>
```

Is only used if the *TDXExportMode* is set to “ExportFiles”.

Defines the File Cache URL used to cache files for the export files mode.

Default setting is “false”.

```
<MappingContextName>XPDM</MappingContextName>
```

The mapping context name to use, used to find the correct mapping in 3DEXPERIENCE.

```
<ReceiveInterval>4000</ReceiveInterval>
```

Optional definition in which interval the events should be received in milliseconds (ms).

Default setting is “5000” (5 seconds).

```
<SchemaPath>...resources\xsd\XPG\XPDMXML.xsd</SchemaPath>
```

Definition of the schema to be used to validate XPDM messages. If the file path is not defined or incorrect, the incoming and outgoing XPDMXML files will not be validated but processed.

```
<Customization>DefaultCustomization</Customization>
```

Definition of the customization to use in XPDM events. This customization must be defined in the `pdm-cust-config.xml` in the 3DEXPERIENCE installation.

The **`com.tsystems.xci.customization.CustomTypeMapping`** customization class can overwrite this setting.

```
<GetMetadataSettings>
  <ProductObject enoviaType="VPMReference">
    <AttributeName display="Type">type</AttributeName>
    <AttributeName display="Name">name</AttributeName>
    <AttributeName display="Revision">revision</AttributeName>
    <AttributeName display="Vault">vault</AttributeName>
    <AttributeName display="Policy">policy</AttributeName>
    <AttributeName display="State">current</AttributeName>
    <AttributeName display="Created">originated</AttributeName>
  </ProductObject>
</GetMetadataSettings>
```

```

    <AttributeName display="Modified">modified</AttributeName>
    <AttributeName display="Owner">owner</AttributeName>
    <AttributeName display="Organization">organization</AttributeName>
    <AttributeName display="Project">project</AttributeName>
    <AttributeName display="External
ID">attribute[PLMEntity.PLM_ExternalID]</AttributeName>
    <AttributeName display="Title">attribute[PLMEntity.V_Name]</AttributeName>
    <AttributeName display="">attribute[PLMEntity.V_description]</AttributeName>
  </ProductObject>
</GetMetadataSettings>

```

GetMetadataSettings defines the attributes which are returned from the “Show 3DEXPERIENCE Properties” command in the TCI Teamcenter Rich Client.

```
<EnableNonCatiaExpand>false</EnableNonCatiaExpand>
```

Is only relevant if the *TDXExportMode* is set to “ExportFiles”.

If set to “true” all geometries are exported, else only 3DPart geometries are exported.

Default setting is “false”.

```
<VPMReferenceDisplayPattern>{attribute[PLMEntity.PLM_ExternalID]}
{majorrevision}</VPMReferenceDisplayPattern>
```

Display pattern for VPMReferences (Physical Products).

Default setting is “{attribute[PLMEntity.PLM_ExternalID]} {revision}
{attribute[PLMEntity.V_Name]}”.

```
<DocumentDisplayPattern>{name} {revision}</VPMReferenceDisplayPattern>
```

Display pattern for documents.

Default setting is “{name} {revision}”.

```
<FolderDisplayPattern>{attribute[PLMEntity.PLM_ExternalID]}</FolderDisplayPattern>
```

Display pattern for Folder.

Default setting is “{attribute[PLMEntity.PLM_ExternalID]}”.

```
<RootFolderDisplayPattern>{attribute[PLMEntity.PLM_ExternalID]}</RootFolderDisplayPattern>
```

Display pattern for Root Folder.

Default setting is “{attribute[PLMEntity.PLM_ExternalID]}”.

```
<FolderConnectionDisplayPattern>{attribute[PLMEntity.PLM_ExternalID]}</FolderConnectionDispl
ayPattern>
```

Display pattern for FolderConnections.

Default setting is “{attribute[PLMEntity.PLM_ExternalID]}”.

```
<BookmarkDisplayPattern>{name}</BookmarkDisplayPattern>
```

Display pattern for Bookmark.

Default setting is “{name}”.

<RootBookmarkDisplayPattern>{name}</RootBookmarkDisplayPattern>

Display pattern for Root Bookmark.

Default setting is "{name}".

<ConfigurationModelDisplayPattern>{name} {attribute[Marketing Name]}</ConfigurationModelDisplayPattern>

Display pattern for Configuration Model.

Default setting is "{name} {attribute[Marketing Name]}".

<ConfigurationModelVersionDisplayPattern>{name} {attribute[Marketing Name]} {revision}</ConfigurationModelVersionDisplayPattern>

Display pattern for Configuration Model Version.

Default setting is "{name} {attribute[Marketing Name]} {revision}".

<ChildObjectExpandPattern>VPMReference</ChildObjectExpandPattern>

Optional expand pattern for child part objects. Comma separated list of types.

Default setting is "VPMReference".

<ChildRelationExpandPattern>VPMInstance</ChildRelationExpandPattern>

Optional expand pattern for child relations. Comma separated list of relation types.

Default setting is "VPMInstance".

<RepObjectExpandPattern>VPMRepReference</RepObjectExpandPattern>

Optional expand pattern for representation objects. Comma separated list of types.

Default setting is "VPMRepReference".

<RepRelationExpandPattern>VPMRepInstance</RepRelationExpandPattern>

Optional expand pattern for representation relations. Comma separated list of relation types.

Default setting is "VPMRepInstance".

<CatiaV5ExportVersion>V5R28</CatiaV5ExportVersion>

The CATIA V5 version used to store the info in Teamcenter.

<UsePowerByImport>>false</UsePowerByImport>

Enable to activate 3DEXPERIENCE import in PowerBy mode. Data will be imported in native V5 format into 3DEXPERIENCE and can then be loaded using the Dassault PowerBy Integration of 3DEXPERIENCE and V5.

Default is false, i.e. data will be imported in V6 mode.

`<ExportWithStateFilter enabled="true">FROZEN,RELEASED</ExportWithStateFilter>`

If enabled only objects with the configured state are exported from 3DEXPERIENCE. The value is a comma separated list of allowed states.

`<RemoveNon3DPartRep3D>false</RemoveNon3DPartRep3D>`

True to remove Rep3D/Rep3DInst and Rep3DAggr from the xpdm export which are not connected with a 3DPart.

`<UseBookmark>true</UseBookmark>`

True to use Bookmark class for Folder functionality. Default is false.

`<UseBookmarkRestApi>true</UseBookmarkRestApi>`

True to use the Bookmark Rest API for bookmark import (UseBookmark must be true). Default is false.

`<EnableEnoauthoringApi>true</EnableEnoauthoringApi>`

True to use the enoauthoring Api. Default is true.

`<HoldConnectionOpenInSeconds>60</HoldConnectionOpenInSeconds>`

Seconds to keep the 3DEXPERIENCE service connection open while waiting for new service connection request. The default value is 60.

`<RestApiUseOneSearchField>true</RestApiUseOneSearchField>`

True to use only one untyped search field for the 3DEXP search in the web client.

3.3.2.4.4 3DEXPERIENCE Rest meta definition

The *EnoviaRestMeta* setting is used to overwrite defaults used by the 3DEXPERIENCE rest api and to describe the 3DEXPERIENCE datamodel.

`<EnoviaRestMeta>`

`<MetaObject superName="VPMReference">NewType1,NewType2</MetaObject>`

`<CadOriginExtensionMapping cadOrigin="CATIAV5">CATProduct</CadOriginExtensionMapping>`

`...`

`</EnoviaRestMeta>`

MetaObject: define Supertype - SubtypeList (comma separated list).

CadOriginExtensionMapping: mapping from cad origin to assembly file extension.

DocTypeExtensionMapping: mapping from document type to assembly file extension.

TDDesignTypes: Design types separated by comma. Default is VPMReference.

TDPartRepresentationTypes: Geometric Representation types separated by comma. Default is 3DShape.

TDPartRepRelation: Relation name for Geometric Representation types. Default is VPMRepInstance.

TDDrawingRepresentationTypes: Drawing Representation types separated by comma. Default is Drawing.

TDDrawingRepRelation: Relation name for Drawing Representation types. Default is VPMRepInstance.

TDDocumentRepresentationTypes: Document Representation types separated by comma. Default is Document.

TDDocumentRepRelation: Relation name for Document Representation types. Default is PLMDocConnection.

TDXCADProductRepresentationTypes: Document Representation types separated by comma. Default is XCADAAssemblyRepReference.

TDXCADProductRepRelation: Relation name for Document Representation types. Default is XCADAAssemblyRepInstance.

3.3.2.4.5 SecurityContext translation definition

The Teamcenter client provides a 3DEXPERIENCE login enhancement to select a security context in 3DEXPERIENCE based on Role, Organization, and Collaborative space. The display values for Role, Organization and CollaborativeSpace can be configured.

```
<SecurityContextTranslation>
  <Role name="VPLMAdmin" display="Administrator"/>
  <Role name="VPLMCreator" display="Author"/>
  <Role name="VPLMExperimenter" display="Contributor"/>
  <Role name="VPLMProjectAdministrator" display="Owner"/>
  <Role name="VPLMProjectLeader" display="Leader"/>
  <Role name="VPLMViewer" display="Reader"/>
  <Role name="VPLMSecuredCrossAccess" display="Public Reader"/>
  <Role name="VPLMAdmin" display="Administrator"/>
</SecurityContextTranslation>
```

3.3.2.4.6 3DEXPERIENCE Query definition

The TCI integration inside Teamcenter provides an online query in 3DEXPERIENCE without changing the application. Based on the query result a data transfer from 3DEXPERIENCE to Teamcenter can be initiated. For the configuration of the data transfer please refer to chapter 3.3.2.4.7.

The corresponding configurations for the query in 3DEXPERIENCE are defined in the *QuerySettings* section.

```
<QuerySettings>
  <DefaultEnoviaRole>VPLMCreator</DefaultEnoviaRole>
  <DefaultEnoviaVault>vplm</DefaultEnoviaVault>
  <QueryLimit>200</QueryLimit>
  <QueryTypes>
    <QueryType display="Physical Product">VPMReference</QueryType>
  </QueryTypes>
  <QueryAttributes>
    <QueryAttribute display="Identification code" visible="true">id</QueryAttribute>
    <QueryAttribute display="Type" visible="true">type</QueryAttribute>
    <QueryAttribute display="Name" visible="true">name</QueryAttribute>
    <QueryAttribute display="Revision" visible="true">revision</QueryAttribute>
    <QueryAttribute display="Vault" visible="true">vault</QueryAttribute>
    <QueryAttribute display="Policy" visible="true">policy</QueryAttribute>
  </QueryAttributes>
</QuerySettings>
```

```

<QueryAttribute display="Current State" visible="true">current</QueryAttribute>
<QueryAttribute display="Originated" visible="true">originated</QueryAttribute>
<QueryAttribute display="Modified" visible="true">modified</QueryAttribute>
<QueryAttribute display="Owner" visible="true">owner</QueryAttribute>
<QueryAttribute display="Organization" visible="true">organization</QueryAttribute>
<QueryAttribute display="Project" visible="true">project</QueryAttribute>
<QueryAttribute display="Major Revision" visible="true">majorrevision</QueryAttribute>
<QueryAttribute display="Minor Revision" visible="true">minorrevision</QueryAttribute>
<QueryAttribute display="ExternalID" visible="true">
    attribute[PLMEntity.PLM_ExternalID]</QueryAttribute>
<QueryAttribute display="V_Name" visible="true">
    attribute[PLMEntity.V_Name]</QueryAttribute>
<QueryAttribute display="V_description" visible="true">
    attribute[PLMEntity.V_description]</QueryAttribute>
</QueryAttributes>
</QuerySettings>

```

DefaultEnoviaRole and the *DefaultEnoviaVault* are used as defaults for the 3DEXPERIENCE login. The configured values are presented in the 3DEXPERIENCE login dialog window and can be modified by the user. If no default values are configured, empty input fields are presented to the user.

QueryLimit defines the maximum number of query results presented to the user. If more matching objects are available in 3DEXPERIENCE, an information message will appear inside the user interface.

The default setting is “100”.

QueryTypes defines a list of selectable object types for the 3DEXPERIENCE query. Each *QueryType* defines one 3DEXPERIENCE object type (3DEXPERIENCE internal type name). The *display* attribute defines the type name presented to the user. If no query type is configured, an empty input field is presented to the user. In this case, the user has to input the 3DEXPERIENCE internal type name, like “VPMReference”.

QueryAttributes defines the 3DEXPERIENCE attributes, which will be presented in the result table. The order of the attributes in the result table is also defined here and corresponds to the attribute sequence. Each *QueryAttribute* defines one 3DEXPERIENCE attribute, e.g. “majorrevision”. The *display* attribute defines a corresponding name used in the results window, e.g. “Major Revision”. If the *visible* attribute is set to “false”, the 3DEXPERIENCE attribute will not be visible inside the result window. The default for the *visible* attribute is “true”. If no query attributes are configured, a list of default attributes is used.

Each line in the result window represents one 3DEXPERIENCE object. The user can select each line and initiate the data transfer from 3DEXPERIENCE to Teamcenter. To perform the transfer, the configured *TDXExportMode* will be used. See chapter 3.3.2.1.25 for detailed information.

3.3.2.4.7 Export and Import Definitions

The following tags are used in the import and export definitions below:

- *CatStartPath* defines the path to the batch tool CATSTART.exe.
- *CatStartDirEnv* defines the directory, where the CATSTART environment is located.
- *CatStartEnv* defines the CATSTART environment.
- *ServerUrl* defines the 3DEXPERIENCE server URL.

- It is mandatory to include the port in the URL. :443 for https and :80 for http if you did not choose a different port.
- *Environment* defines the 3DEXPERIENCE environment.
- *Username* defines the 3DEXPERIENCE user name, used to initiate the data transfer.
- *Password* defines the 3DEXPERIENCE user password for the 3DEXPERIENCE user.
- *FileFormat2D* defines the 2D export file format.
- *FileFormat3D* defines the 3D export file format.
- *GeometryType3D* defines the 3D type of geometry.
- *SecurityCtx* defines the 3DEXPERIENCE security context (Role.Organization.Project).
- *Siteld* defines PLM Mapping Context for the target site.
- *WithFiles* used for XPDMExport:
 - Yes (default): Export files with XPDMExport.
 - No: do not export files with the XPDMExport (use FileExportConfiguration).
 - IfModified: only export Modified Files. (Missing files are exported based on the FileExportConfiguration)
- *WithDocuments* used for XPDMExport:
 - Yes (default): Export non cad documents with XPDMExport.
 - No: do not export non cad documents with the XPDMExport.
- *WithPLMParams* used for XPDMExport:
 - Yes (default): Export PLM Parameter with XPDMExport.
 - No: do not export PLMParameter with the XPDMExport.
- *MappingInfoResult* used for mapping info export:
 - All (default): Export mapping info result to one file.
 - Each: one result file for each mapping info entry in the input file.
- *MappingInfoExposed* used for mapping info export.
 - TRUE (default): export only exposed mapping.
 - FALSE: export exposed and internal mapping.

The following attributes are used for the processing definitions:

- *usecs*: Set to “true” to use the Converter Server.
- *tdsUrl*: TCI directory service URL (http://my.tci-integration-server.url:port/XCI/XCI_TDS).
- *csTimeout*: Converter Server timeout in seconds used to wait for free Converter Server host. Default setting is “7200”.
- *resource*: Name of the resource (see chapter 3.3.2.1.37).

The following tags are used in the Host definition:

- *Url*: The URL to the processing application.
- *Command*: The command used on the processing host (see *Url*).

Optional tags are:

- *Timeout*: The timeout in seconds. Default setting is “7200”.
- *MaxParallel*: The maximum number of parallel conversions running on the host.

The following attributes are used for the host definitions:

- *local*: Set to “true” will skip the file transfer via Converter Server and directly work in the persistent directory (must be accessible from the hosts). Default setting is “false”.
- *cleanupWorkdir*: Set to “true” will clean the Converter Server work directory after result files have been transferred to TCI. Default setting is “true”.

The *TDXExportMode* defines the 3DEXPERIENCE export mode; the *TDXImportMode* defines the 3DEXPERIENCE import mode.

In the following sections export and import definitions are described.

3.3.2.4.7.1 SetFilter definition

Set Filter in 3DEXPERIENCE using the 3DEXPERIENCE Batch utility.

```
<SetFilter>
  <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
  <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
  <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password>XXX</Password>
</Cloc >
```

Set Filter without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```
<SetFilterProcessingusecs="true" tdsUrl="http://my.tci-integration-server.url:port/XCI/XCI_TDS">
  <SetFilterHostlocal="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>XPDMExportCommand</Command>
  </SetFilterHost>
  <SetFilterCommandcommandName="XPDMExportCommand">
    <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
  </SetFilterCommand>
</SetFilterProcessing>
```

Set Filter with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.2 ClocProcessing definition

Process CLOC in 3DEXPERIENCE using the 3DEXPERIENCE Batch utility.

```
<Cloc >
  <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
  <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
  <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password>XXX</Password>
  <ContextName>XPDM</ContextName>
</Cloc >
```

Process CLOC without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```

<ClocProcessing usecs="true" tdsUrl="http://my.tci-integration-server.url:port/XCI/XCI_TDS">
  <ClocHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>XPDMExportCommand</Command>
  </ClocHost >
  <ClocCommand commandName="XPDMExportCommand">
    <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
    <ContextName>XPDM</ContextName>
  </ClocCommand >
</ClocProcessing >

```

Process CLOC with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.3 MappingInfo definition

Retrieve Mapping information from 3DEXPERIENCE using the 3DEXPERIENCE Batch utility.

```

<MappingInfo>
  <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
  <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
  <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password>XXX</Password>
  <ContextName>XPDM</ContextName>
</MappingInfo >

```

Retrieve Mapping information without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```

<MappingInfoProcessing usecs="true" tdsUrl="http://my.tci-integration-
server.url:port/XCI/XCI_TDS">
  <MappingInfoHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>XPDMExportCommand</Command>
  </MappingInfoHost >
  <MappingInfoCommand commandName="XPDMExportCommand">
    <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
    <ContextName>XPDM</ContextName>
  </MappingInfoCommand >
</MappingInfoProcessing >

```

Retrieve Mapping information with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.4 XPDM Export definition

Direct export of a structure from 3DEXPERIENCE using the XPGClientBatch utility.

```
<XPDMExport>
  <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
  <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
  <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password>XXX</Password>
  <FileFormat3D>CATIAV5-6R2018</FileFormat3D>
  <GeometryType3D>AsSpecifications</GeometryType3D>
  <FileFormat2D>CATIAV5-6R2018</FileFormat2D>
  <SiteId>XPDM</SiteId>
  <WithFiles>No</WithFiles>
</XPDMExport>
```

Export without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```
<XPDMExportProcessing usecs="true" tdsUrl="http://my.tci-integration-
server.url:port/XCI/XCI_TDS">
  <XPDMExportHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>XPDMExportCommand</Command>
  </XPDMExportHost>
  <XPDMExportCommand commandName="XPDMExportCommand">
    <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
    <FileFormat3D>CATIAV5-6R2018</FileFormat3D>
    <GeometryType3D>AsSpecifications</GeometryType3D>
    <FileFormat2D>CATIAV5-6R2018</FileFormat2D>
    <SiteId>XPDM</SiteId>
    <WithFiles>No</WithFiles>
  </XPDMExportCommand>
</XPDMExportProcessing>
```

Export with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.5 XPDM Import definition

Direct import of a structure to 3DEXPERIENCE using the XPGClientBatch utility.

```
<XPDMImport>
  <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
```

```

<CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
<ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
<Environment>UnifiedTyping</Environment>
<Username>LoginTicket</Username>
<Password>XXX</Password>
<SiteId>XPDM</SiteId>
</XPDMImport>

```

Import without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```

<XPDMImportProcessing usecs="true" tdsUrl="http://my.tci-integration-
server.url:port/XCI/XCI_TDS">
  <XPDMImportHost local="false" cleanupWorkdir="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>XPDMImportCommand</Command>
  </XPDMImportHost>
  <XPDMImportCommand commandName="XPDMImportCommand">
    <CatStartPath>C:\enoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env_XPP</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
    <SiteId>XPDM</SiteId>
  </XPDMImportCommand>
</XPDMImportProcessing>

```

Import with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.6 Folder Export definition

Direct export of a root folder from 3DEXPERIENCE.

```

<FolderExport>
  <CatStartPath>C:\enoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
  <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
  <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password>XXX</Password>
  <SecurityCtx/>
</FolderExport>

```

Export without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```

<FolderExportProcessing usecs="true" tdsUrl="http://my.tci-integration-
server.url:port/XCI/XCI_TDS">
  <FolderExportHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
  </FolderExportHost>

```

```

        <Command>FolderExportCommand</Command>
    </FolderExportHost>
    <FolderExportCommand commandName="FolderExportCommand">
        <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
        <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
        <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
        <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
        <Environment>UnifiedTyping</Environment>
        <Username>LoginTicket</Username>
        <Password>XXX</Password>
    </FolderExportCommand>
</FolderExportProcessing>

```

Export with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.7 Folder Import definition

Direct import of a folder to 3DEXPERIENCE.

```

<FolderImport>
    <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
    <SecurityCtx/>
</FolderImport>

```

Import without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```

<FolderImportProcessing usecs="true" tdsUrl="http://my.tci-integration-
server.url:port/TCITCI_TDS">
    <FolderImportHost local="false">
        <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
        <Command>FolderImportCommand</Command>
    </FolderImportHost>
    <FolderImportCommand commandName="FolderImportCommand">
        <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
        <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
        <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
        <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
        <Environment>UnifiedTyping</Environment>
        <Username>LoginTicket</Username>
        <Password>XXX</Password>
    </FolderImportCommand>
</FolderImportProcessing>

```

Import with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.8 File Export definition

Direct export of a structure from 3DEXPERIENCE using the Downward Compatibility (DWC) utility.

```

<FileExport>

```

```

<CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
<CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
<CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
<ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
<Environment>UnifiedTyping</Environment>
<Username>LoginTicket</Username>
<Password>XXX</Password>
<SecurityCtx/>
<FileFormat3D>CATIAV5-6R2018</FileFormat3D>
<GeometryType3D>AsSpecifications</GeometryType3D>
<FileFormat2D>CATIAV5-6R2018</FileFormat2D>
</FileExport>

```

Export without the Converter Server.

The configurations are defined in the Export and Import Definitions section.

```

<FileExportProcessing usecs="true" tdsUrl="http://my.tci-integration-server.url:port/XCI/XCI_TDS">
  <FileExportHost local="false">
    <Url>http://my.tci-integration-server.url:port/XCI_CS</Url>
    <Command>Command2</Command>
  </FileExportHost>
  <FileExportCommand commandName="Command2">
    <CatStartPath>C:\lenoviaV6R2018x\B420\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv>TSI_3DX_EXP_Env</CatStartEnv>
    <CatStartDirEnv>C:\TCI\TSI_3DX_EXP_R2018x\config</CatStartDirEnv>
    <ServerUrl>https://enovia-server.url:port/3dspace</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password>XXX</Password>
    <SecurityCtx/>
    <FileFormat3D>CATIAV5-6R2018</FileFormat3D>
    <GeometryType3D>AsSpecifications</GeometryType3D>
    <FileFormat2D>CATIAV5-6R2018</FileFormat2D>
  </FileExportCommand>
</FileExportProcessing>

```

Export with the use of the Converter Server.

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.8.1 File Export configuration

The configuration for the FileExport (*TDXExportMode* is set to ExportFiles) can be configured with FileExportConfiguration settings.

```

<FileExportConfiguration>
  <Source type="3DShape">
    <CATPart enableExport="false"/>
    <Thumbnail enableExport="true" viewableSize="300">PNG</Thumbnail>
    <XCAD enableExport="false" xCadFormat="wrl">VRML</XCAD>
    <XCAD enableExport="false" >JT_COMFOX</XCAD>
  </Source>
  <Source type="VPMReference">
    <TDXML enableExport="false" />
    <CustomAttributes enableExport="true">
      <CustomAttribute xName="cusXname">attrName</CustomAttribute>
    </CustomAttributes>
  </Source>

```

```

<Source type="Drawing">
  <CATDrawing enableExport="false"/>
  <Thumbnail enableExport="true" viewableSize="300">PNG</Thumbnail>
  <Print enableExport="true"/>
</Source>
<RestApiExport enabled="true">
  <AssemblyExport enableExport="true" ignoreError="true"/>
  <PartExport enableExport="true" ignoreError="false"/>
  <DrawingExport enableExport="true" ignoreError="true"/>
</RestApiExport>
</FileExportConfiguration>

```

The FileExportConfiguration can be used to disable the CATPart or CATDrawing export. Also, Thumbnails or neutral formats can be exported. For detailed information about the configuration see the documentation of the Export batch in the "Readme_TSI3DXBatch.txt" file.

For each source a set of custom attributes can be defined with the attribute name and the name in the XPDMXML file.

The *ignoreError* flag can be set to true to ignore error at file export.

The 3DXML export and the XCAD export can set the *disable3dPartCaching* attribute to true to disable the 3DPart file caching at export.

The 3DXML export and the XCAD export can set the *enableAssemblyCaching* attribute to true to enable the Assembly file caching at export.

The *RestApiExport* section defines exports with the Rest API from 3DEXPERIENCE. The TDXServer must be configured in the Enovia section.

AssemblyExport: enableExport set to false will skip the assembly file (powerby) export. ignoreError set to true will continue on error.

PartExport: enableExport set to false will skip the part file (powerby) export. ignoreError set to true will continue on error.

DrawingExport: enableExport set to false will skip the drawing file (powerby) export. ignoreError set to true will continue on error.

3.3.2.4.7.9 Revise in V6 configuration

Trigger a revise in V6 from Teamcenter. Location of Control must be 3DEXPERIENCE. The object must have been transferred to 3DEXPERIENCE previously

Direct revise without ConverterServer:

```

<ReviseInV6>
  <CatStartPath>path-to\B419\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_XPP_XCI</CatStartEnv>
  <CatStartDirEnv>path-to-cat-env</CatStartDirEnv>
  <ServerUrl>https://enovia-server-and-enovia-port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password plaintext="true">XXX</Password>
</ReviseInV6>

```

Revise with ConverterServer:

```

<ReviselNV6Processing usecs="true" tdsUrl="http://localhost:20180/XCI">
  <ReviselNV6Host local="false">
    <Url>http://localhost:20182/XCI_CS</Url>
    <Command>ReviselNV6Command</Command>
  </ReviselNV6Host>
  <ReviselNV6Command commandName="ReviselNV6Command">
    <CatStartPath> path-to\B419\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv> TSI_3DX_EXP_XPP_XCI </CatStartEnv>
    <CatStartDirEnv> path-to-cat-env </CatStartDirEnv>
    <ServerUrl> https://enovia-server-and-enovia-port/3dspace /</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password plaintext="true">XXX</Password>
  </ReviselNV6Command>
</ReviselNV6Processing>

```

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.7.10 EffectivityExport configuration

Export effectivities from 3DEXPERIENCE.

Effectivity export without ConverterServer:

```

<EffectivityExport>
  <CatStartPath>path-to\B419\win_b64\code\bin\CATSTART.exe</CatStartPath>
  <CatStartEnv>TSI_3DX_EXP_XPP_XCI</CatStartEnv>
  <CatStartDirEnv>path-to-cat-env</CatStartDirEnv>
  <ServerUrl>https://enovia-server-and-enovia-port/3dspace</ServerUrl>
  <Environment>UnifiedTyping</Environment>
  <Username>LoginTicket</Username>
  <Password plaintext="true">XXX</Password>
</EffectivityExport>

```

Effectivity export with ConverterServer:

```

<EffectivityExportProcessingusecs="true" tdsUrl="http://localhost:20180/XCI">
  <EffectivityExportHostlocal="false">
    <Url>http://localhost:20182/XCI_CS</Url>
    <Command>ExportEffectivitiesCommand</Command>
  </EffectivityExportHost>
  <EffectivityExportCommandcommandName="ExportEffectivitiesCommand">
    <CatStartPath> path-to\B419\win_b64\code\bin\CATSTART.exe</CatStartPath>
    <CatStartEnv> TSI_3DX_EXP_XPP_XCI </CatStartEnv>
    <CatStartDirEnv> path-to-cat-env </CatStartDirEnv>
    <ServerUrl> https://enovia-server-and-enovia-port/3dspace /</ServerUrl>
    <Environment>UnifiedTyping</Environment>
    <Username>LoginTicket</Username>
    <Password plaintext="true">XXX</Password>
  </EffectivityExportCommand>
</EffectivityExportProcessing>

```

The configurations are defined in the Export and Import Definitions section.

3.3.2.4.8 Custom Attribute Mapping

The CustomAttributeMapping in the Enovia section can be used to create a pdm-cust-config.xml file for xpdm import and export.

```
<CustomAttributeMapping enabled="true"
    createPdmCustConfigForExport="true"
    createPdmCustConfigForImport="true">
  <CustomObject xname="Product" type="VPMReference" mappingtype="VPMReference">
    <CustomAttribute xname="V_versionComment" name="V_versionComment"
      type="string" export="true"/>
  <CustomObject xname="Drawing" type="Drawing" mappingtype="Drawing"/>
  <CustomObject xname="DrawingAggr" type="Drawing" mappingtype="Drawing"/>
  <CustomObject xname="Rep3D" type="3DShape" mappingtype="3DShape"/>
  <CustomObject xname="Rep3DAggr" type="3DShape" mappingtype="3DShape"/>
  <CustomObject xname="Document" type="Document" mappingtype="Document"/>
</CustomAttributeMapping>
```

<CustomAttributeMapping>

The mapping can be switched on or off using the *enabled* attribute.

Set *createPdmCustConfigForExport* to *true* to create a pdm-cust-config.xml file for xpdm export.

set *createPdmCustConfigForImport* to *true* to create a pdm-cust-config.xml file for xpdm import.

It can contain multiple *CustomObject* definitions.

<CustomObject>

Each object definition has an *xname*, *type*, and *mappingtype* attribute and can contain multiple *CustomAttribute* definitions.

<CustomAttribute>

The *xname* defines the Property name in the XpdmXml. The *type* defines the data type of the property. The *name* is the 3DEXPERIENCE attribute name. The *export* and *import* flag define the attribute for import and/or export.

The example above defines the *V_versionComment* attribute for export of *VPMReference* types

3.3.2.4.9 ImportStep (DS Cloud only)

Settings for the step Import used by the Enterprise IP Exchange service.

```
<ImportStep>
  <ImportCompanyName>My Company name</ImportCompanyName>
  ...
</ImportStep>
```

ImportCompanyName: The company name for the STEP header. Default is "T-Systems".

ImportCompanyId: The company id for the STEP header. Default is "www.t-systems.com".

ImportJobPollingSleepPeriod: Time to sleep in milliseconds for the Job result polling. Default is 10000.

ImportJobMaximumDuration: Time in minutes to wait for the job result. Default is 30.

ImportJobMaximumDurationResultsInError: true to set the job result to success if it runs longer than the *ImportJobMaximumDuration*. Default is true.

3.3.2.4.10 ExportStep (DS Cloud only)

Settings for the step export used by the Enterprise IP Exchange service.

```
<ExportStep>
  <ExportJobPollingSleepPeriod>10000</ExportJobPollingSleepPeriod>
  <ExportJobMaximumDuration>60</ExportJobMaximumDuration>
</ExportStep>
```

ExportJobPollingSleepPeriod: Time to sleep in milliseconds for the Job result polling. Default is 10000 (10 seconds).

ExportJobMaximumDuration: Time in minutes to wait for the job result. 0 or negative for infinite. Default is 60.

3.3.2.5 XciWeb

In the following chapters the configuration options for the tag *XciWeb* are described.

3.3.2.5.1 AdminPassword

```
<AdminPassword plaintext="true">XXX</AdminPassword>
```

Admin password for “xci-admin” user.

Default setting for *plaintext* is “false”.

3.3.2.5.2 SessionTimeout

```
<SessionTimeout>2000</SessionTimeout>
```

The session timeout in seconds used for the TCI web interface.

Default setting for *SessionTimeout* is “1800”.

3.3.2.5.3 MaxQueryReturnNumber

```
<MaxQueryReturnNumber>50</MaxQueryReturnNumber>
```

The maximum number of objects returned for the 3DX and PDM queries.

Default setting for *MaxQueryReturnNumber* is “25”.

3.3.2.5.4 MaxDBReturnNumber

```
<MaxDBReturnNumber>50</MaxDBReturnNumber>
```

The maximum number of objects returned for the DB queries.

Default setting for *MaxDBReturnNumber* is “25”.

3.3.2.5.5 Other XciWebsettings

```
<DetailsEnabled>true</DetailsEnabled>
```

True to enable the Tools->Details menu in the XciWeb UI.

```
<FileCacheInfoEnabled maxReturn="500">true</FileCacheInfoEnabled>
```

True to enable the Tools->File Cache menu in the XciWeb UI.

```
<ShowMetaUpdate3DXEnabled>true</ShowMetaUpdate3DXEnabled>
```

True to enable the “update properties in 3DEXPERIENCE” Button in the PdmInfo View.

```
<ShowRevise3DXEnabled>true</ShowRevise3DXEnabled>
```

True to enable the “revise in 3DEXPERIENCE” Button in the PdmInfo View.

```
<Show3DXConfigurationExportEnabled>true</Show3DXConfigurationExportEnabled>
```

True to enable the 3DX configuration export functions.

```
<Show3DXSendConfigurationEnabled>true</Show3DXSendConfigurationEnabled>
```

True to enable the 3DX send configuration checkbox.

3.3.2.6 Scheduler

The Scheduler functionality must be enabled with the enabled flag set to true.

```
<Scheduler enabled="true">
```

...

```
</Scheduler>
```

In the following chapters the configuration options for the tag *Scheduler* are described.

3.3.2.6.1 ThreadPoolSize

The *ThreadPoolSize* setting initializes the size of the Scheduler thread pool. The default is 5, minimum is 3. A restart is needed to use the new value.

```
<Scheduler enabled="true">
```

```
    <ThreadPoolSize>5</ThreadPoolSize>
```

...

3.3.2.6.2 StartupDelay

The *StartupDelay* setting defines the startup delay for tasks without *startTime* setting in seconds. The default is 60 seconds.

```
<Scheduler enabled="true">
```

```
    <StartupDelay>120</StartupDelay>
```

...

3.3.2.6.3 TaskList

The *TaskList* contains a list of *Task* objects to be run with the scheduler.

```
<Scheduler enabled="true">
```

```
    <startupDelay>20</startupDelay>
```

```
    <TaskList>
```

```
        <Task name="PDM-Released" period="300" ...>...
```

The *Task* object is the definition of the Tasks to be scheduled. The *Task* contains a list of *TaskSettings*. The Task has the following attributes:

- enabled – true to run the task.
- name – the unique name of the Task.
- loadClass – the class to use which implements the java interface *TaskRunnable*
- startTime – the start time of the task, e.g. "14:12:00".
- period – the period in seconds to wait for next start of the task.
- type – the scheduler type *FixedRate* or *FixedDelay*
 - FixedRate: enabled first after the given initial delay, and subsequently with the given period.

- FixedDelay: enabled first after the given initial delay, and subsequently with the given delay between the termination of one execution and the commencement of the next.

The two standard implementations are `com.tsystems.xci.scheduler.HandleReleasedPdmObjects` and `com.tsystems.xci.scheduler.HandleReleasedEnoviaObjects`.

3.3.2.6.3.0.1 HandleReleasedPdmObjects

The `HandleReleasedPdmObjects` task queries for objects with a defined state in Teamcenter. If the found revision is a new version of a formerly transferred object a new Transfer Job is initiated for this revision.

The following *TaskSetting* are supported.

- `initialStartTime` – the initial start time if no further run of this task is known.
- `objectType` – the Item Revision types to search for.
- `objectName` – the object name to search for
- `itemId` – the item id pattern.
- `statusList` – list of status to search for.
- `projectId` – list of project ID's to search for.
- `revRuleName`, `revRuleUid`, `force`, `removeExistingNotProvided`, and `withGeometricalConversion`, are the settings for the created Jobs.
 - `revRuleName` – Revision Rule name, empty for default.
 - `revRuleUid` – Revision Rule UID, empty for default.
 - `force` – true to disable skip functionality
 - `removeExistingNotProvided` – true to remove existing children in 3DEXPERIENCE.
 - `withGeometricalConversion` – true to convert the imports to 3DEXPERIENCE.
- `waitForDesignJobs` – true to wait for the Jobs to finish.
- `writeReport` – true to write a report in the persistent directory

The `objectType`, `objectName`, `itemId`, `statusList`, and `projectId` can contain multiple entries with the configured delimiting character in Teamcenter (Teamcenter default “;”).

Example Task setting for `HandleReleasedPdmObjects`, start the task at 2:00 AM and repeat the task every 24 h.

```
<Task
  name="PDM-Released"
  startTime="2:00:00"
  period="86400"
  loadClass="com.tsystems.xci.scheduler.HandleReleasedPdmObjects"
  type="FixedRate">
  <TaskSetting name="initialStartTime">2020-11-09T00:00:00.000Z</TaskSetting>
  <TaskSetting name="objectType">ItemRevision;Design Revision</TaskSetting>
  <TaskSetting name="itemId"></TaskSetting>
  <TaskSetting name="statusList">TCM Released;Frozen </TaskSetting>
  <TaskSetting name="revRuleName">Any Status; No Working</TaskSetting>
  <TaskSetting name="revRuleUid">QoU5$Ot5wQEgB</TaskSetting>
  <TaskSetting name="force">>false</TaskSetting>
```

```

    <TaskSetting name="removeExistingNotProvided">true</TaskSetting>
    <TaskSetting name="withGeometricalConversion">true</TaskSetting>
    <TaskSetting name="waitForDesignJobs">false</TaskSetting>
    <TaskSetting name="writeReport">true</TaskSetting>
  </Task>
  ...

```

3.3.2.6.3.0.2 HandleReleasedEnoviaObjects

The HandleReleasedEnoviaObjects task queries for objects with a defined state in 3DEXPERIENCE. If the found revision is a new version of a formerly transferred object a new Transfer Job is initiated for this revision.

The following *TaskSetting* are supported.

- initialStartTime – the initial start time, if not provided the time of the first run is used.
- objectType – the revision types to search for (comma separated to search for multiple types).
- objectName – the title (V_Name) search pattern.
- plmExternalId – the part number (PLMExternalId) search pattern.
- statusList – list of status to search for (comma separated to search for multiple types).
- collaborativeSpace – list of collaborative spaces to search for (comma separated to search for multiple types).
- force, and removeExistingNotProvided, are the settings for the created Jobs.
 - force – true to disable skip functionality
 - removeExistingNotProvided – true to remove existing children in Teamcenter.
- waitForDesignJobs – true to wait for the Jobs to finish.
- writeReport – true to write a report in the persistent directory

Example Task setting for HandleReleasedEnoviaObjects, start the task at 2:00 AM and repeat the task every 24 h.

```

<Task
  name="TDX-Released"
  startTime="2:00:00"
  period="86400"
  loadClass="com.tsystems.xci.scheduler.HandleReleasedEnoviaObjects"
  type="FixedRate">
  <TaskSetting name="initialStartTime">2020-11-09T00:00:00.000Z</TaskSetting>
  <TaskSetting name="objectType">VPMReference</TaskSetting>
  <TaskSetting name="objectName"></TaskSetting>
  <TaskSetting name="plmExternalId"></TaskSetting>
  <TaskSetting name="statusList">FROZEN,RELEASED</TaskSetting>
  <TaskSetting name="collaborativeSpace">Common Space</TaskSetting>
  <TaskSetting name="force">>false</TaskSetting>
  <TaskSetting name="waitForDesignJobs">>false</TaskSetting>
  <TaskSetting name="writeReport">true</TaskSetting>
</Task>
...

```

3.3.3 3DEXPERIENCE Environment File

The following environment variables can be set in the environment file used by the 3DEXPERIENCE.

XPG_ACTIVATE_3DPART=1	activate the 3D Part support
XPG_ACTIVATE_NONCADDDOC=1	activate the Non-CAD document support
XPG_ACTIVATE_MAPPED_REVISIONFAMILY=1	activate the mapped Revision Family support
XPG_ACTIVATE_V5NATIVE_IMPORT=1	activate the V5 native import
ENABLE_DETAILED_REPORT=1	enable a detailed report

For more information about the environment configuration please refer to the 3DEXPERIENCE documentation.

3.3.4 3DEXPERIENCE Custom Configuration

In the 3DEXPERIENCE batch server environment of the XPG Client Service Batch a `pdm-cust-config.xml` configuration file must be installed:

```
<CATIA      install      path>\win_b64\reffiles\XPG\config\client\pdm-cust-  
config.xml
```

The following sample shows a sample configuration for the PDM custom configuration:

```
<?xml version="1.0" encoding="UTF-8"?>  
  
<XPGCustConfig SchemaVersion="V6R2013x" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
    xsi:noNamespaceSchemaLocation="..\XSD\XPG\pdm-cust-config.xsd">  
  
    <ObjectsConfig >  
  
        <Object XPGXMLType="Product" V6Type="VPMReference" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="ProductInst" V6Type="VPMInstance" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="Rep3D" V6Type="3DShape" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="Rep3DAggr" V6Type="3DShape" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="Rep3DInst" V6Type="VPMRepInstance" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="Drawing" V6Type="Drawing" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="DrawingAggr" V6Type="Drawing" MappingType="DefaultCustomization" />  
  
        <Object XPGXMLType="DrawingInst" V6Type="VPMRepInstance" MappingType="DefaultCustomization" />  
  
    </ObjectsConfig>  
  
</XPGCustConfig>
```

For more information about the 3DEXPERIENCE custom configuration please refer to the 3DEXPERIENCE documentation.

4 Installing the TCI Teamcenter Rich Client Plugin

4.1 Installation

The TCI Teamcenter Rich Client Plugin extends the Teamcenter functionality to communicate with 3DEXPERIENCE.

You should perform the following steps with your Teamcenter administrator.

Download the software from <http://www.cmi-support.com/>. Choose “Download” → “TCI” → “TCI Teamcenter Rich Client Plugin” and select the appropriate version (e.g. Package for Teamcenter 11.2).

Locate the downloaded archive file (TCI_TC_UI_[xxxx]_V[xxx].zip). Extract the content of the archive file to a temporary location, e.g. C:\temp\TCI_TC_UI_1120_V320.

Inside the temporary installation location, locate the folder TCI_TC_UI_[xxxx]_R[xxxxx]_V[xxx]\install\windows for an installation on a client with Windows 32-bit or the folder TCI_TC_UI_[xxxx]_V[xxx]\install\windows_64 for an installation on a client with Windows 64-bit.

Start the installation by double-clicking Setup.exe.

The “TCI Teamcenter Rich Client Plugin” wizard appears. Click Next:

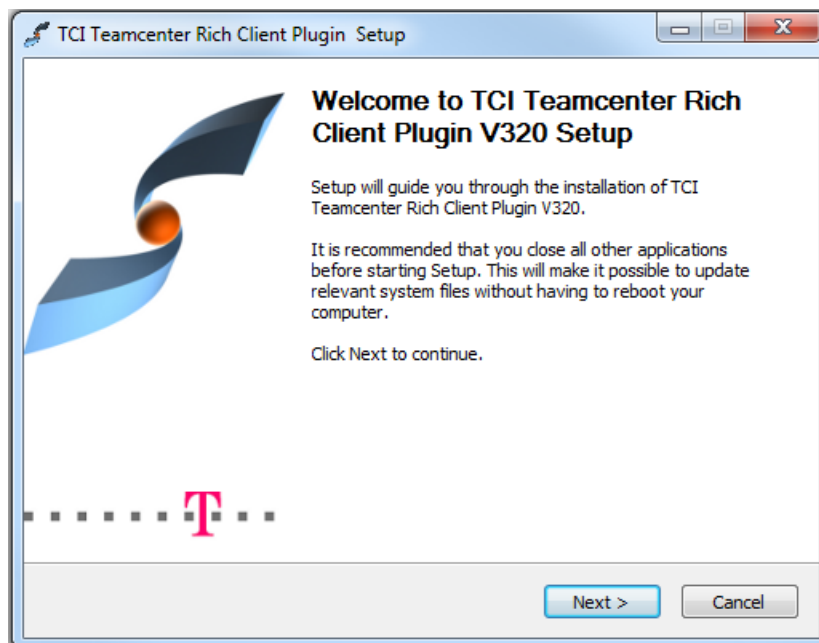


Figure 2: Setup – Start page

The License Agreement page displays the link to the general terms and conditions of software purchase and maintenance of T-Systems International GmbH. You have to click “I Agree” to get to the next page:

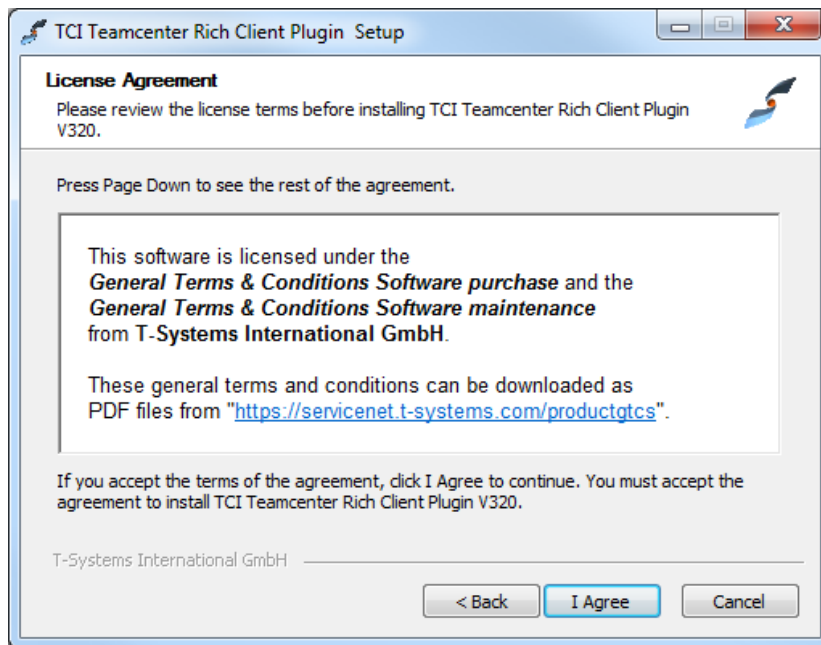


Figure 3: Setup – License Agreement page

On this page you have to choose for which users you want to install the TCI Teamcenter Rich Client Plugin. Proceed with Next:

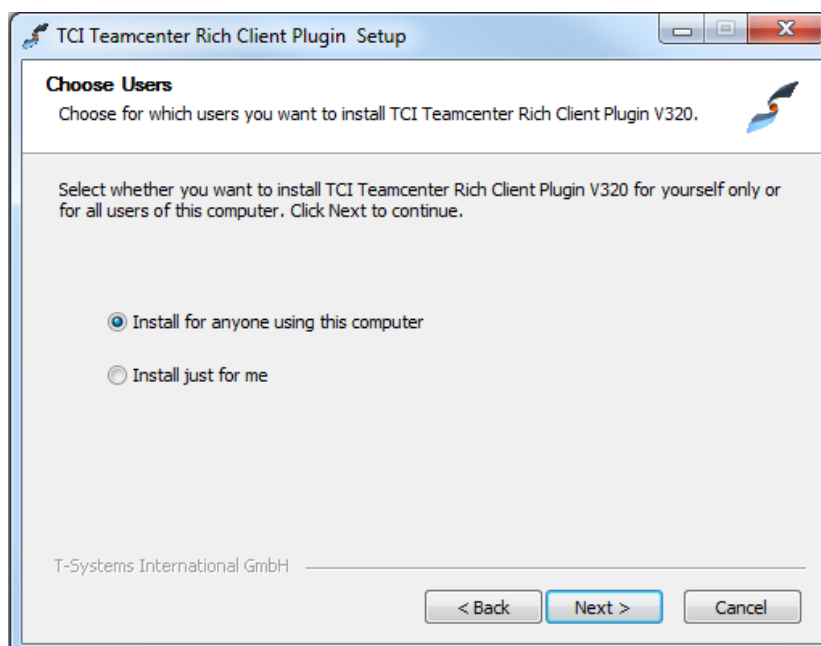


Figure 4: Setup – Choose Users page

On the Choose Install Location dialog you have to enter the folder where setup will install the TCI Teamcenter Rich Client Plugin. Select the path using the Browse button and proceed with Next:

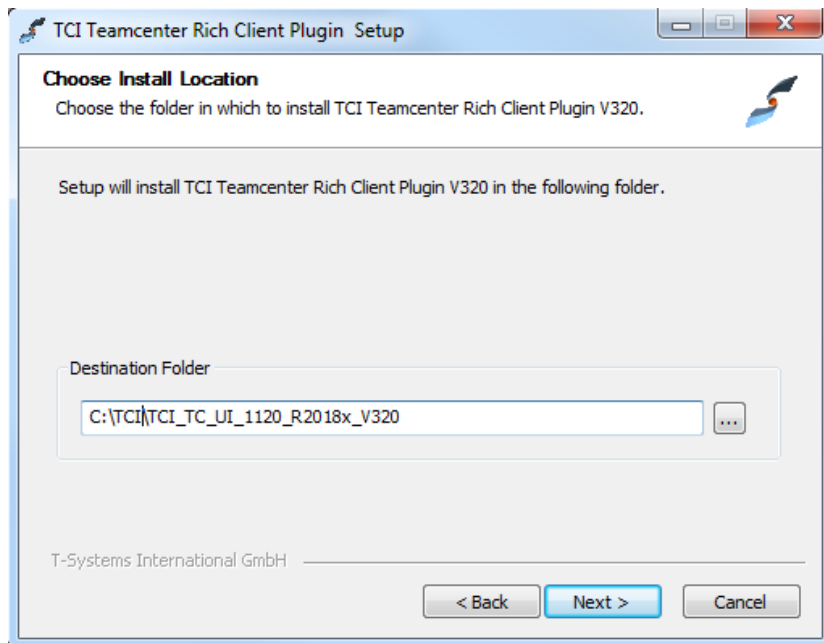


Figure 5: Setup – Choose Install Location page

On the next page you will be asked for the folder, where the Teamcenter Rich Client resides (TC_PORTAL_ROOT). The Rich Client folder is usually named “portal” and contains also the Rich Client start script “portal.bat”.

Please contact your Teamcenter system administrator to make sure that the selected path is correct. Select the folder using the Browse button and proceed with Next:

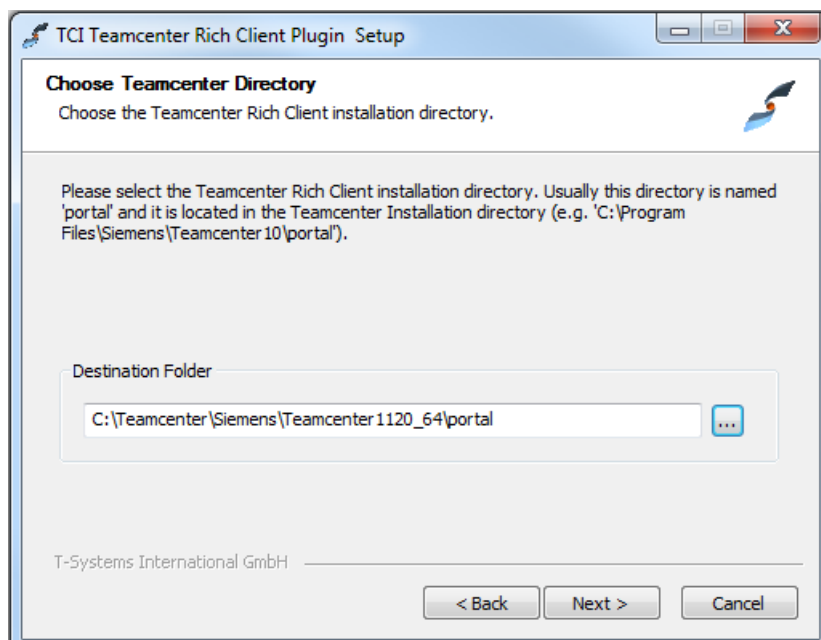


Figure 6: Setup – Choose Teamcenter Directory page

Select the Teamcenter Rich Client start file. This is a batch script that is located in the Rich Client folder (the one you have selected in the previous step). The file is usually named “portal.bat”.

Please contact your Teamcenter system administrator to make sure that you have selected the correct file. Select the file using the Browse button and proceed with Next:

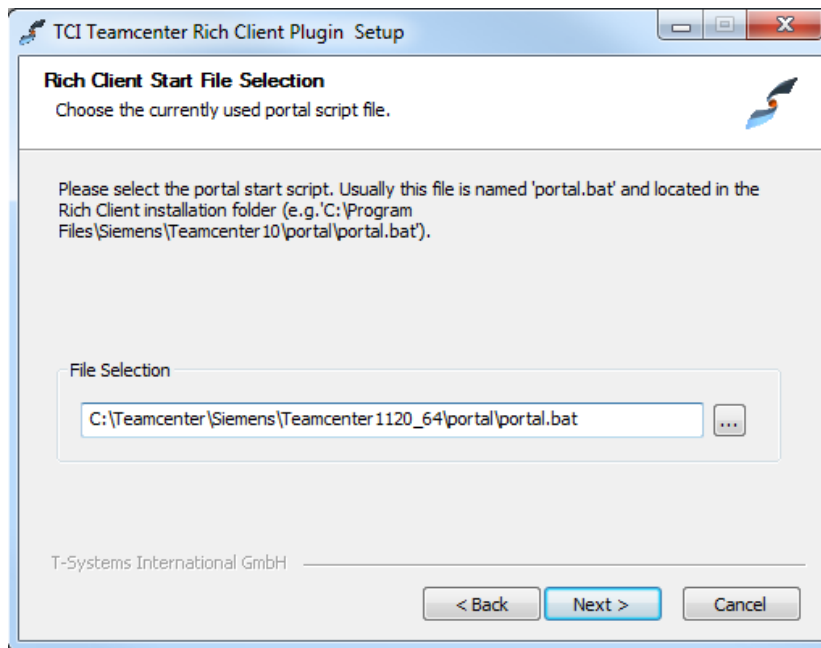


Figure 7: Setup – Choose Rich Client start file page

On the next page you have to define the TCI settings. Enter the correct value and proceed with Next:

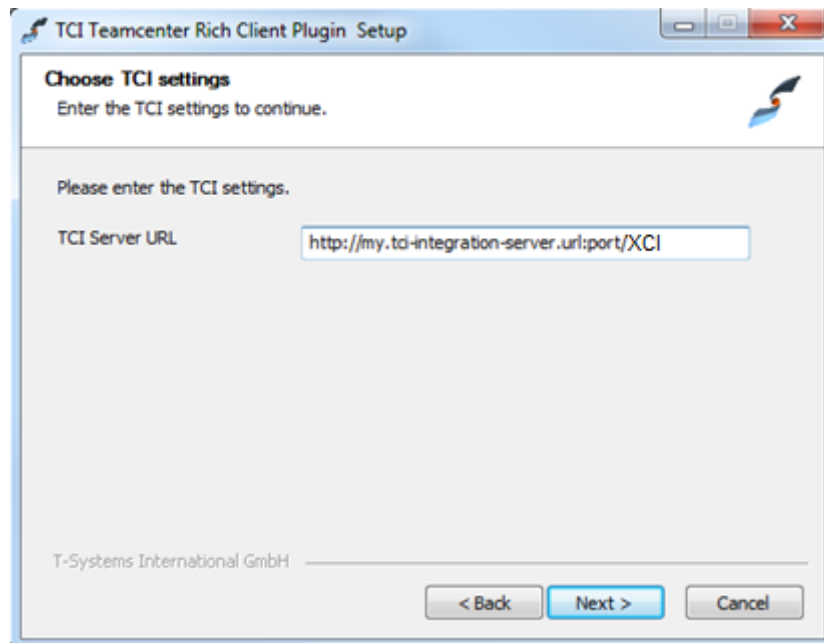


Figure.8: Setup – TCI settings page

The Check Setup Information page lists all information which you have entered. If you detect some wrong information, please use the Back button to enter correct information, otherwise start the installation with click on the Next button:

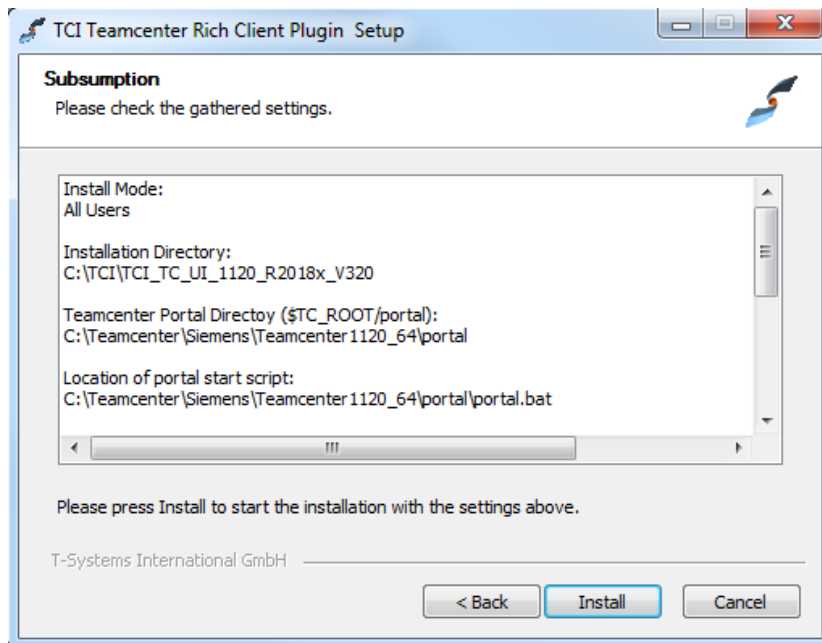


Figure.9: Setup – Subsumption page

For Teamcenter the registry will be generated.

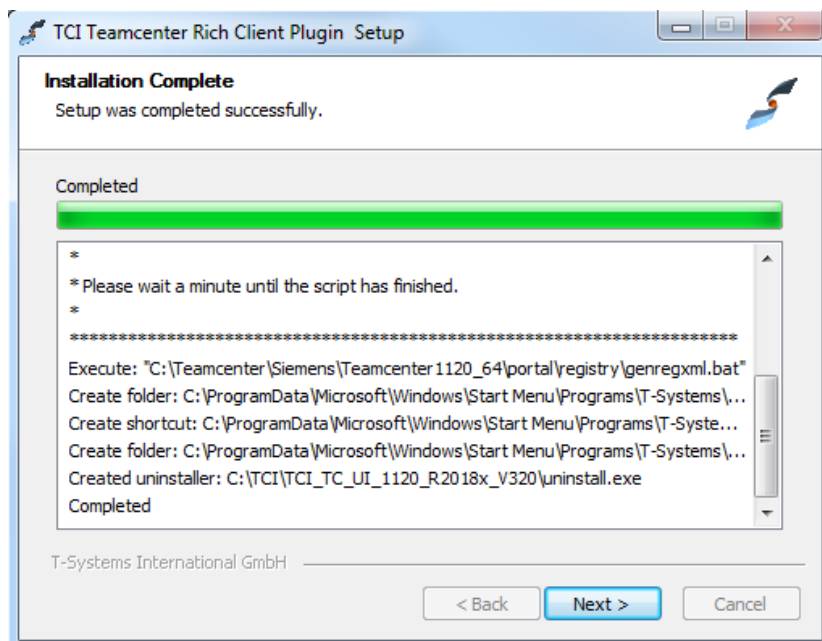


Figure 10: Setup – Installation Complete page

Once the wizard has successfully completed, click Finish:

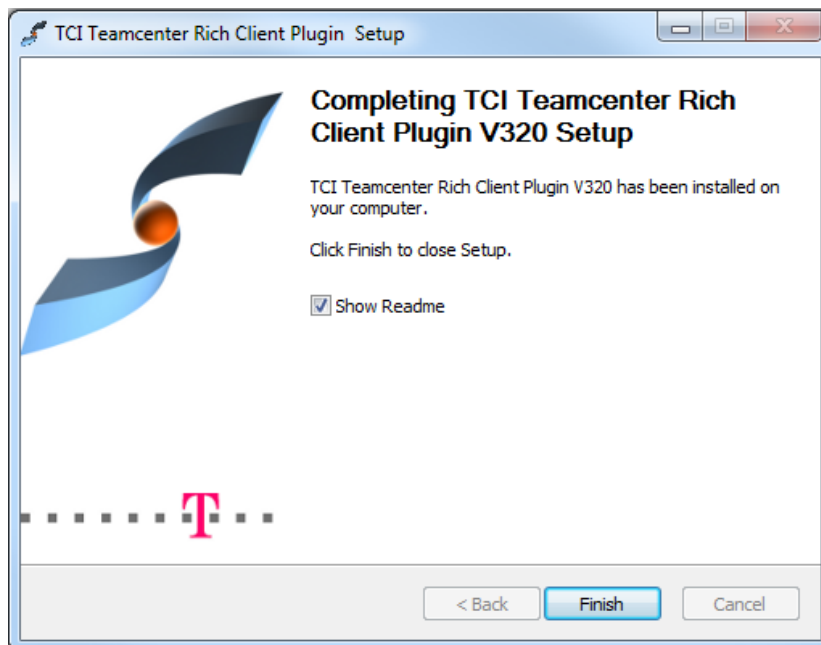


Figure 11: Setup – Finished page

4.2 Silent Installation

It is possible to use a silent installation for the client installation.

4.2.1 Parameters

The following parameters are available for the silent installation:

Parameter Name	Example Value	Description
/S		Activates the silent mode.
/User= value	Admin	Installation only for yourself (“User”) or for all users of the computer (“Admin”). Default is the highest possible value.
/TeamcenterInstDir= (Directory path)	C:\Program Files\Siemens\Teamcenter1120_64\portal	The directory of the Teamcenter Rich Client installation. <must be set>
/TeamcenterPortalFile= (File full path)	C:\Program Files\Siemens\Teamcenter1120_64\portal\portal.bat	The full path of the portal.bat start script file. <must be set>
/TciServerURL= (URL)	http://my.tci-integration-server.url:port/XCI	The TCI Server URL. <must be set>
/D=(Directory path)	C:\TCI\TCI_TC_UI_1120_V320	The target directory of the installation.

Table 5: Silent installation parameters for TCI Teamcenter Rich Client Plugin

The parameter `/S`, the both values for the Teamcenter installation are required.

The parameter `/User` is optional. The highest possible value will be used as default value.

The parameter `/D` is optional. A part of the value will be taken from the current directory. It must be the last parameter used in the command line and must not contain any quotes, even if the path contains spaces. Only absolute paths are supported.

If one value is not given and it is not possible to fetch a value from the system the installation process will be stopped and the error message can be found in the file `install.log`.

4.2.2 Usage

For the silent installation please open a command line window as administrator.

Inside the temporary installation location, locate the folder `TCI_TC_UI_[xxxx]_R[xxxxx]_V[xxx]\install\windows` for an installation on a client with Windows 32-bit or the folder `TCI_TC_UI_[xxxx]_R[xxxxx]_V[xxx]\install\windows_64` for an installation on a client with Windows 64-bit.

Start the silent installation with a command line like this example:

```
Setup.exe /S /User= Admin /TeamcenterInstDir= "C:\Program  
Files\Siemens\Teamcenter1120_64\portal" /TeamcenterPortalFile= "C:\Program  
Files\Siemens\Teamcenter1120_64\portal\portal.bat" /TciServerURL= http://my.tci-  
integration-server.url:port/XCI /D=C:\TCI\TCI_TC_UI_1120_V320
```

The log file `install.log` of the installation will be stored in the current directory. There you can find the information about the installation process.

When the installation ended successful you will find the success message in this file.

4.3 Environment variables

The installation creates the start script `TCI_TC_UI_Start.bat`.

Here you can find an overview of the possible environment variables in this start script.

Environment Variable	Example Value	Description
XCI_SERVER_URL	http://my.tci-integration-server.url:port/XCI	The TCI Server URL. <mandatory>
XCI_TCIC_COMPATIBILITY	False	Use TcIC compatibility mode. See section 3.3.2.3.6
XCI_SEND_OBJ_MGR_AS_STRING	True	true: use only event custom attributes and not the export document Default value is "true".
XCI_EXPORT_TYPE	Text	Document type for complex export data
XCI_EXPORT_NAMED_REF	Text	The named reference type for complex export data
XCI_ENABLE_OPEN_IN_3DX	ON	ON: Enable the Open in 3DEXPERIENCE command in the Teamcenter Rich Client. Default is OFF
XCI_CATDIRENV	<pathtoenv>\CATEnv	Required for XCI_ENABLE_OPEN_IN_3DX: the path to the 3DEXPERIENCE Environment directory.
XCI_CATENV	Env	Required for XCI_ENABLE_OPEN_IN_3DX: the Environmentname for the 3DEXPERIENCE Environment.
XCI_CATSTART	<dsinstallpath>\B423\win_b64\code\bin\CATSTART.exe	Required for XCI_ENABLE_OPEN_IN_3DX: Path to the cat start executable of the 3DEXPERIENCE client.

Table 6: TCI Teamcenter Rich Client Plugin - environment variables

5 Installing the TCI Teamcenter Active Workspace Enhancement

5.1 Installation

The TCI Teamcenter Active Workspace Enhancement extends the Teamcenter functionality to communicate with 3DEXPERIENCE.

To install the Active Workspace Enhancement of TCI on the server the following steps have to be performed.

Locate the downloaded archive (e.g. *TCI_AWS_TC13.0_V350.zip*). Unpack the archive to a directory, for example to "*C:\temp\server\aws*". Inside this you will find several sub-directories, which contain the TCI enhancement for Active Workspace.

Copy the directory *tc-module* to the *src* directory in the stage directory of your Teamcenter Active Workspace installation, e.g. "*C:\TC1300\aws2\stage\src*".

Copy the image of the image directory to the *src\image* directory in the stage directory of your Teamcenter Active Workspace installation, e.g. "*C:\TC1300\aws2\stage\src\image*".

Add the string "*tc-module*" to the existing file *kit.json* in the solution directory of your Teamcenter Active Workspace installation, e.g. "*C:\TC1300\aws2\stage\src\solution\kit.json*".

Open a console window as administrator.

Change to the stage directory of your Teamcenter Active Workspace installation, e.g. "*C:\TC1300\aws2\stage*".

Publish the new Active Workspace system including TCI with the command "*awbuild.cmd*" to the gateway.

Your gatewayURL is defined in the file *tem.properties* in the stage directory of your Teamcenter Active Workspace installation, e.g. "*C:\TC1300\aws2\stage\tem.properties*".

Configure the Teamcenter Preference *XCI_SERVER_URL* matching the variable in Chapter 4.3, e.g. "*http://my.tci-integration-server.url:port/XCI*".

6 Installing the TCI 3DEXPERIENCE Rich Client Extension

6.1 Installation

The TCI 3DEXPERIENCE Rich Client Extension extends the 3DEXPERIENCE functionality with TCI commands.

You should perform the following steps with your 3DEXPERIENCE administrator.

Download the software from <http://www.cmi-support.com/>. Choose “Download” → “TCI” → “TCI 3DEXPERIENCE Rich Client Extension” and select the appropriate version (e.g. Package for R2018x).

Locate the downloaded archive file (TCI_3DX_UI_R[xxxxx]_V[xxx].zip). Extract the content of the archive file to a temporary location, e.g. C:\temp\TCI_3DX_UI_R2018x_V350.

Inside the temporary installation location, locate the folder TCI_3DX_UI_R[xxxxx]_V[xxx]\install\windows for an installation on a client with Windows 32-bit or the folder TCI_3DX_UI_R[xxxxx]_V[xxx]\install\windows_64 for an installation on a client with Windows 64-bit.

Start the installation by double-clicking Setup.exe and follow the instructions. The 3DEXPERIENCE values will be received from the registry if possible.

6.2 Silent Installation

It is possible to use a silent installation for the extension installation.

6.2.1 Parameters

The following parameters are available for the silent installation:

Parameter Name	Example Value	Description
/S		Activates the silent mode.
/User= value	Admin	Installation only for yourself ("User") or for all users of the computer ("Admin"). Default is the highest possible value.
/3DXInstDir= (Directory path)	C:\Program Files\Dassault Systemes\B420	The directory of the 3DEXPERIENCE installation.
/3DXEnvFile= (File full path)	C:\Program Files\Dassault Systemes\B420\CATEnv\Env.txt	The full path of the 3DEXPERIENCE environment file.
/D=(Directory path)	C:\TCI\TCI_3DX_UI_R2018x_V350	The target directory of the installation.

Table 7: Silent installation parameters for 3DEXPERIENCE Rich Client Extension

The parameter `/S` is required.

The parameter `/User` is optional. The highest possible value will be used as default value.

The both values for the 3DEXPERIENCE installation are optional; the values can be fetched from the Windows registry.

The parameter `/D` is optional. A part of the value will be taken from the current directory. It must be the last parameter used in the command line and must not contain any quotes, even if the path contains spaces. Only absolute paths are supported.

If one value is not given and it is not possible to fetch a value from the system the installation process will be stopped and the error message can be found in the file `install.log`.

6.2.2 Usage

For the silent installation please open a command line window as administrator.

Inside the temporary installation location, locate the folder `TCI_3DX_UI_R[xxxxx]_V[xxx]\install\windows` for an installation on a client with Windows 32-bit or the folder `TCI_3DX_UI_R[xxxxx]_V[xxx]\install\windows_64` for an installation on a client with Windows 64-bit.

Start the silent installation with a command line like this example:

```
Setup.exe /S /User= Admin /3DXInstDir= "C:\Program Files\Dassault Systemes\B420"
/3DXEnvFile= "C:\Program Files\Dassault Systemes\B420\CATEnv\Env.txt"
/D=C:\TCI\TCI_3DX_UI_R2018x_V350
```

The log file `install.log` of the installation will be stored in the current directory. There you can find the information about the installation process.

When the installation ended successful you will find the success message in this file.

6.3 Environment variables

The installation creates the start script `TCI_3DX_UI_Start.bat`.

Here you can find an overview of the possible environment variables in this start script.

Parameter Name	Example Value	Description
<code>XCI_DEBUG</code>	ON	Enable the TCI debug
<code>XCI_ENABLE_OPENINPDMCMD</code>	ON	Enable the Command to open the selected Product in the Teamcenter Rich Client or Web Client
<code>XCI_TEAMCENTER_PORTAL</code>	See sample below.	Optional: Path to Teamcenter Rich Client portal.bat, if more than one client is installed. By default, will connect to the Teamcenter client that is associated with the *.ugs file extension.
<code>XCI_WEBBROWSER</code>	See sample below.	Optional: Path to the web browser executable to be used for the open URL command.
<code>XCI_TEAMCENTER_WEBCLIENT_URL</code>	See sample below.	The webclient url used to open the referenced object in a Teamcenter Webclient. This will disable the open in Teamcenter Rich Client functionality.
<code>XCI_SERVERURL</code>	See Client extensions configuration	Path to the TCI integration server

Table 8: TCI 3DEXPERIENCE Rich Client Extension environment variables

Samples for Environment variables:

XCI_TEAMCENTER_PORTAL:

D:\Teamcenter12\portal\portal.bat

XCI_WEBBROWSER:

C:\Program Files\Internet Explorer\iexplore.exe

XCI_TEAMCENTER_WEBCLIENT_URL (Teamcenter 11 Webclient):

open default:

<http://tcserver:11080/tc/webclient#argument=>

open in Teamcenter Navigator app:

<http://tcserver:11080/tc/webclient#appCode=Navigator&argument=>

open in Product Structure app

<http://tcserver:11080/tc/webclient#appCode=PSE&argument=>

XCI_TEAMCENTER_WEBCLIENT_URL (Active Workspace):

open default:

<http://tcserver:3000/#/com.siemens.splm.clientfx.tcui.xrt.showObject?uid=>

open the content page:

<http://tcserver:3000/#/com.siemens.splm.clientfx.tcui.xrt.showObject?page=Content&uid=>

6.4 Client extensions configuration

The client must be configured using the 3DEXPERIENCE options dialog.

The *TCI* configuration dialog under *Options* → *General* → *Compatibility* shows some version information of the integration and the server URL can be configured to connect to the TCI integration server. The client supports the encryption of the communication channel using SSL. To enable this feature, the client must be configured to connect a https URL.

Examples:

`http://my.tci-integration-server.url:port/XCI`

<https://my.tci-integration-server.url:port/XCI>

Instead of using the preference you can also set the following variable in the start script

`TCI_3DX_UI_Start.bat:`

`XCI_SERVERURL`

Ex.: `set XCI_SERVERURL=http://my.tci-integration-server.url:port/XCI`

This URL will be used if the preference is not set.

To verify the connectivity to the configured server the *Check Server* button can be used. A message will be shown to indicate successful or unsuccessful connections.

7 Installing the XCI 3DEXPERIENCE Batch

The XCI 3DEXPERIENCE Batch must be installed on any host that you configure to export or import from 3DEXPERIENCE.

As a prerequisite the 3DEXPERIENCE Rich Client needs to be installed.

The XCI 3DEXPERIENCE Batch utility requires licman20 as its license manager.

For detailed information about installation and configuration of the XCI 3DEXPERIENCE Batch also see the *XCI3DXBatch Installation & Operations Manual*.

7.1 Installation

You should perform the following steps with your 3DEXPERIENCE administrator.

Download the software from <http://www.cmi-support.com/>. Choose “Download” → “TCI” → “XCI 3DEXPERIENCE Batch” and select the appropriate version (e.g. Package for R2019x).

Locate the downloaded archive file (XCI_3DX_BATCH_R[xxxxx]_V[xxx].zip). Extract the content of the archive file to a temporary location, e.g. “C:\temp\XCI_3DX_BATCH_R2019x_V350”.

Inside the temporary installation location, locate the folder “XCI_3DX_BATCH_R[xxxxx]_V[xxx]\install\windows_64” for the installation.

Start the installation by double-clicking “Setup.exe” and follow the instructions. The 3DEXPERIENCE values will be received from the registry if possible.

In the installation directory the file Report.txt is stored. It describes where the customized 3DEXPERIENCE environment for the batch can be found.

Make sure that the %JAVA_HOME% in your 3DEXPERIENCE environment is set correctly and points to a valid Java runtime.

You should add the following best practice settings to the environment:

XPG_ACTIVATE_3DPART=1	activate the 3D Part support
XPG_ACTIVATE_NONCADDDOC=1	activate the Non-CAD document support
XPG_ACTIVATE_MAPPED_REVISIONFAMILY=1	activate the mapped Revision Family support
ENABLE_DETAILED_REPORT=1	enable a detailed report

7.2 Additional Configuration for Post Processing for XPDM

Additional configuration steps are required if you import any files to 3DExperience or export via XPDM.

7.2.1 Copy required library from the 3DEXPERIENCE environment

This is only needed if "Set Maturity of Rep Children", "Set Maturity of Rep" or "Add configured material" is configured.

Copy the file **eMatrixServletRMI.jar** to

```
...\XCI_3DX_BATCH_R<XXXX>_V<XXX>\win_b64\fromServer\docs\java
```

You can find this file on the 3DEXPERIENCE server host: <3DEXPERIENCE installation directory>\server\win_b64\docs\java

In some cases the following files in

```
...\XCI_3DX_BATCH_R<XXXX>_V<XXX>\win_b64\fromServer\code\bin
```

 may have to be replaced with updated files from your 3DX Server installation after installation of a 3DX Fix Pack (you can check the installation with CheckServerConnection.bat):

```
mxUtil.dll, vgalaxy7k.dll
```

You can find these files on the 3DEXPERIENCE server host: <3DEXPERIENCE installation directory>\studio\win_b64\code\bin)

```
eMatrixMqlU.dll
```

You can find this file on the 3DEXPERIENCE server host: <3DEXPERIENCE installation directory>\adk\win_b64\code\bin).

7.2.2 Configuration of the TSI 3DEXPERIENCE xPDM Post Process behavior

TSI 3DEXPERIENCE xPDM Post Process comes with the configuration file

```
...\XCI_3DX_BATCH_R<XXXX>_V<XXX>\win_b64\reffiles\TCIXpgConfig.xml
```

The TCI Server URL must be configured in TCIXpgConfig.xml file. The TCIXpgPostProcess_SERVERURL attribute must point to the TCI installation:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<TCIXpgConfig>
  <Attribute name="TCIXpgPostProcess_SERVERURL"
    value="http://my.tci-integration-server.url:port/XCI"/>
</TCIXpgConfig>
```

The following connectivity information for the Enovia server must be provided is specific options are used (eg. TCIXpgPostProcess_REPAIRINSTANCE=ON):

Server URL of 3DEXPERIENCE server (https://enovia-server.url:port/3dspace)

```
TCIXpgPostProcess_ENOVIA_SERVERURL=<3DEXPERIENCE Server URL>
```

- It is mandatory to include the port in the URL. :443 for https and :80 for http if you did not choose a different port.

3DEXPERIENCE user name

This 3DEXPERIENCE user has to be ENOVIA business and system administrator. You should use the same 3DEXPERIENCE user that is used for the XPDM import.

```
TCIXpgPostProcess_ENOVIAUSER=<3DEXPERIENCE user name>
```

Encrypted 3DEXPERIENCE password

```
TCIXpgPostProcess_ENCRYPTEDENOVIAPASSWORD=<encrypted password>
```

3DEXPERIENCE Vault (optional)

```
TCIXpgPostProcess_ENOVIAVAULT=<3DEXPERIENCE Vault>
```

If 3DPassport is used to check the 3DEXPERIENCE credentials:

```
TCIXpgPostProcess_USE3DPASSPORT=ON
```

7.2.3 Create an encrypted password for the TSI 3DEXPERIENCE xPDM Post Process

This step is only required if "Repair Instance" or "Set Maturity of Rep Children" is configured in the TSI 3DEXPERIENCE xPDM Post Process.

The TSI 3DEXPERIENCE xPDM Post Process needs a direct (MQL) login to the 3DEXPERIENCE server. To use the post-processing it is necessary to store the login information in the environment. As it is not allowed to store a plain password, TSI 3DEXPERIENCE xPDM Post Process uses an encrypted password.

Use the script "EncryptPassword.bat" to encrypt the 3DEXPERIENCE password. If you use the 3DEXPERIENCE environment file <Your Path>\XCI_3DX_BATCH_<3DX-version>_<XCI-version>\config\XCI_3DX_BATCH_Env.txt (created during the installation of this batch utility collection) you can just double click the batch file. If you use a different environment file you drag and drop your environment file on the script "EncryptPassword.bat", or use a command window:

```
C:\<Your Path>\XCI_3DX_BATCH_<3DX-version>_<XCI-version>\config\EncryptPassword.bat <path>\<your env-file.txt>
```

You have to encrypt the password using the same Windows OS user that runs the XPDM import/export (XPGClientBatch service, or TSI3DXBatch). The encrypted password can be used on different hosts, as long as the import uses the same Windows user.

You will be asked for the password to encrypt:

```
Encrypt 3DEXPERIENCE password
type password:
```

After typing in your password the encryption is executed:

```
starting encryption ...
Encrypting password: *****
Encrypted password: <26e5d4eencrpted331846533ppassworddcbe21975ssample>
Insert encrypted password in TCIXpgConfig.xml
Press any key to continue . . .
```

Insert the password in the configuration file TCIXpgConfig.xml.

7.2.4 Test the TSI 3DEXPERIENCE xPDM Post Process environment

This step is only required if "Repair Instance" or "Set Maturity of Rep Children" is configured in the TSI 3DEXPERIENCE xPDM Post Process!

Use the script "CheckServerConnection.bat" to test your installation.

If you use the 3DEXPERIENCE environment file <Your Path>\TCI_3DX_XPP_<3DX-version>_<XCI-version>\config\XCI_3DX_BATCH_Env.txt (created during the installation of this batch utility collection) you can just double click the batch file. If you use a different environment file you drag and drop your environment file on the script "EncryptPassword.bat", or use a command window:

```
C:\<Your Path>\XCI_3DX_BATCH_<3DX-version>_<XCI-version>\config\EncryptPassword.bat <path>\<your env-file.txt>
```

You will get a warning if a needed library could not be loaded, or if one of the following settings is missing in the TCIXpgConfig.xml

- TCIXpgPostProcess_ENOVIA_SERVERURL
- TCIXpgPostProcess_ENOVIA_USER
- TCIXpgPostProcess_ENCRYPTED_ENOVIA_PASSWORD

If you get the message "login: Cannot get instance of matrix/db/Context", please check the following settings:

- wrong setting TCIXpgPostProcess_ENOVIA_SERVERURL
- wrong TCIXpgPostProcess_ENOVIA_USER / TCIXpgPostProcess_ENCRYPTED_ENOVIA_PASSWORD combination
- wrong / missing certificate (in case of https)
- wrong setting TCIXpgPostProcess_USE_3D_PASSPORT

This command also warns if the 3DEXPERIENCE user does not have the 3DEXPERIENCE privileges "system administrator" and "business administrator". These 3DEXPERIENCE privileges are required to repair an instance and to set the maturity of an imported object to a specified state:

TCIMQL Library build: Mar 31 2016 16:18:16

3DEXPERIENCE server version: 3DEXPERIENCE R2015x HotFix 5

!!! User MigratUsr does not have required ENOVIA business privileges !!!

!!! User MigratUsr does not have required ENOVIA system privileges !!!

8 Installing the license manager

8.1 Remarks

The TCI requires licman20 as its license manager.

Licman20ptf19 is recommended.

For the installation of Licman please refer to the Licman documentation.

http://www.cmi-support.com/ftp_pub/download/licman/licman20.pdf

During the installation of the Licman, you have to specify a temporary working directory. Choose a directory where the user has full access rights.

8.2 Running Licman as a regular executable on Windows

If you install Licman with the setup program on Windows, it will be run as a service and require administrator rights. Beginning with ptf19, it is possible to launch Licman as a regular executable when the TCI is started.

You need to set the license path variable:

```
SET LICMAN_LICENSE_PATH=<port>@<host>
```

Then call `licman20_lld.exe` as a regular executable.

No execution of the setup routine is required in this case.

For more information, see *Licman User Manual*.

9 Installing the COMReconV5 package

If V5ToV6Preprocessing or V6ToV5Postprocessing is enabled, the COMReconV5 package must be installed.

9.1 Installation

The COMReconV5 package is delivered as an zip file (e.g. COMReconV5_R28.zip).

9.1.1 Unzip the COMReconV5 package

Unzip the package to disk (e.g. C:\TCI\COMReconV5_R28 see Figure 12: COMReconV5 package content) at the TCI install host (where the TCI web application is installed).

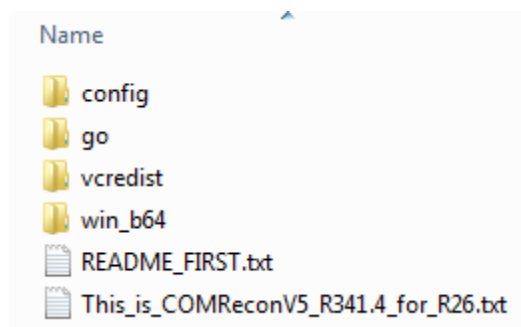


Figure 12: COMReconV5 package content

9.1.2 Create CATIA V5 environment file

Copy the CATIA V5 environment file to the config folder. Open the copied Environment file and enhance the PATH variable with the win_b64 folder as shown in the following example.

```
PATH=C:\TCI\COMReconV5_R28\win_b64;C:\Program Files\Dassault  
Systemes\B28\win_b64\code\bin;...
```

9.1.3 Configuration

Then open the go\COMReconV5.bat file for edit and customize the 4 environment variables to your environment and save the file.

```
rem -----  
rem Please customize following variables for your environment.  
rem  
rem Installation directory of COMReconV5.  
rem Example: C:\TCI\COMReconV5_R28  
set COMRECONV5_INSTALL_DIR=C:\TCI\COMReconV5_R28  
rem  
rem Installation directory of CATIA.  
rem Example: C:\Program Files\Dassault Systemes\B28  
set CATIA_BASEDIR=C:\Program Files\Dassault Systemes\B28  
rem  
rem Directory where to find CATIA env-files.  
rem Example: C:\TSI\CATEnv  
set CONVERTER_ENVDIR=C:\TCI\COMReconV5_R28\config  
rem
```

```
rem Filename (without extension) that will be used by CATIA batch client.  
rem Example: COMReconV5_R28  
set CONVERTER_ENVFILE=COMReconV5_R28  
...
```

9.1.4 Install Microsoft Visual C++ Redistributable Packages

Login as user with administrative rights and install all the Microsoft Visual C++ Redistributable Packages from the vcredist folder.